



TOP BEND 1010

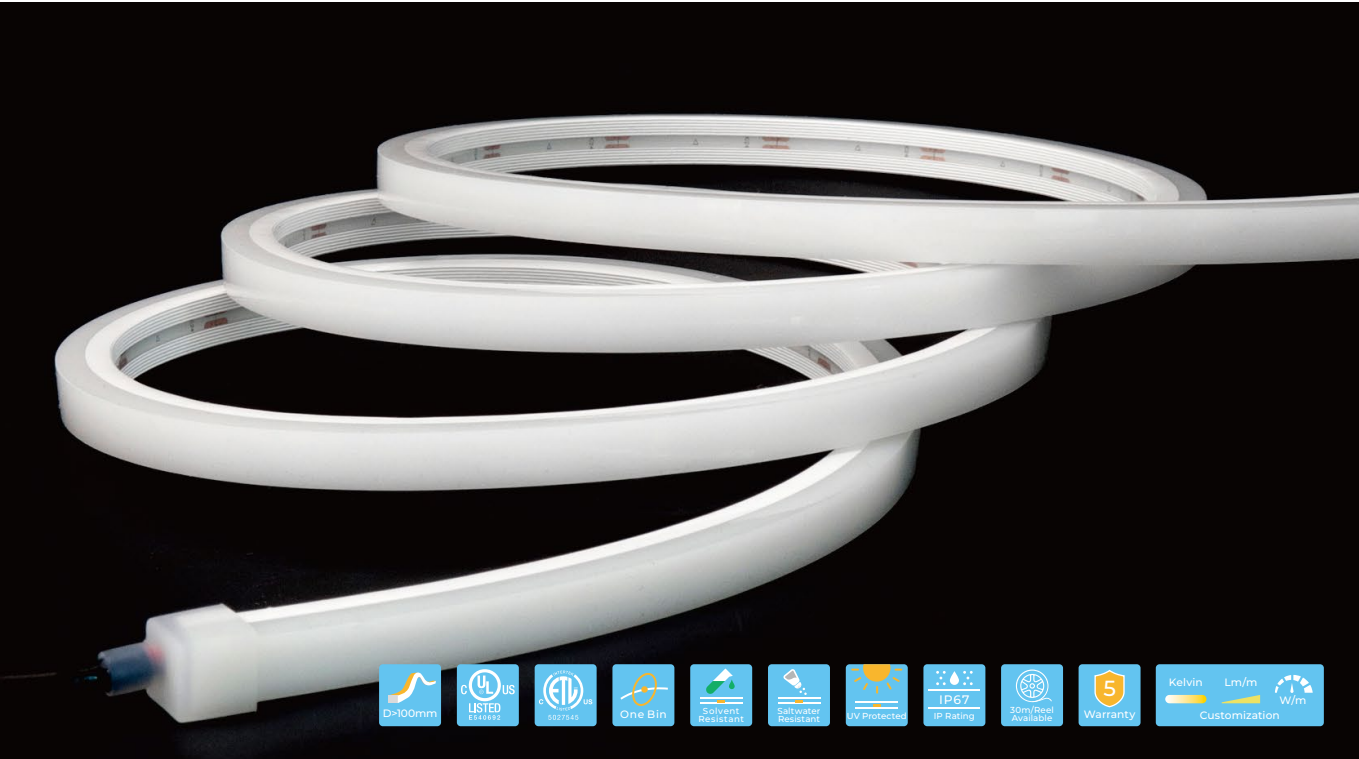


10mm slim luminous surface with 3-sided light emission, ideal for indoor outlines. Tri-color silicone extrusion with a clear window for easy cutting. Dust-resistant matte finish ensures a clean look with uniform, natural light. 5 years warranty, lifespan ≥ 50,000 hours, 1 Bin.



Light Distribution Curve (24V, 10W, 4000K)

Dimensions

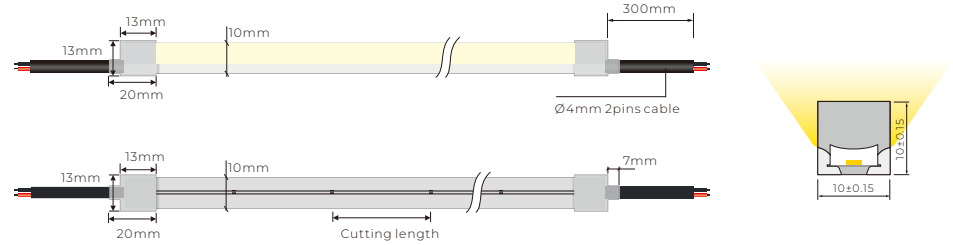

Basic Parameters

Model No.	NS-T1010	
Voltage	DC24V	
Power(w/m)	5w/10w	
Storage Temperature	-25°C~60°C	
Ambient Temperature	Tamin=-25°C, Tamax (Table below)	
Output	Low Output	Std Output
Power(w/m)	5w	10w
Max. Ambient tempt.(Tamax)	55°C	45°C



Single Color

Voltage	DC24 V
Circuit Design	CV
Power(w/m)	5W/10w
Max. Run Length	5m
Cutting Length	35.7mm

Parameters

CRI	CCT	lm/m	w/m	lm/w
>90	2100K±150	645	10	64.5
	2400K±150	685	10	68.5
	2700K±150	740	10	74
	3000K±150	790	10	79
	3500K±200	720	10	72
	4000K ⁺⁴⁰⁰ ₋₂₀₀	830	10	83
--	5000K ⁺⁵⁰⁰ ₋₂₀₀	830	10	83
	6500K ⁺²⁰⁰ ₋₆₀₀	810	10	81
	Red	330	10	33
	Green	920	10	92
	Blue	175	10	17.5
	Yellow	300	10	30
--	Pink	350	10	35


Note:

- CV: Constant Voltage CC: Constant Current.
- Max. Run length refers to single side feed in serial connection.
- The given color temperature is the temperature of finished products.
- The given data are typical values. Due to tolerances of the production process and the electrical components,testing parameters can vary up to 10%.
- The Constant Current version supports PWM dimming, but the PWM frequency must be kept below 2kHz.



End Cap & Cable Lead Option

Silicone End Cap (IP67)

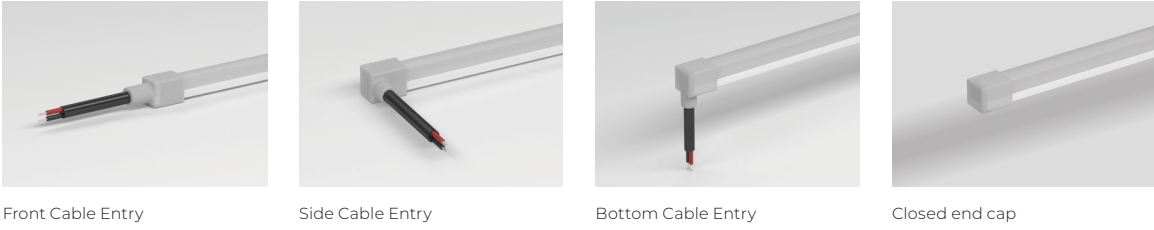

Integral end cap (IP44)



Accessories

