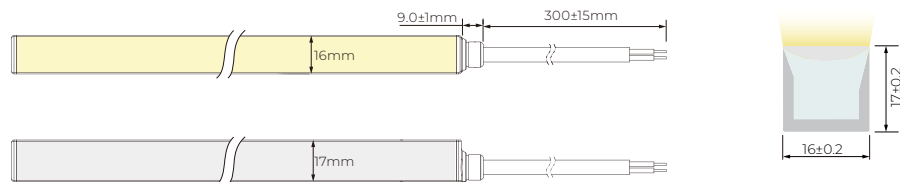


NEW

16mm wide luminous surface with top and side bending, ideal for versatile indoor, outdoor, and architectural lighting, meeting various installation needs. Unique design without a transparent cutting window to prevent light leakage, featuring a precise laser-cut mark on the silicone tube.

Dust-resistant matte finish ensures a clean look with uniform, natural light.

5 years warranty, lifespan ≥ 50,000 hours, 1 Bin.

01 | atluxlightings.com

Single color



RGBW

CRI	CCT	lm/m	w/m	lm/w
>90	2700K±150	737.6	10	73.8
	3000K±150	713.2	10	71.3
	3500K±200	740.6	10	74.1
	4000K±300	812.2	10	81.2
	5000K±400	800.1	10	80.0
	6500K±400	739.0	10	73.9
--	Red	335.7	10	33.6
	Green	933.1	10	93.3
	Blue	145.0	10	14.5
	Yellow	251.4	10	25.1
	Pink	668.3	10	66.8
	Orange	391.1	10	39.1

CRI	CCT	lm/m	w/m	lm/w
>90	2700K	368.3	5	73.7
	6000K	375.0	5	75.0
	2700K+6000K	740.2	10	74.0

CRI	CCT	lm/m	w/m	lm/w
--	R	71.9	3.3	21.8
	G	208.4	3.3	63.1
	B	40.6	3.3	12.3
	RGB	3231	10	32.3

CRI	CCT	lm/m	w/m	lm/w
--	R	69.3	3.75	18.4
	G	214.2	3.75	57.1
	B	41.8	3.75	777
>90	4000K±300	1771	3.75	47.2
	RGBW	497.7	15	33.1



SPI RGB

Voltage	DC24 V
Circuit Design	CV
Power(w/m)	12.5w
Max. Run Length	5m
Cutting Length	100mm

Parameters

CRI	CCT	lm/m	w/m	lm/w
--	R	67.7	4.8	14.1
	G	190.1	4.8	39.61
	B	29.5	4.8	6.15
	RGB	399.9	12.5	22.59

Note:

- CV: Constant Voltage CC: Constant Current.
- Max. Run length refers to single side feed in serial connection.
- The given color temperature is the temperature of finished products.
- The given data are typical values. Due to tolerances of the production process and the electrical components,testing parameters can vary up to 10%.
- The Constant Current version supports PWM dimming, but the PWM frequency must be kept below 2kHz.



End Cap & Cable Lead Option

Silicone End Cap (IP67)




Front Cable Entry





Closed End cap



Accessories



Aluminium Profile
Length: 1m/2m/3m



Aluminium Mounting clips
Length: 2cm

