




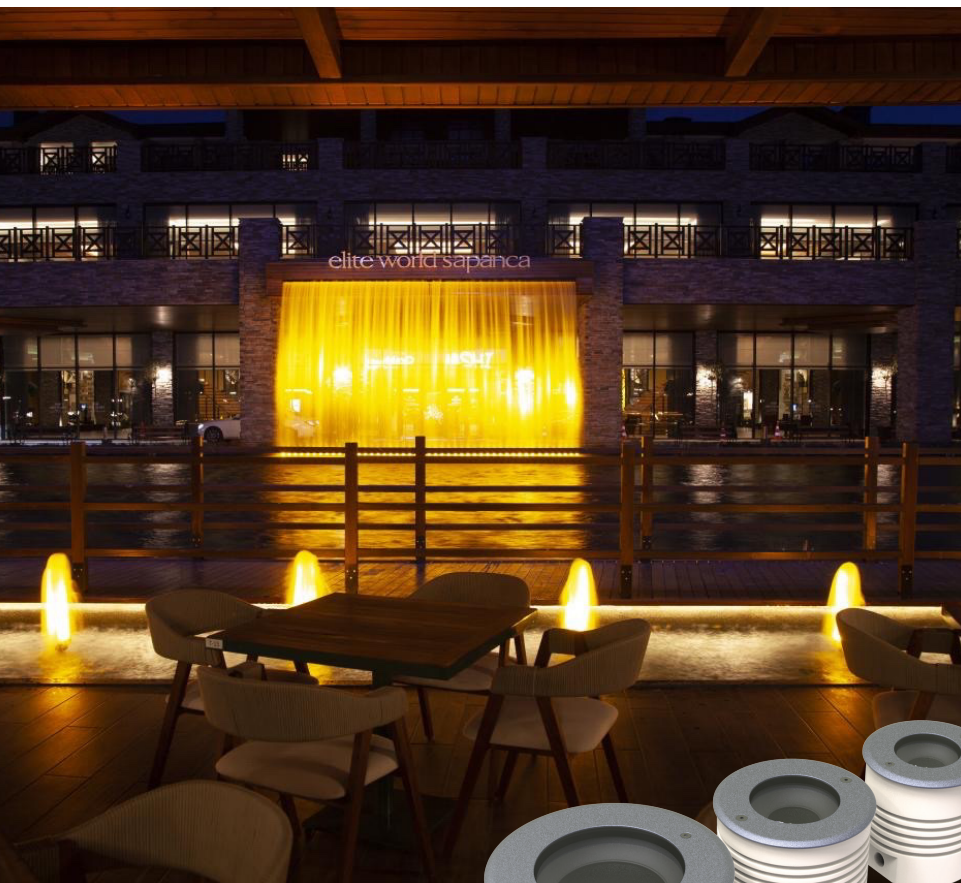

Dolli-Series
Inwater / Inground Light

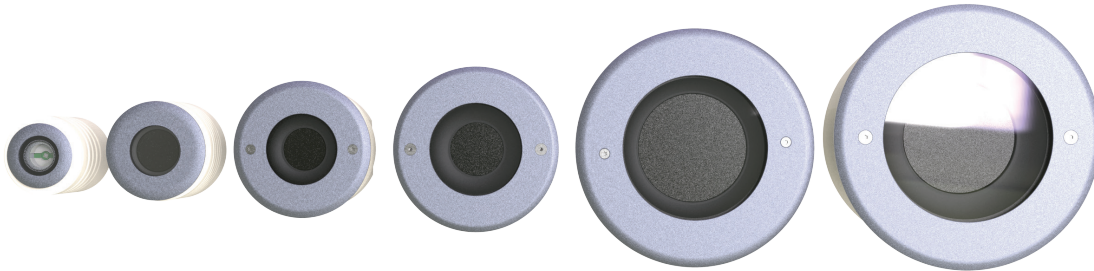


- Code Product: Dolli- Series
- Dimension: nS(Ø37.4x68.9), S(Ø54x72.8), M(Ø84x73.2), L(Ø98x66), X(Ø108x65), XL(Ø142x75.5), XXL(Ø172x77.5)
- Input Voltage: Option(12,24, 36,48VDC); 110-240VAC
- Power consumption: nS (1-2W); S(1-3W); M(5-7W); L(9-12W) X(15-22); XL(24-20W); XL(30-45W)
- Luminous Flux: 90Lm at 1W 4000K, 25deg at nS Series
190Lm at 3W 3000K, 15deg at S Series
890Lm at 9W 3000K, 60deg at L series
1480Lm at 15W 3000K, 36deg at X Series
- Brand of LEDs: LED CREE
- Color: 3000k(Color: 2700 - 6000K, RGB, RGBW)
- Angle: 30° (6°, 10°, 15°, 24°, 36°, 45°, 60°, 90°)
- Function Dimmer: PWM on Power
- Material: inground (body aluminium, face stainless 316)
in water full Stainless 316
- Finishing (Color housing): Stainless
- IP Class: 67 (application for Inground) /68 for Inwater
- Electrical Class: III



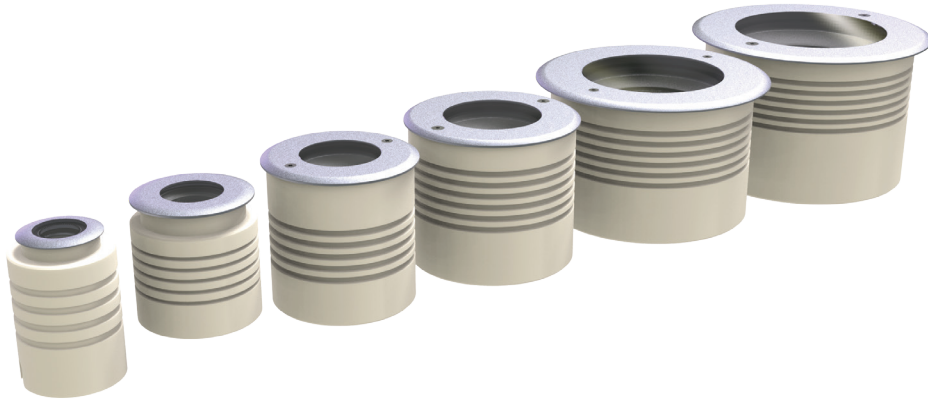


Pending


IP68

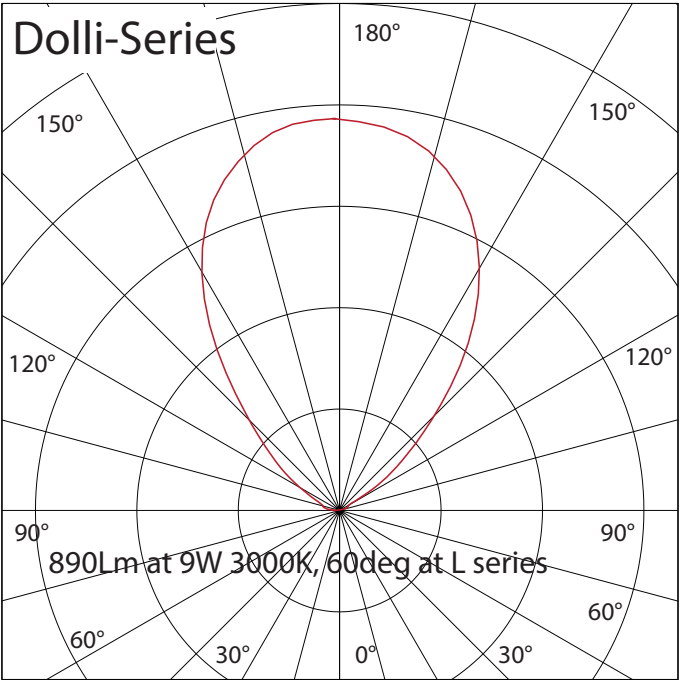


Product Description	
Control Gear	Fairchild Technology
LED Module	High-power LEDs on metal-core PCB. Collimating lens made of optical polymer/pmma
Anti-Glare	Option
Electrical Protection	EMC, inrush current
Electrical Class	3

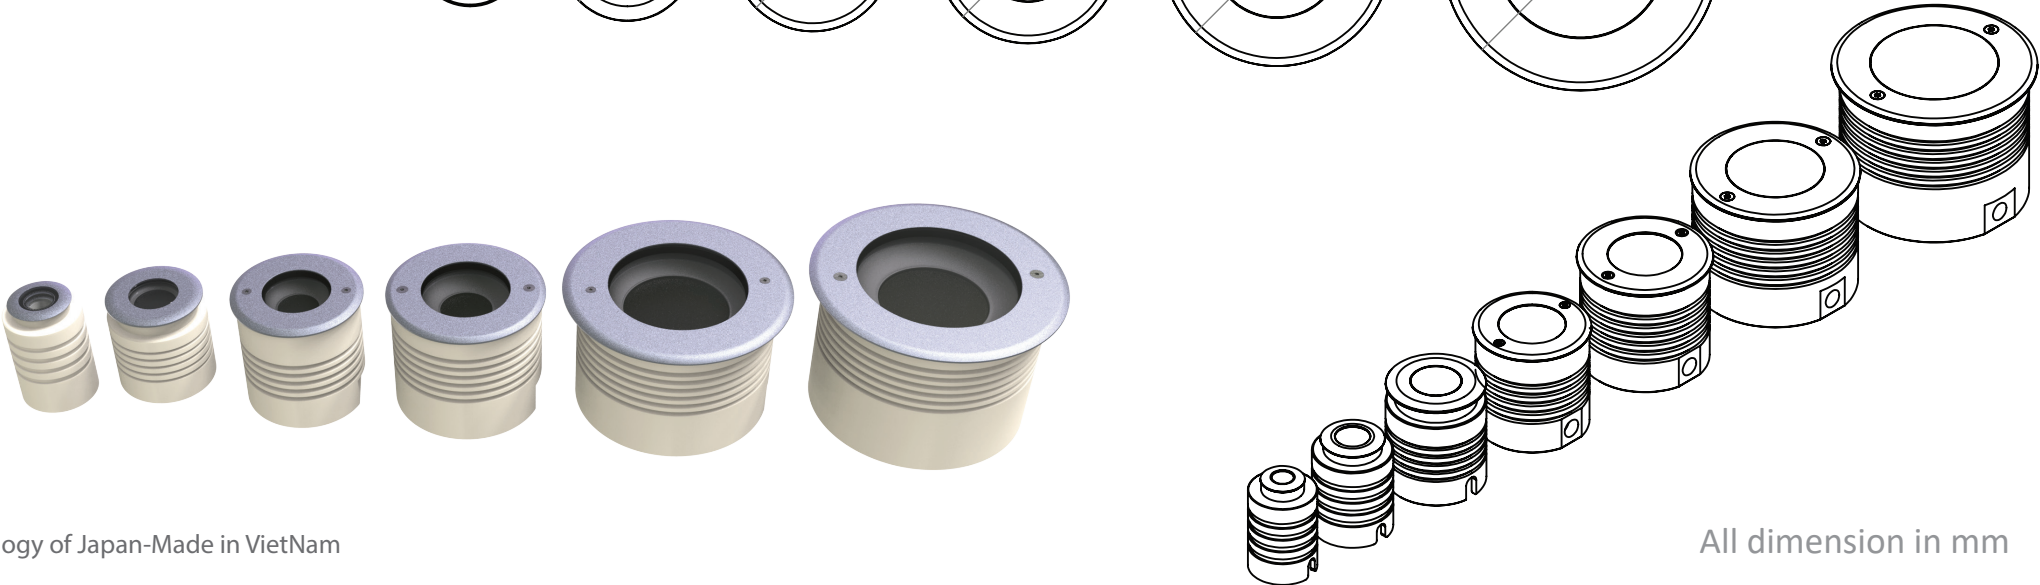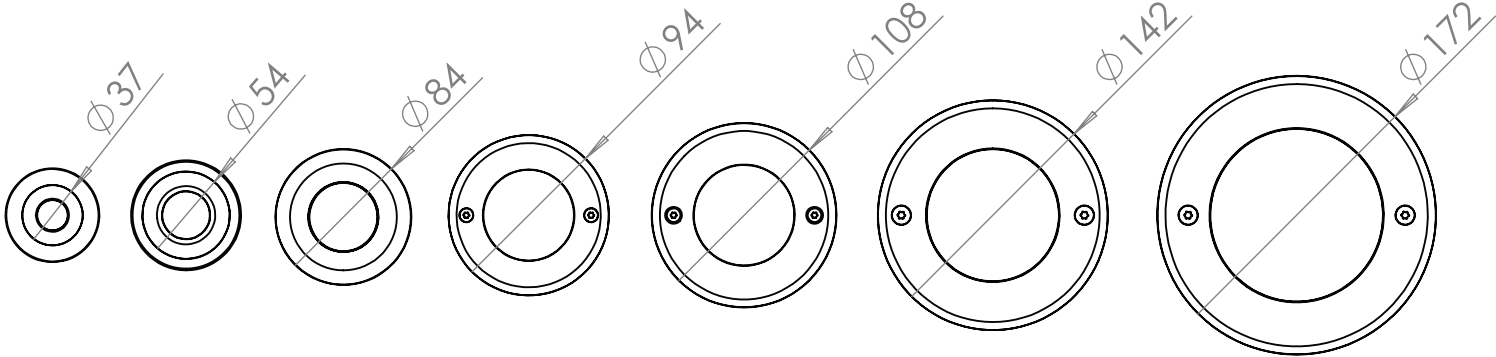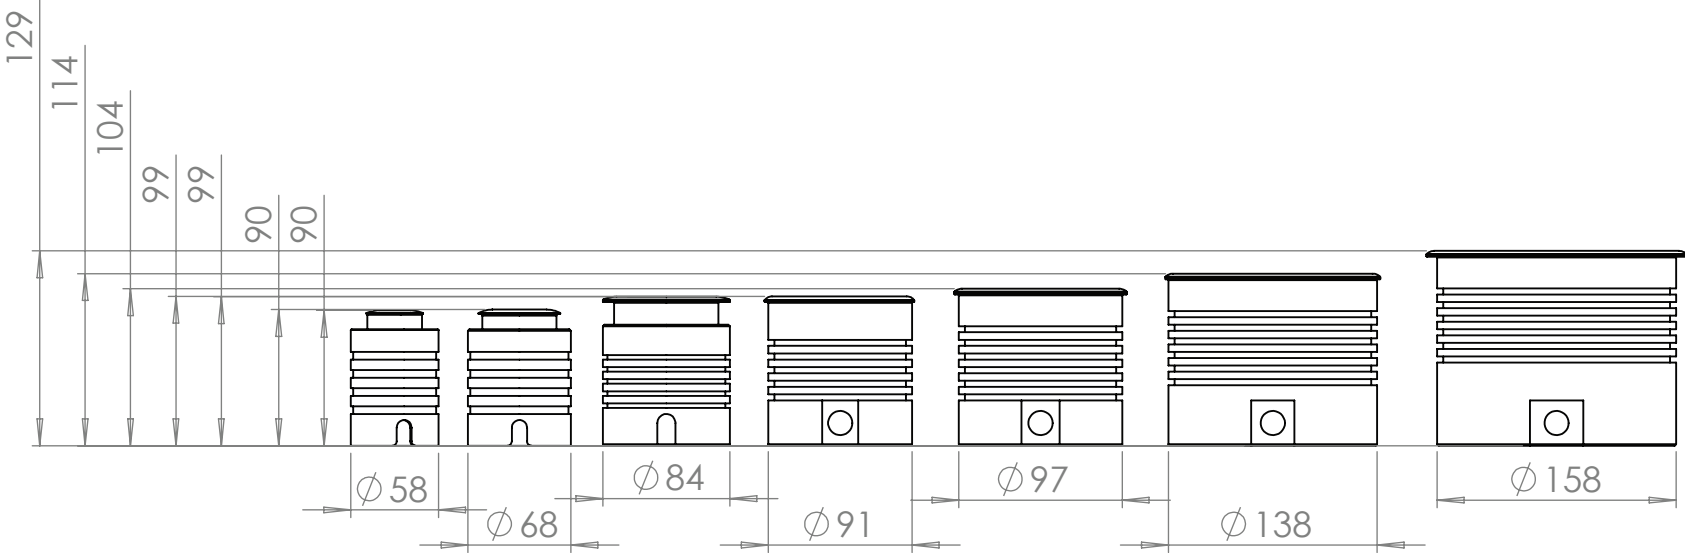


1

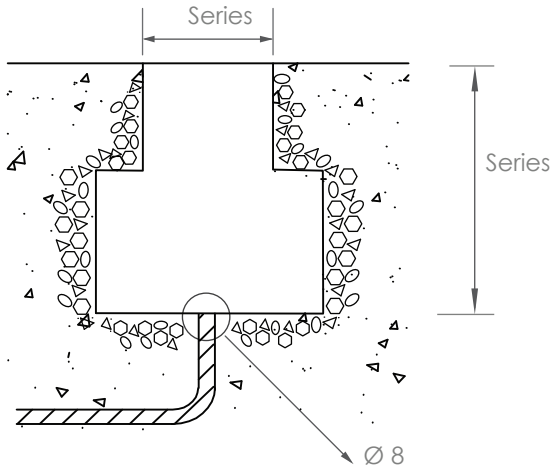


2








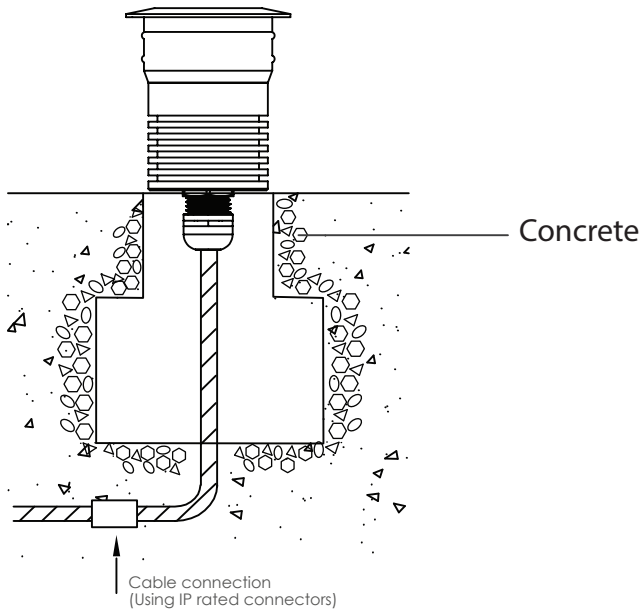



3

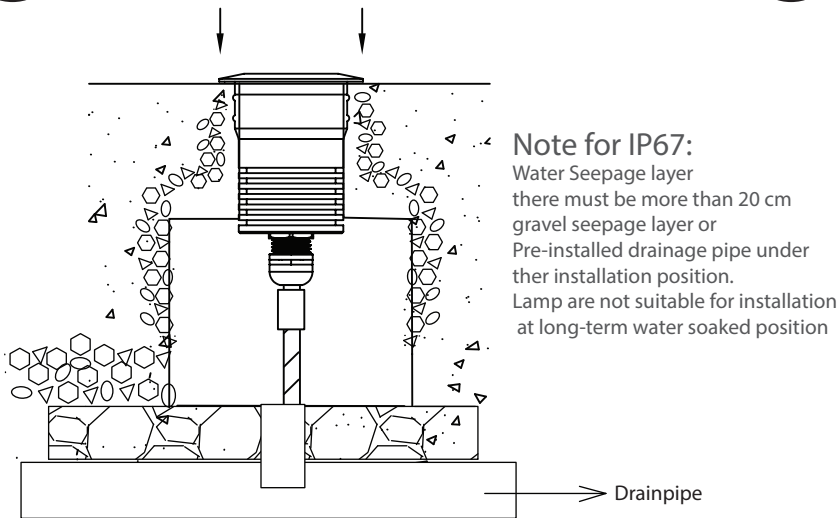


4

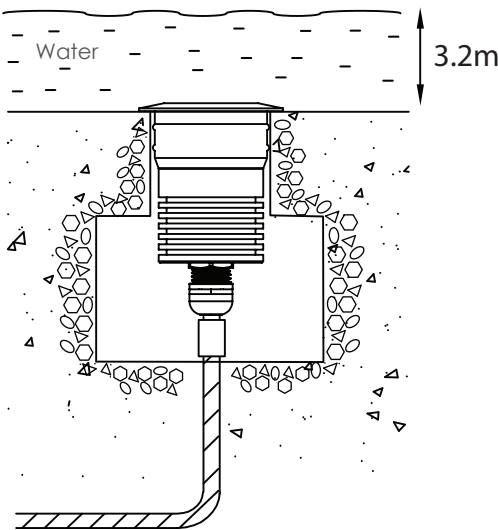


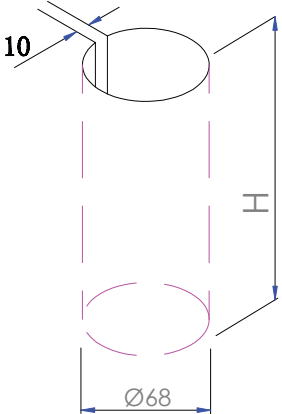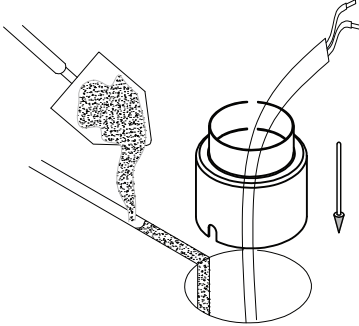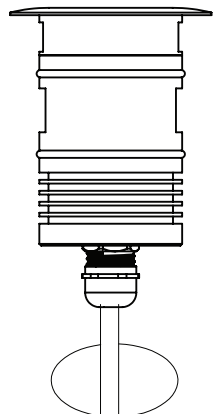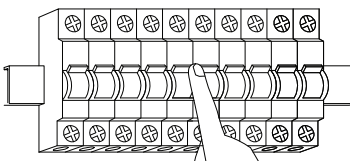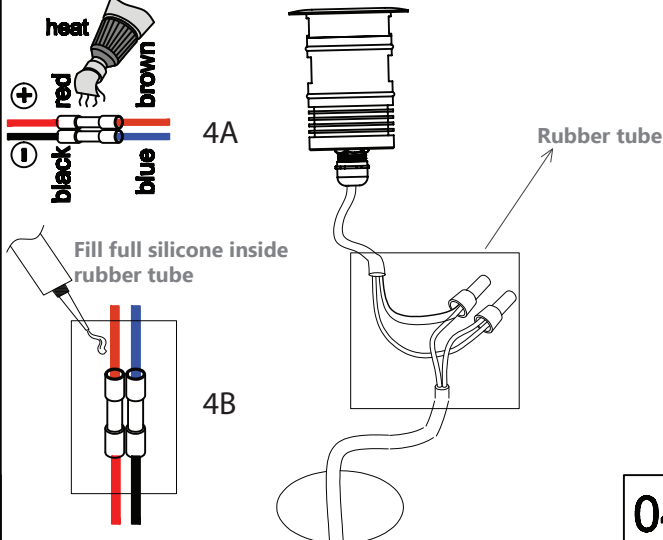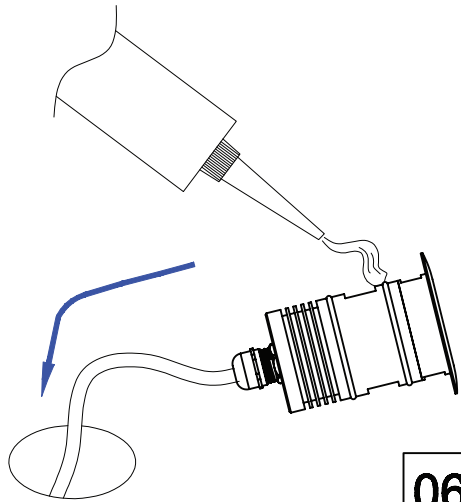
 10 H Ø68			 ON
 OFF	 heat red brown black blue 4A 4B Fill full silicone inside rubber tube Rubber tube		

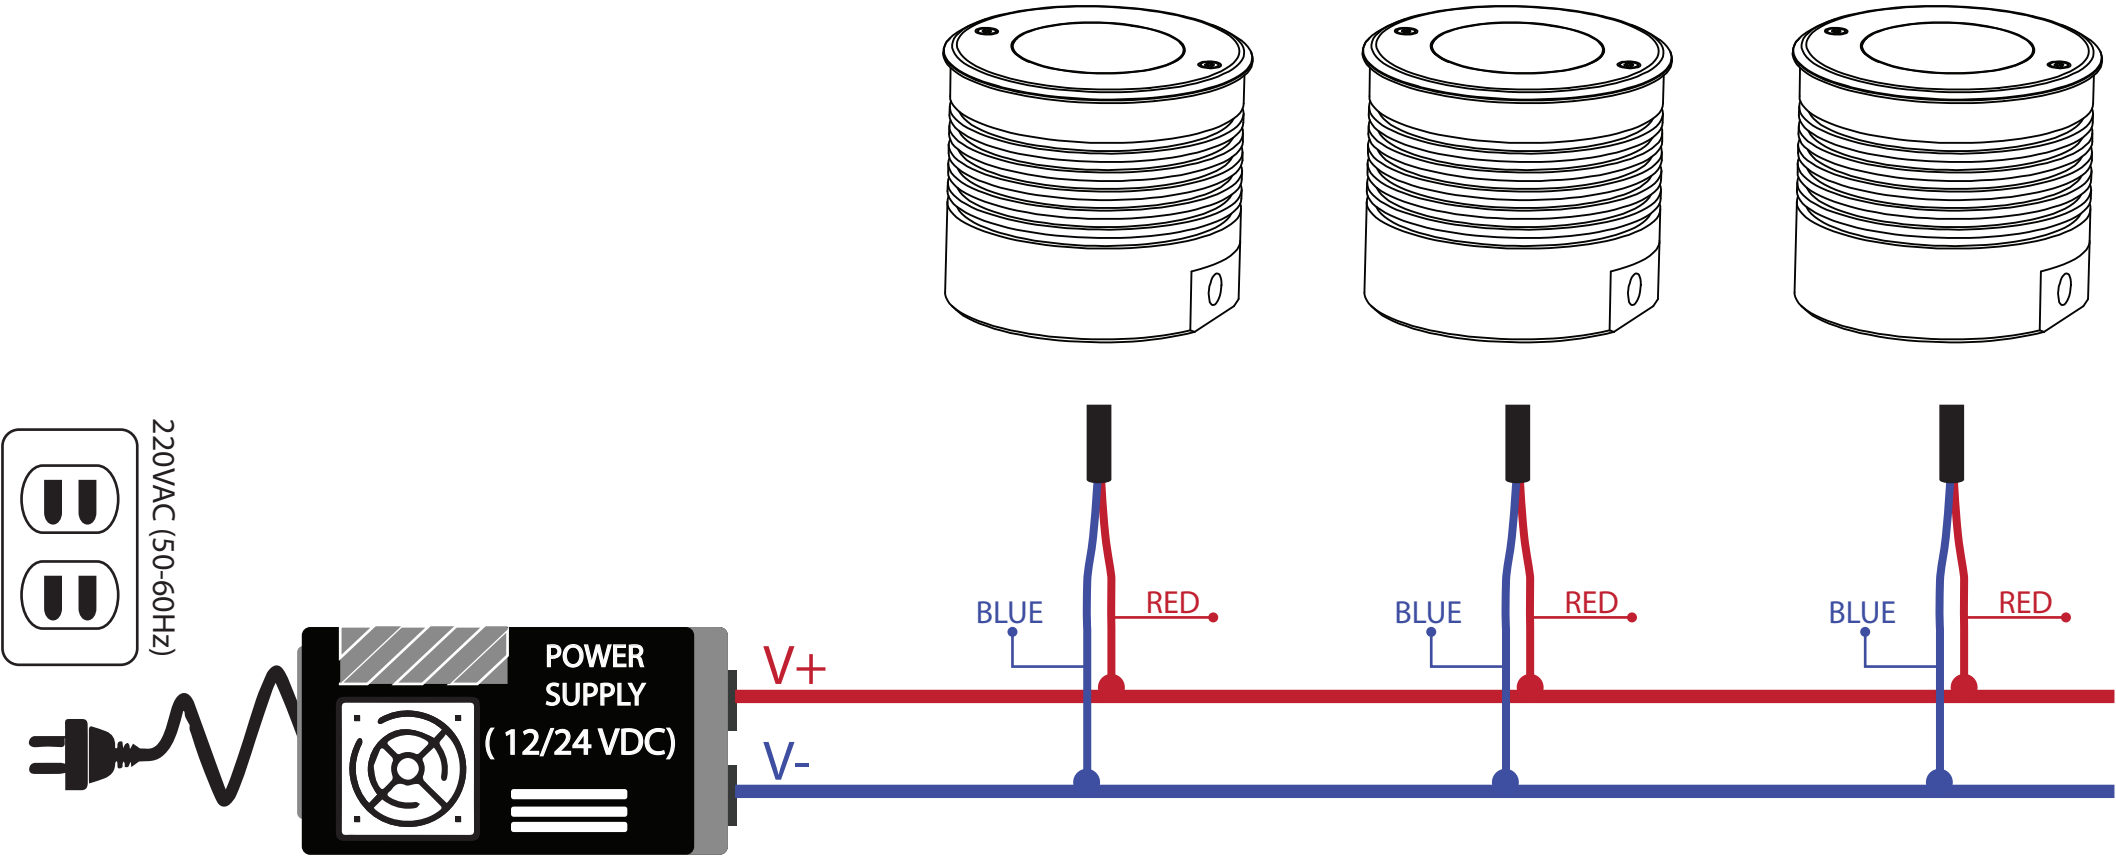

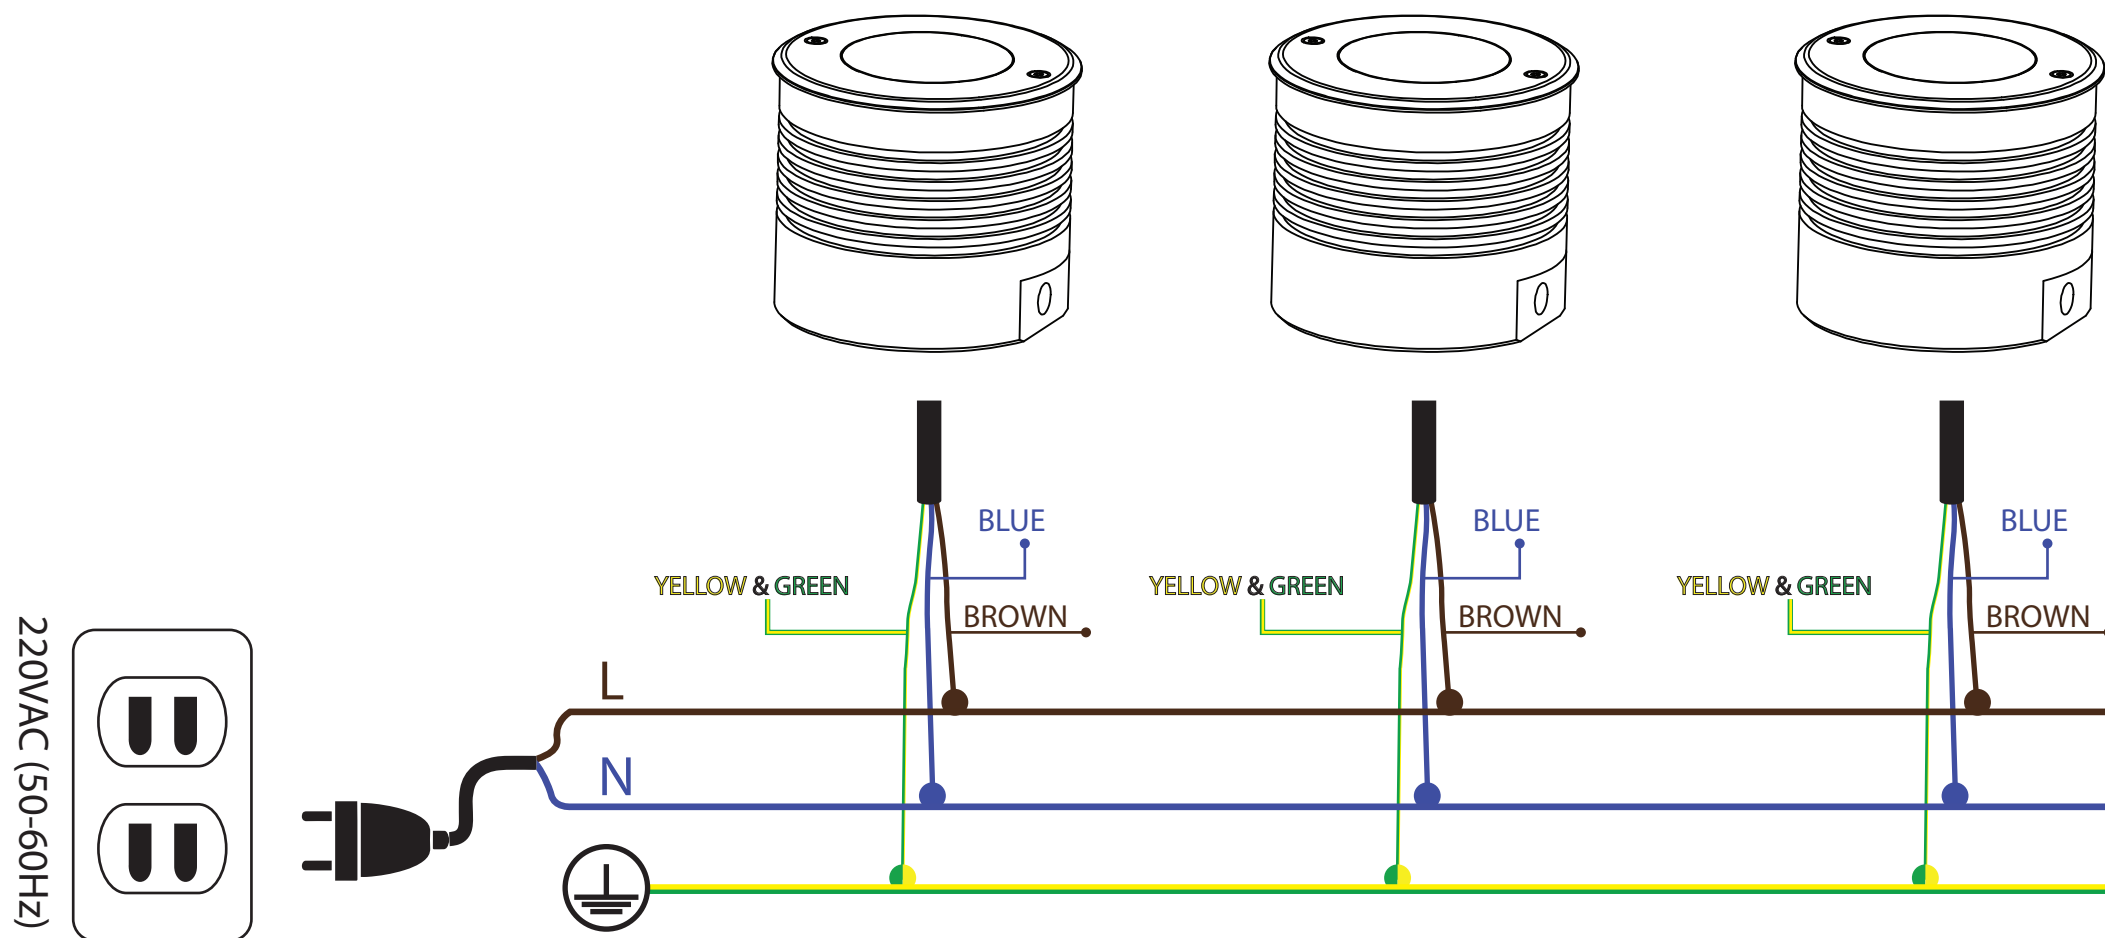

Note! Diagram only use for IP67 (Applcation for Inground)
Applcation for Series: L, X, XL, XXL

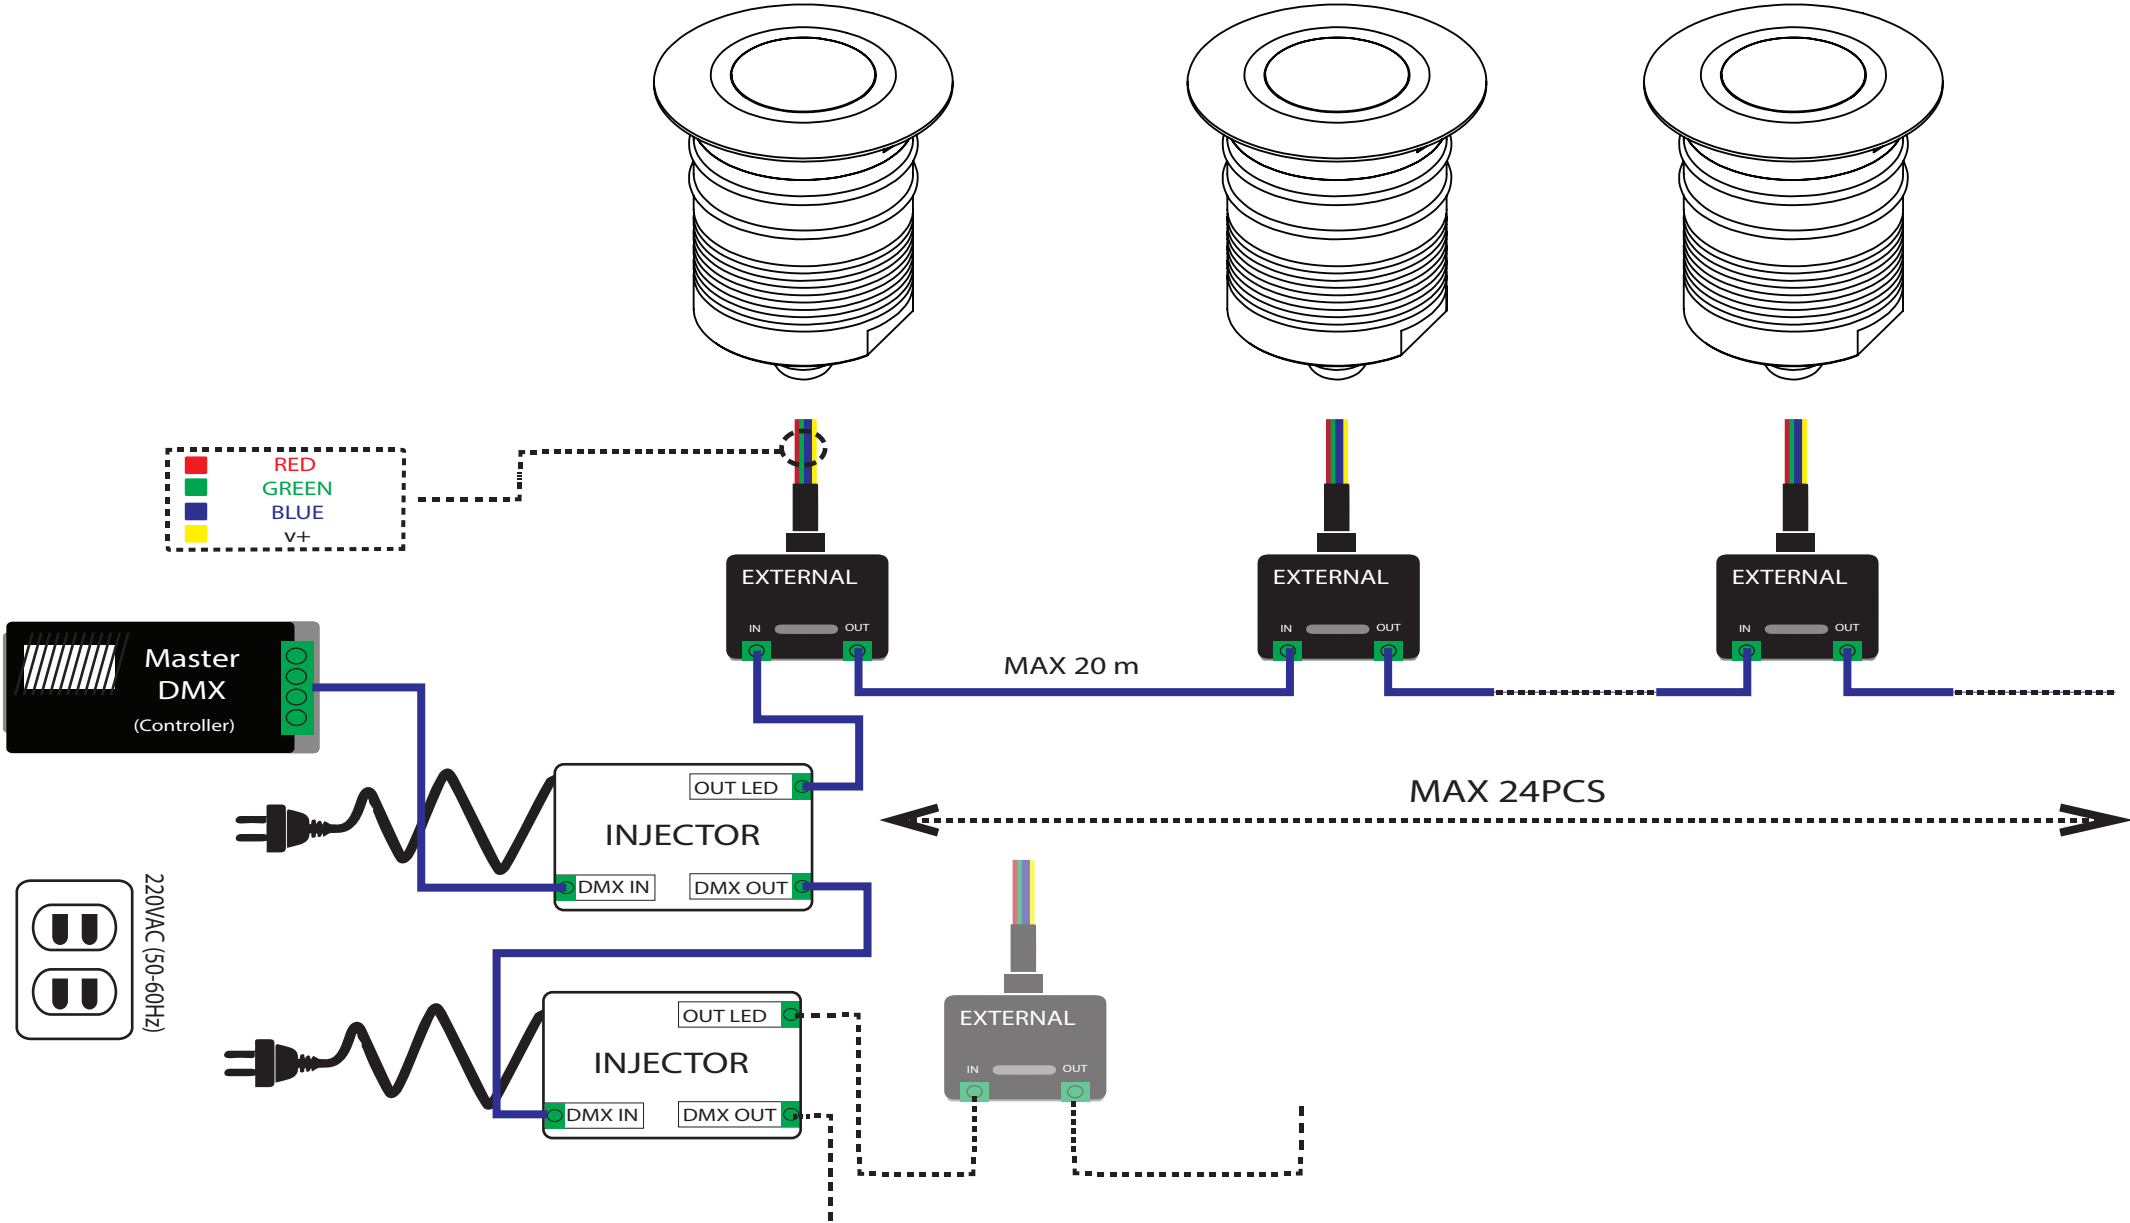



NOTE! Wire Color:
Red- V+
Black-V-
Brown - Data+
Blue-Data-

Max 30pcs

Loop Network
DMX512

Max 30pcs

Loop Network
DMX512

DMX512 with Auto Setting (iDMX512)
14bits resolution

Only use for models: L, X, XL, XXL

