



Faki-XL Series

Inground for Castle Lighting
with adjustable beam



- Code Product: Faki XL Series
- Dimension: Ø356mm x H294mm; Cutout: Ø377x294mm
- Input Voltage: 24VDC/110-240VAC (43-60Hz)
- Power consumption: 50-70W
- Luminous Flux: 6970Lm at 3000K, 70W
- Brand of LEDs: LED CREE
- Color: 3000K - CRI: > 80 (Single Color; RGB; RGBW)
- Beam Angle: 45° (orther angle please contact us) + Rotate : +/- 10Deg
- Function Dimmer: Option
- Material: Body: IP67-Body: Aluminium Anode ; Face: Inox316
- Finishing (Color housing): Stainless
- IP Class: 67 for Inground
- Electrical Class: III for DC, I for AC

- LED lifetime: 50.000hrs
- Lens: Clear
Cellular
Sand
- Standards:
 - +EMC protection
 - +IEC 62031 LED modules for general lighting Safety specifications
 - +IEC 60598 Luminaires – Parts 1+2: General requirements particular requirements and tests

Material PMMA
with UV protection


CREE



CE








IP67

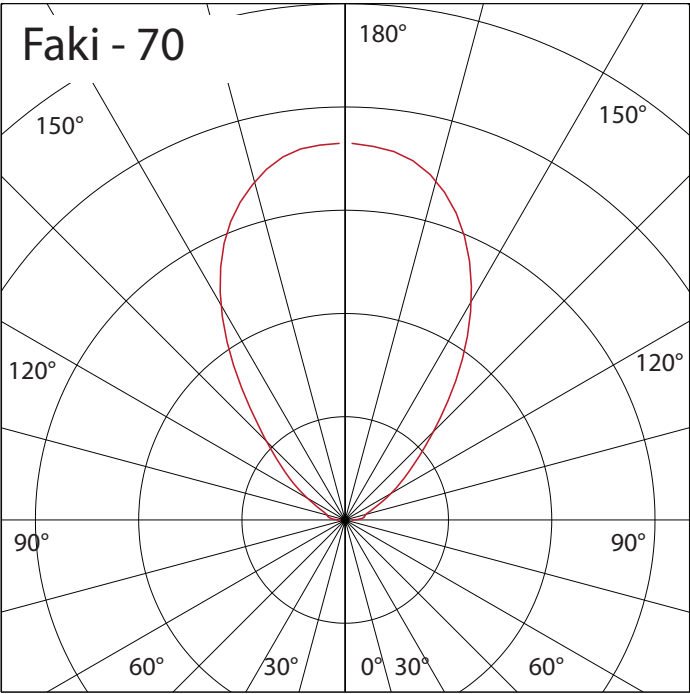


6970Lm at 3000K, 70W

Product Description	
Control Gear	Fairchild Technology
LED Module	High-power LEDs on metal-core PCB. Collimating lens made of optical polymer/pmma
Anti-Glare	Option
Electrical Protection	EMC, inrush current
Electrical Class	III for DC, I for AC input

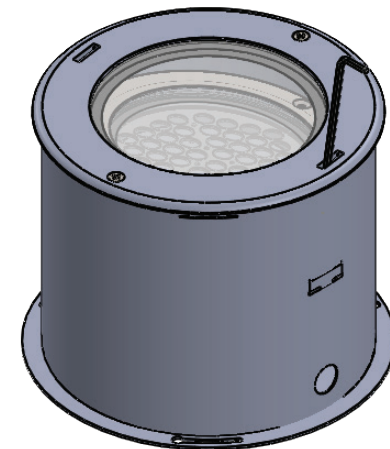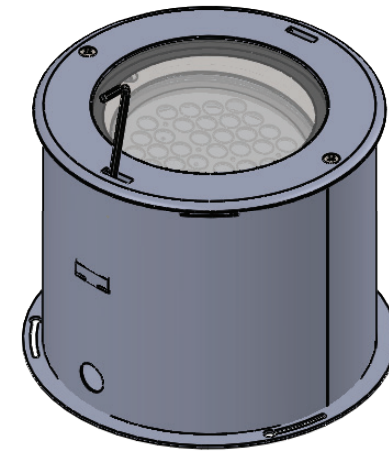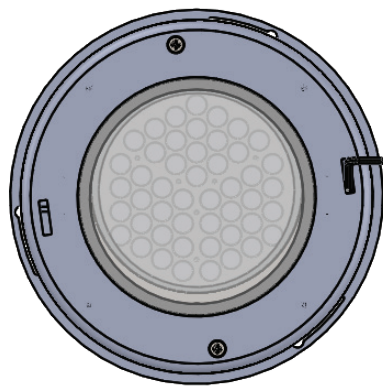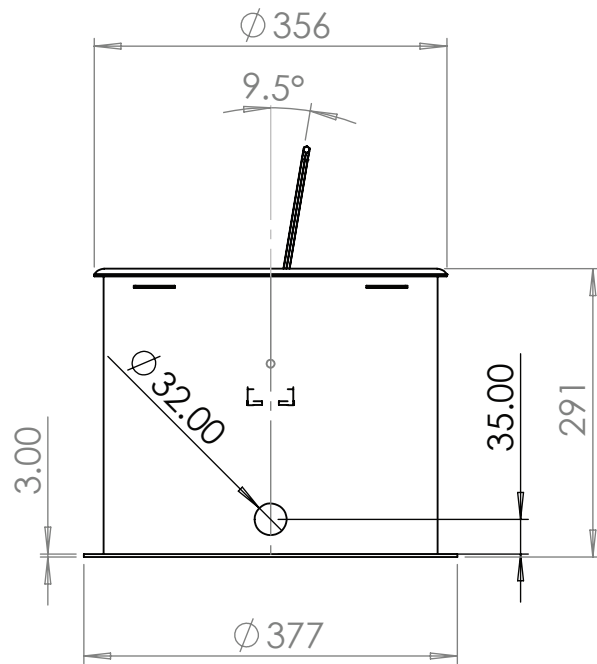


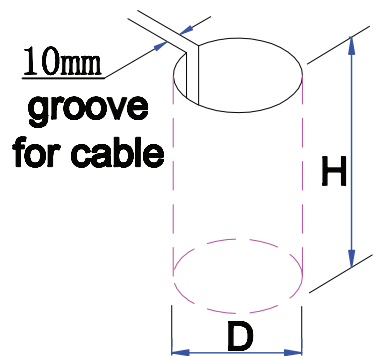


01

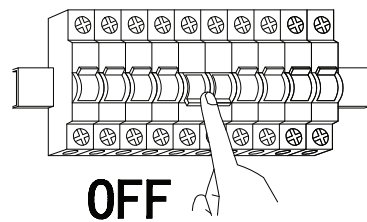


02

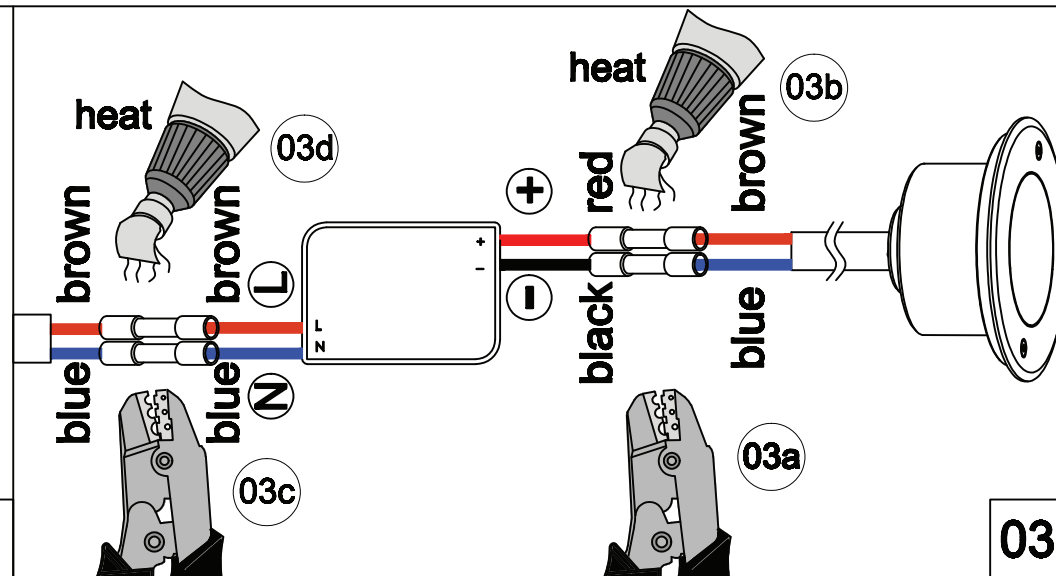


03

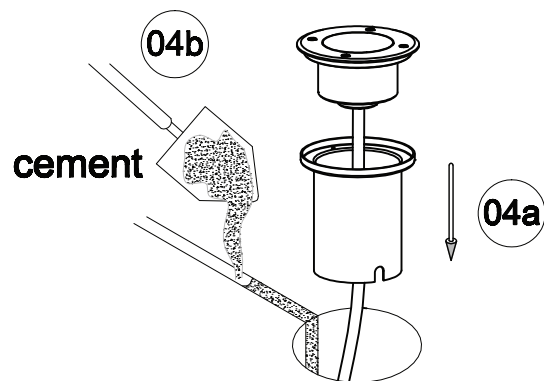


04

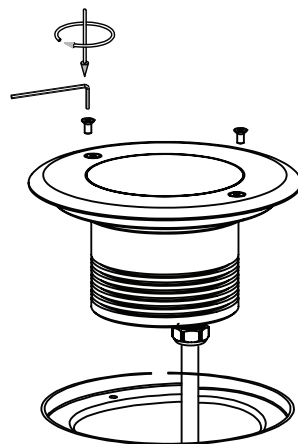

05

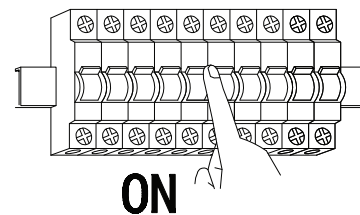


06




07


1

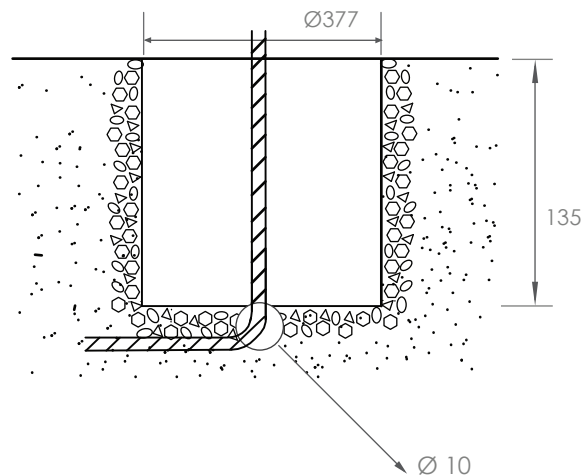


2

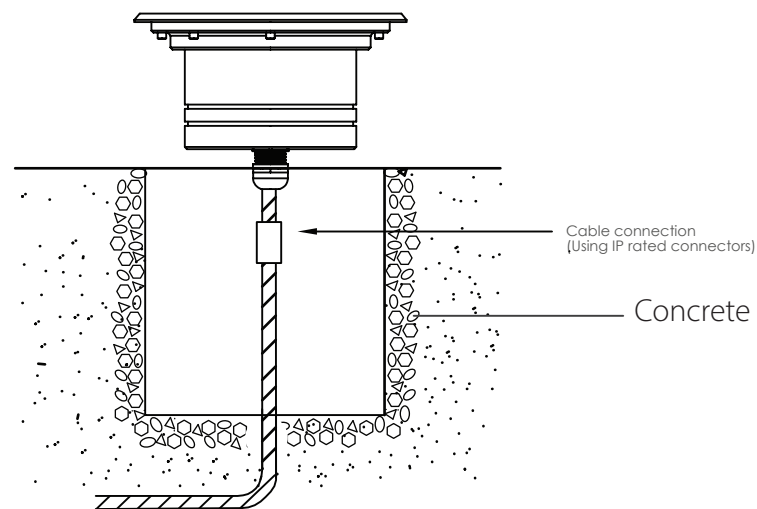



3

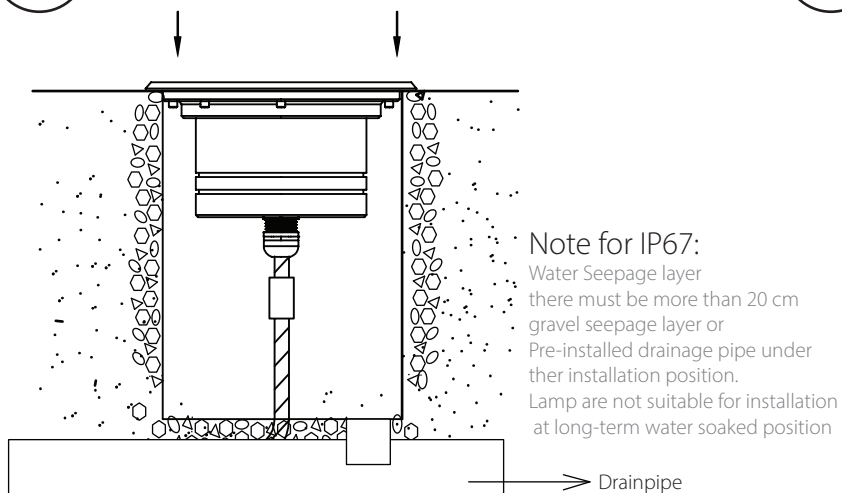


4

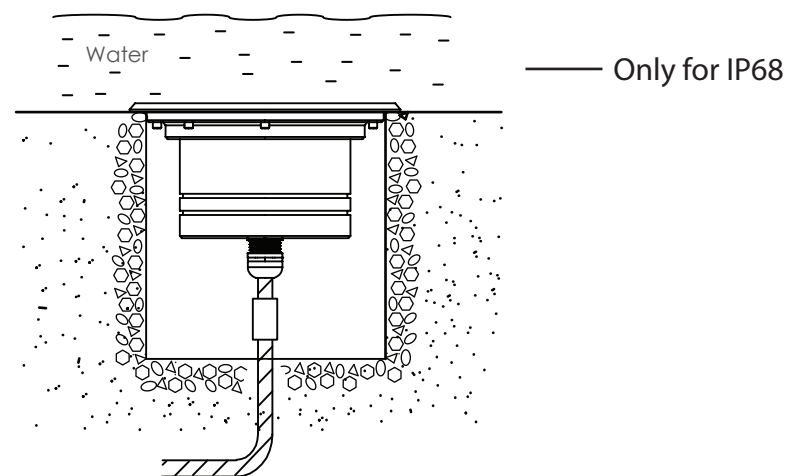

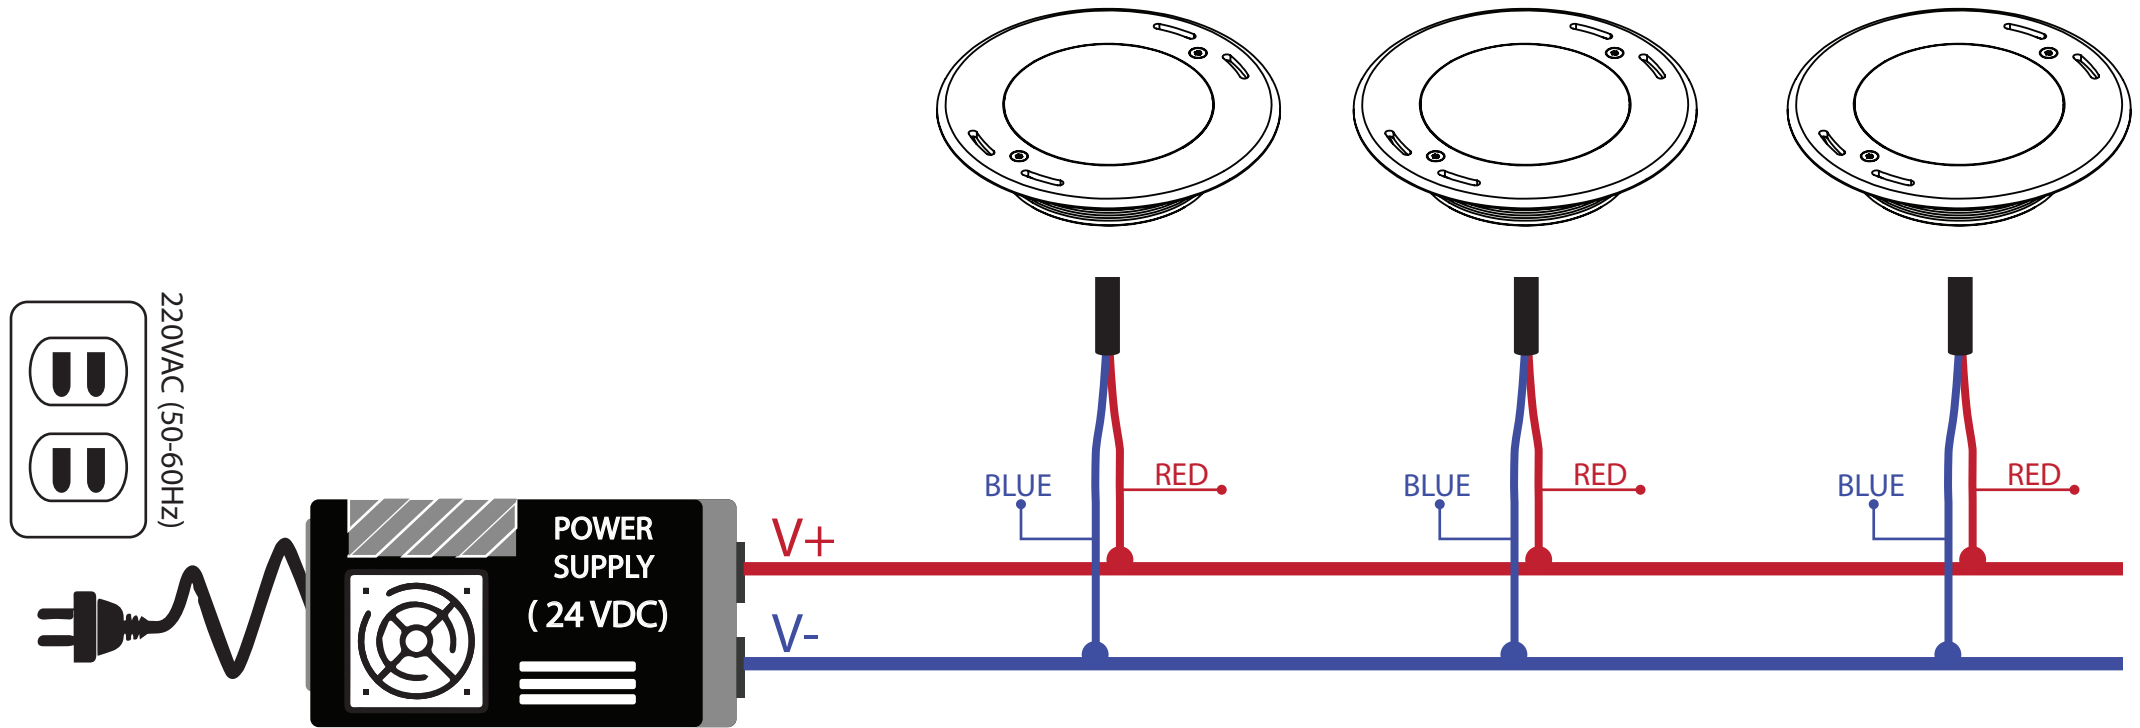

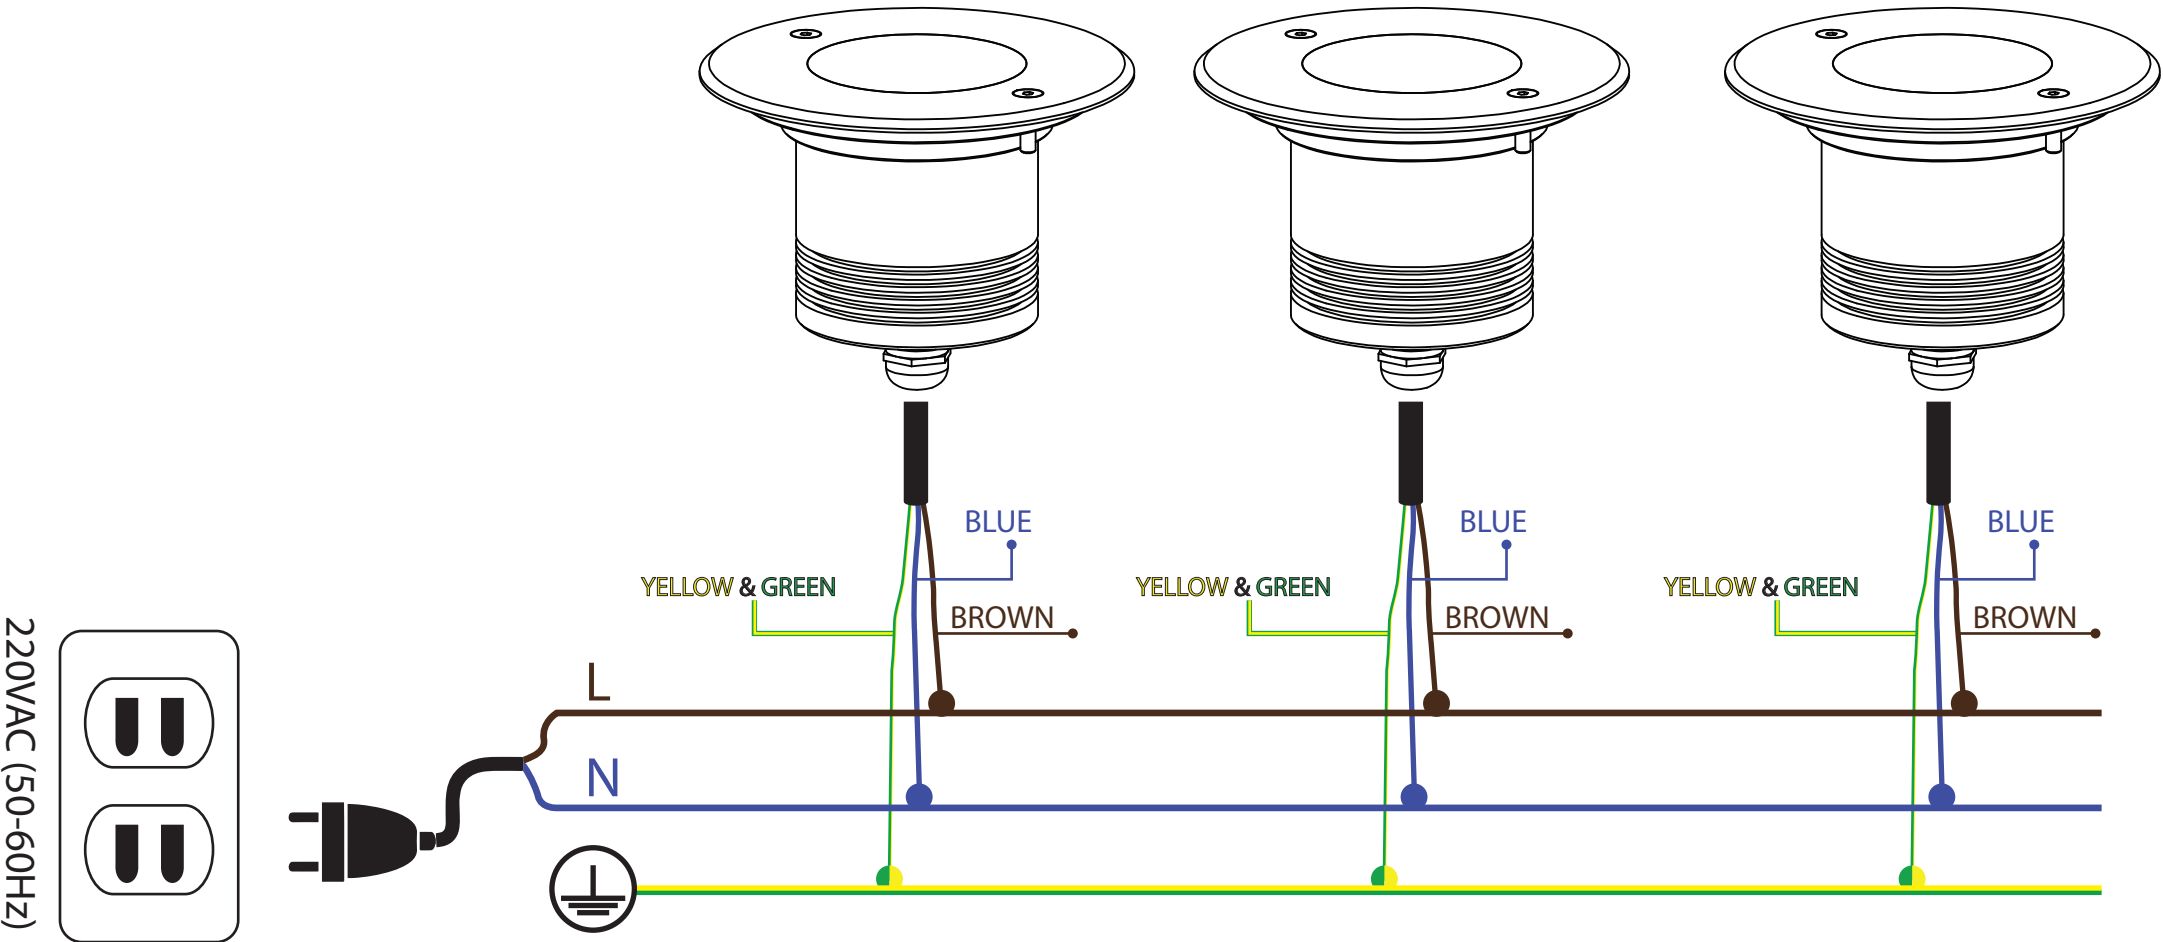



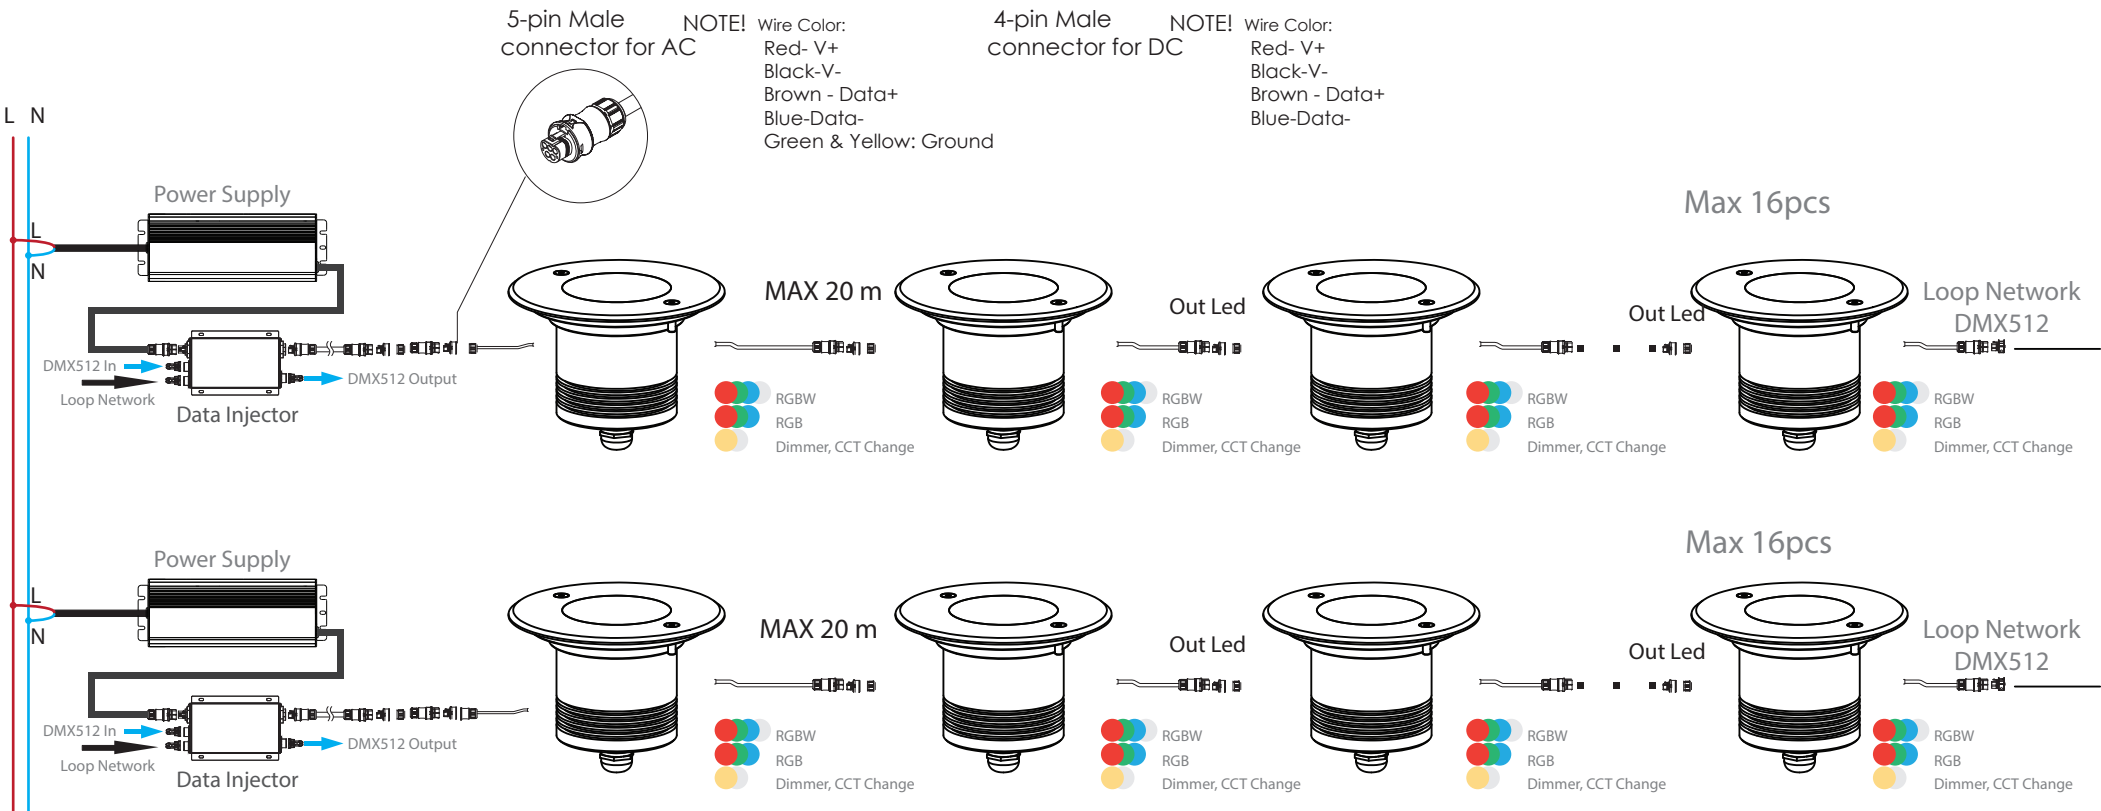

DMX512 with Auto Setting (iDMX512)
14bits resolution

