



sBury-16 Series
Inground Light



- Code Product: sBury-16-Series
- Dimension: 175mm x 175mm x 126
- Input Voltage: 24VDC/110-240VAC (43-60Hz)
- Power consumption: Series (16W-32W)
- Luminous Flux: 1680 Lm at 25W 3000K, 24VDC, CRI>80
- Brand of LEDs: LED CREE
- Color: 3000K - CRI: > 80 (Single Color; RGB; RGBW)
- Beam Angle: 24° (orther angle please contact us)
- Function Dimmer: Option
- Material: Body: IP67-Body: Aluminium Anode ; Face: Inox316
- IP68- Full Stainless 316
- Finishing (Color housing): Stainless
- IP Class: 67 for Inground; 68 for Inwater
- Class: III for IP68; I for IP67



- LED lifetime: 50.000hrs
- Lens: Clear
Cellular
Sand
- Standards:
 - +EMC protection
 - +IEC 62031 LED modules for general lighting Safety specifications
 - +IEC 60598 Luminaires – Parts 1+2: General requirements particular requirementsand tests


CREE



CE








IP67

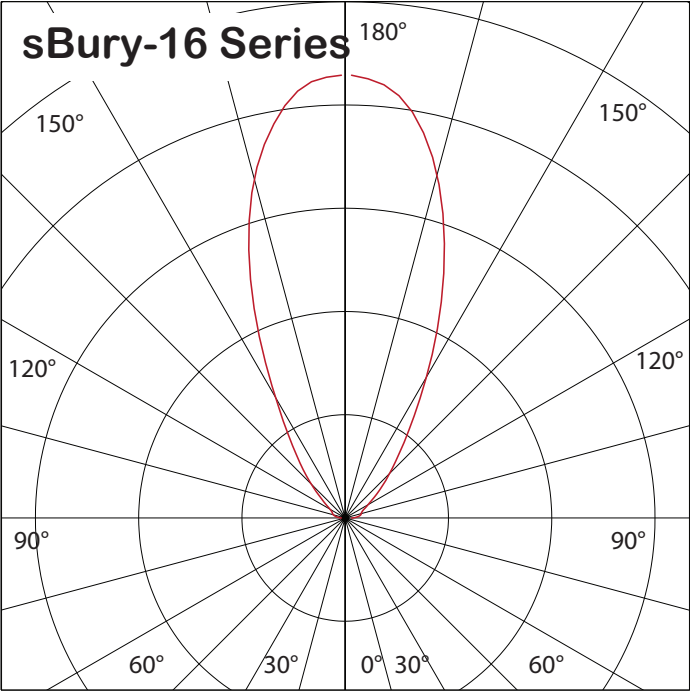


1680 Lm at 25W 3000K, 24VDC, CRI>80

Product Description	
Control Gear	Fairchild Technology
LED Module	High-power LEDs on metal-core PCB. Collimating lens made of optical polymer/pmma
Anti-Glare	Option
Electrical Protection	EMC, inrush current
Electrical Class	3

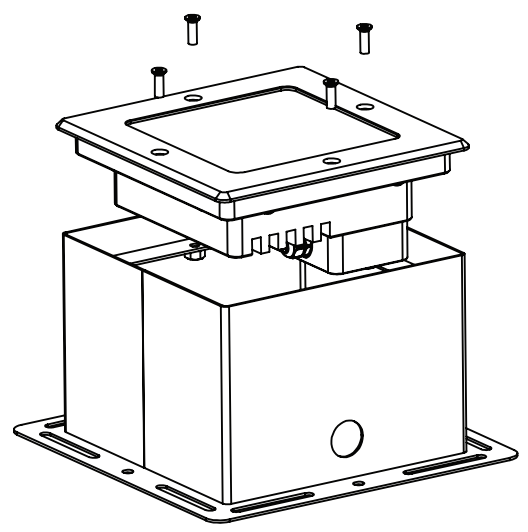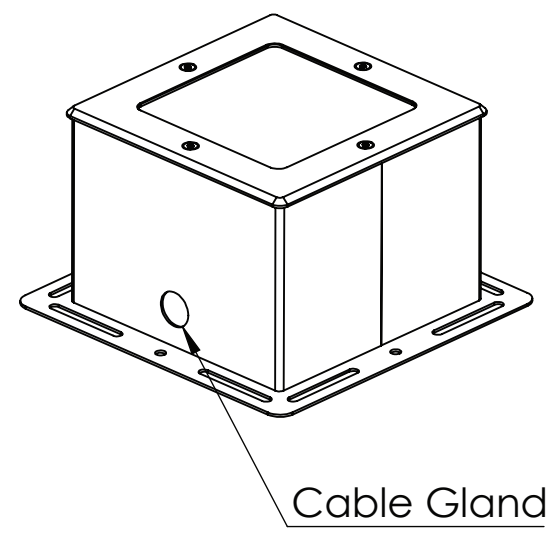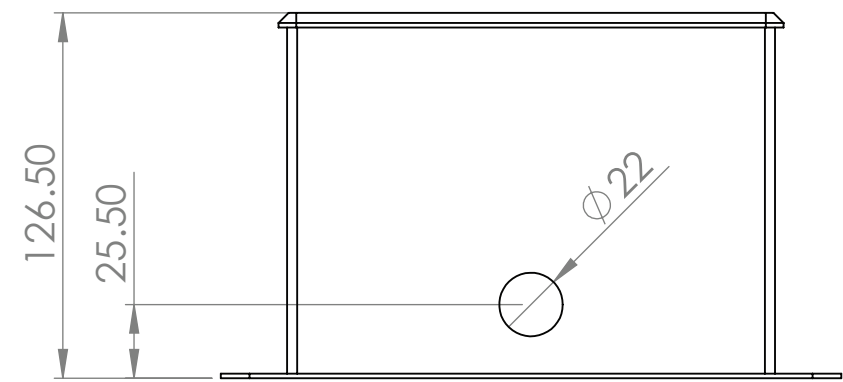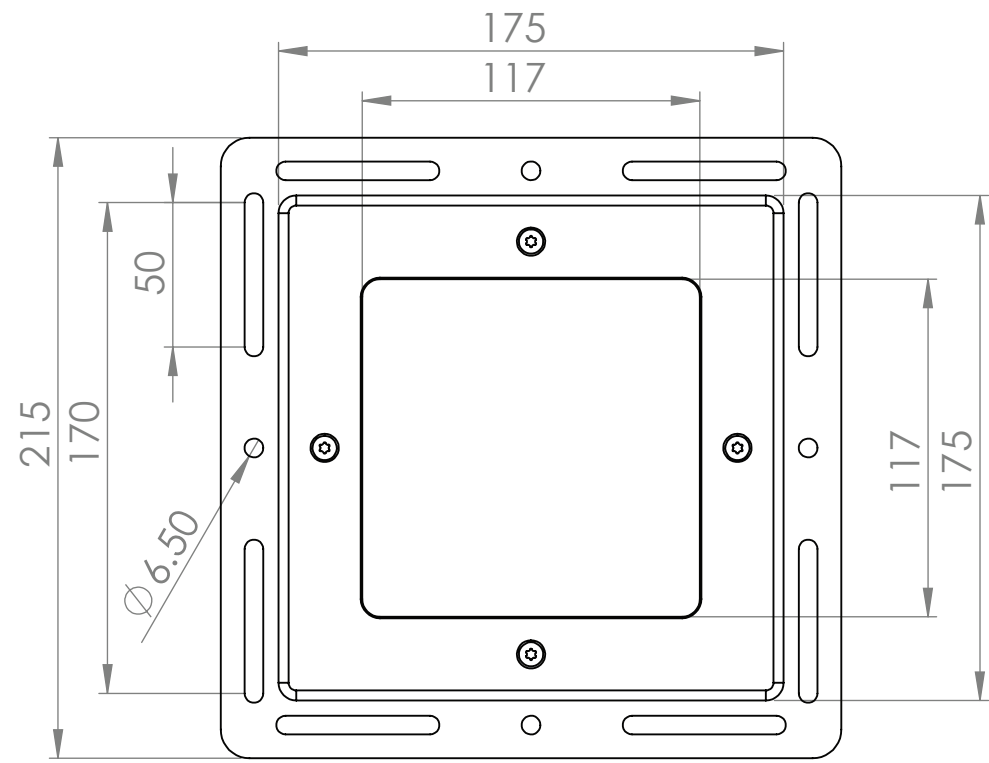


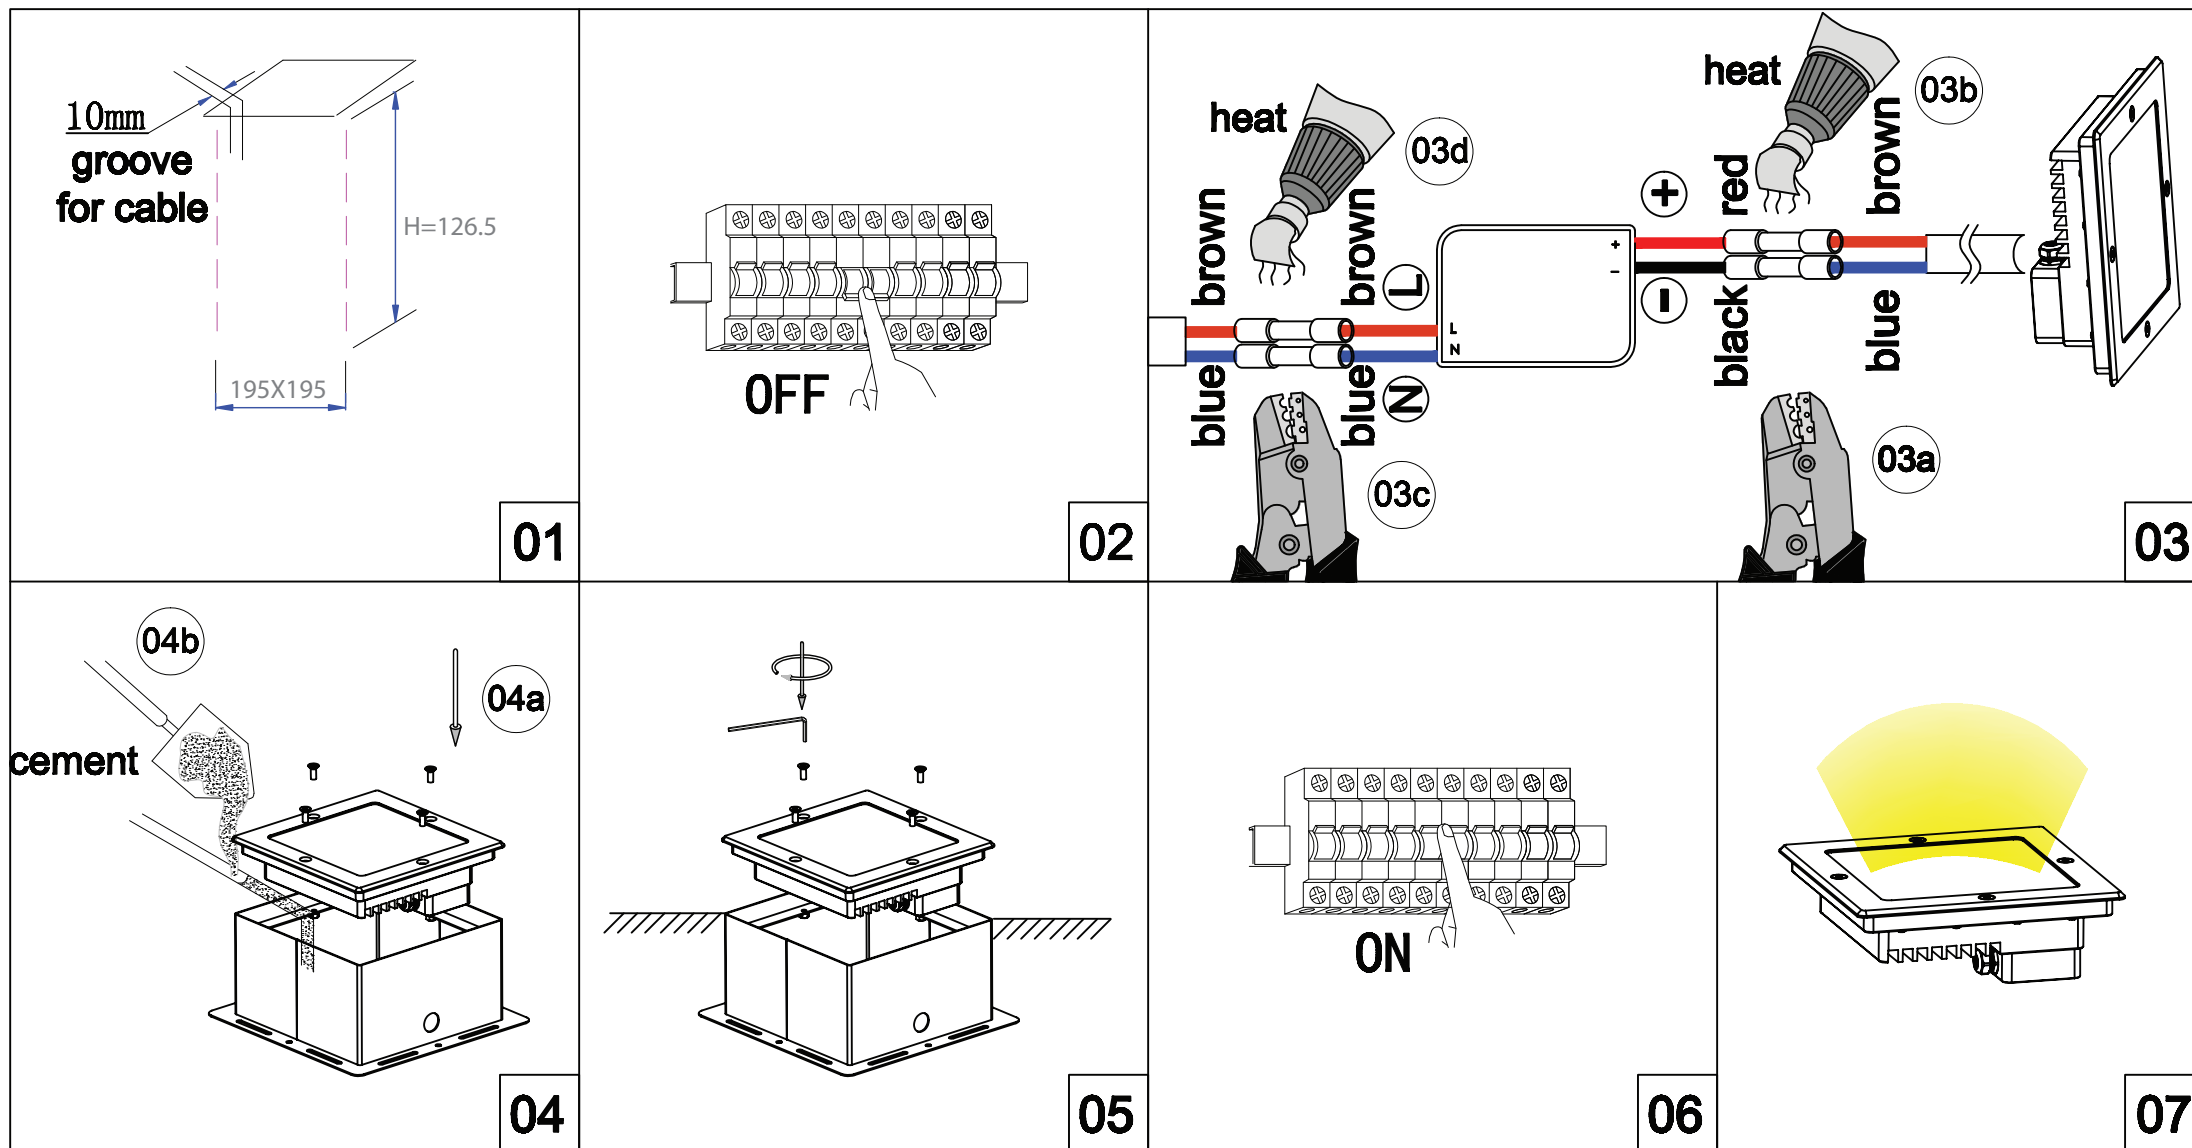


1

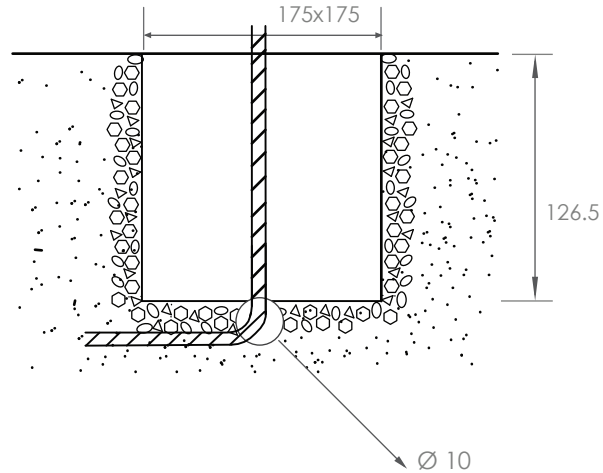


2

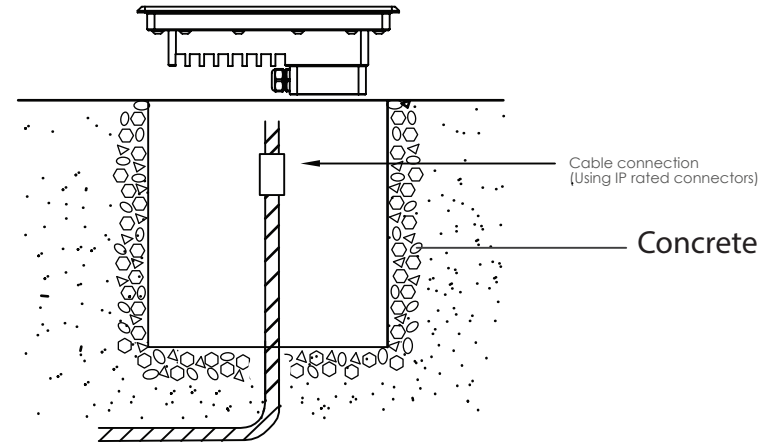


3


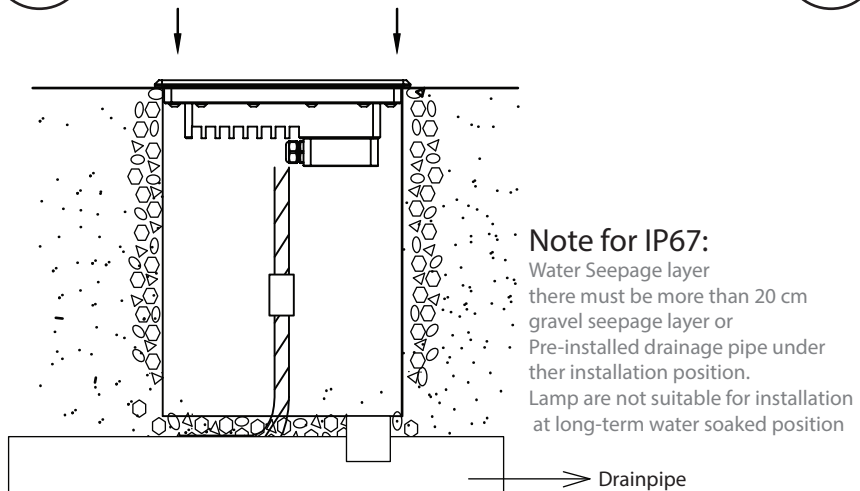



4

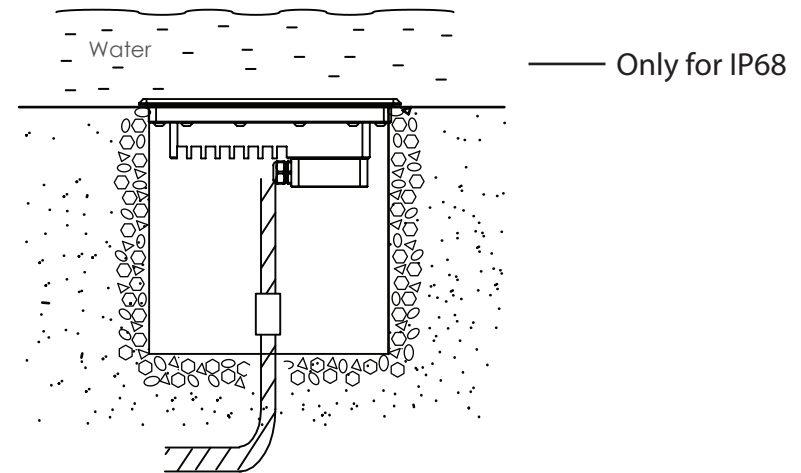


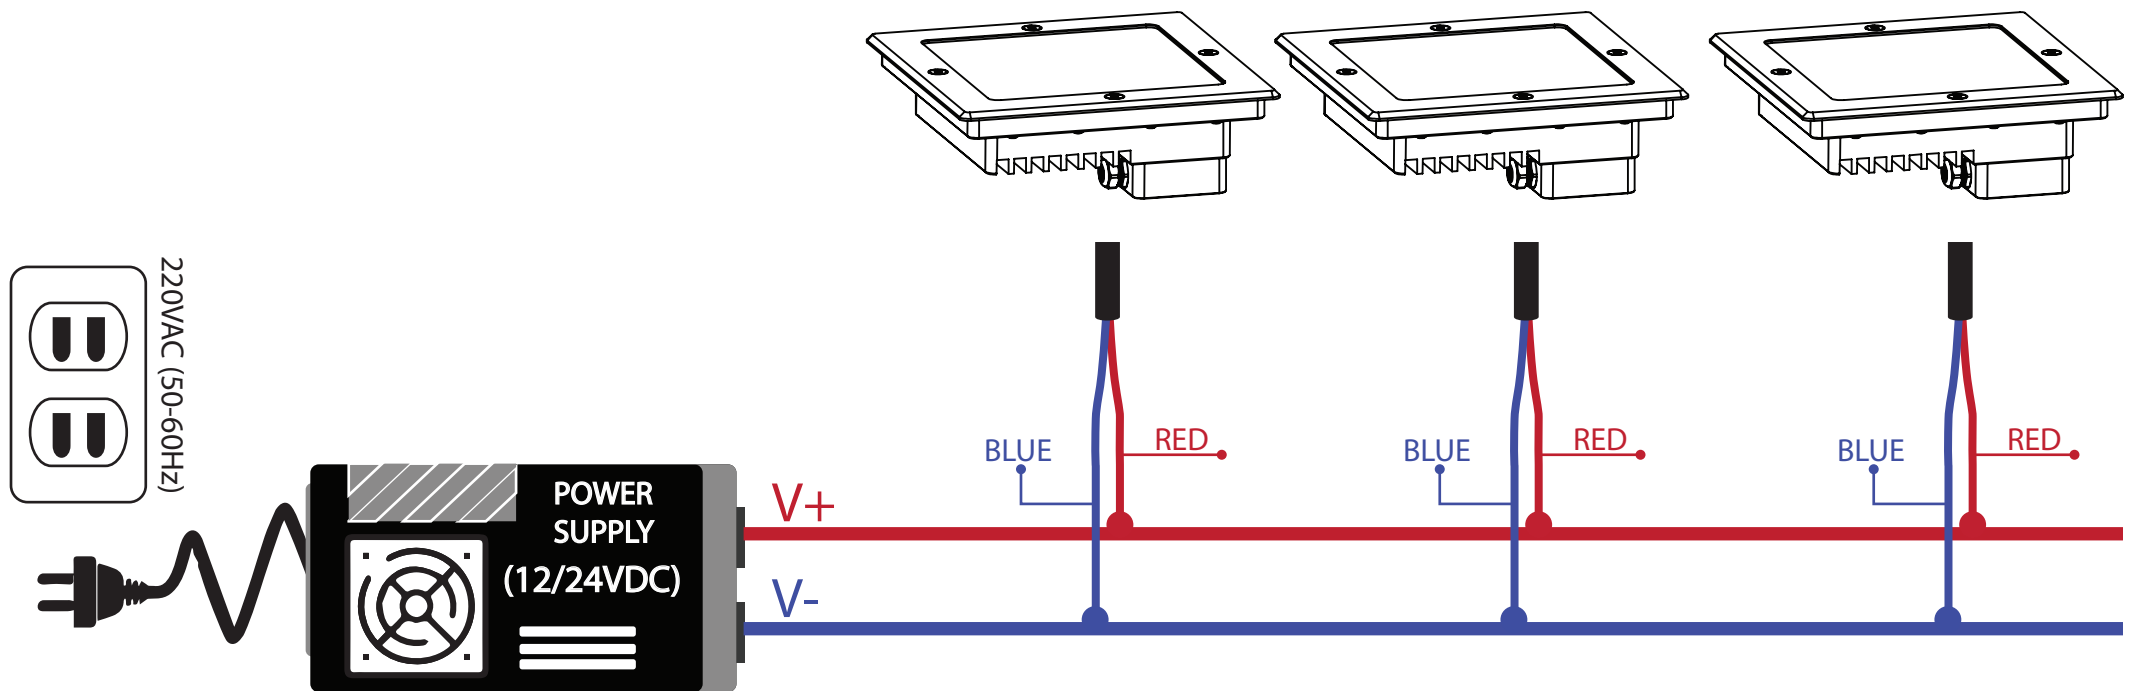

220VAC (50-60Hz)

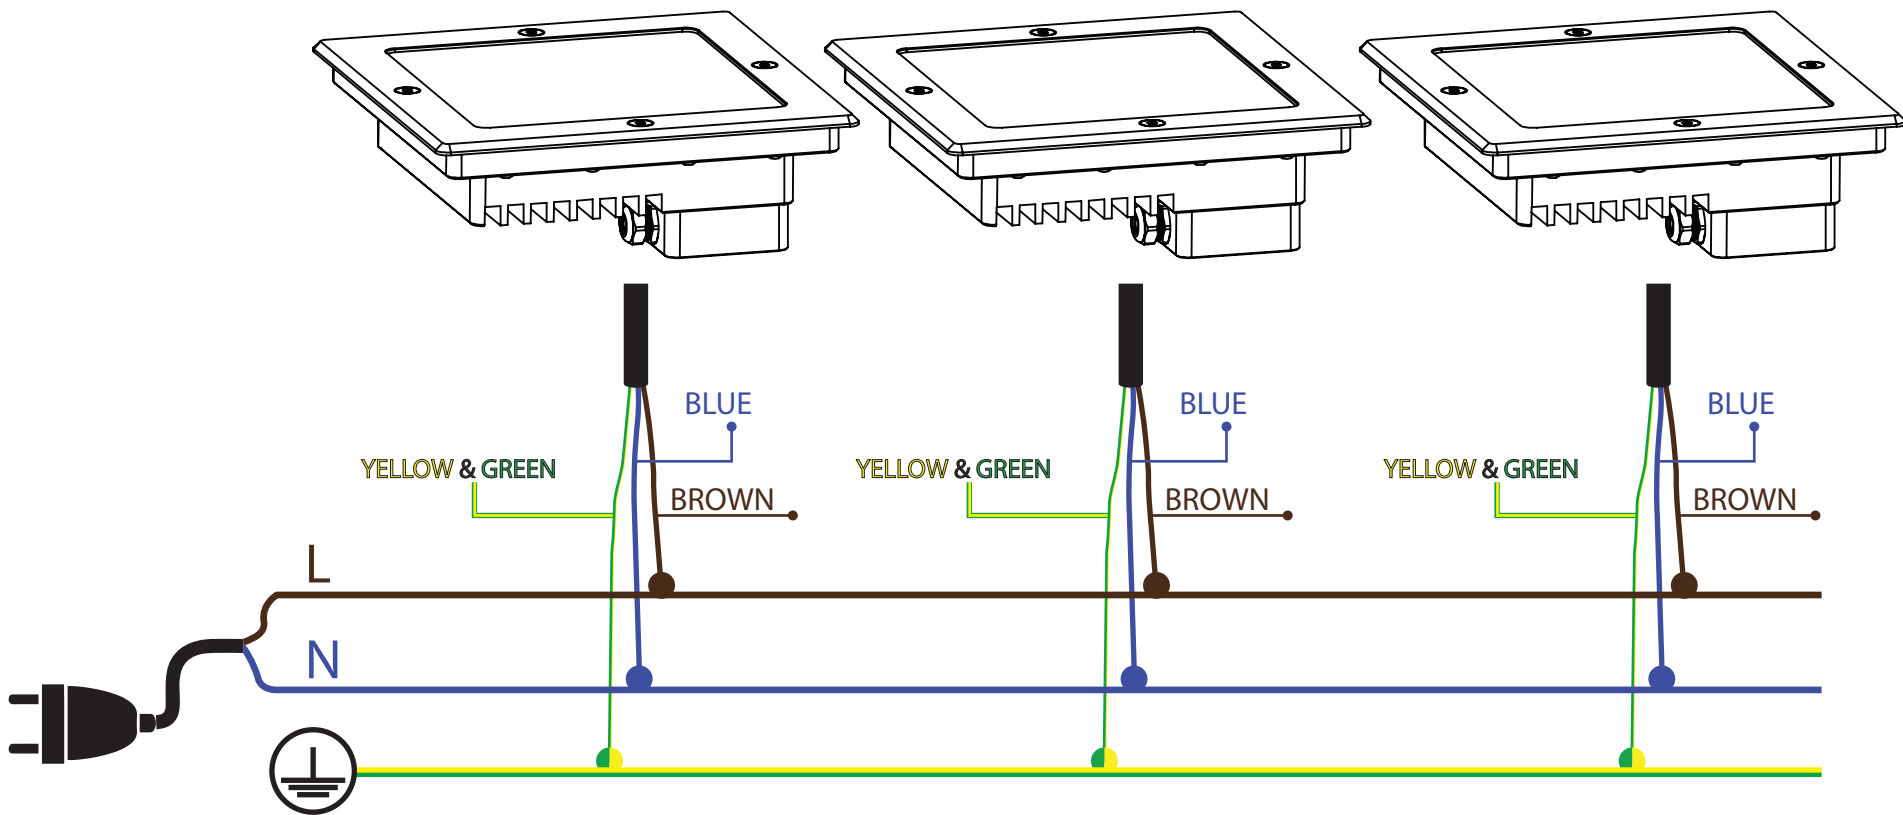

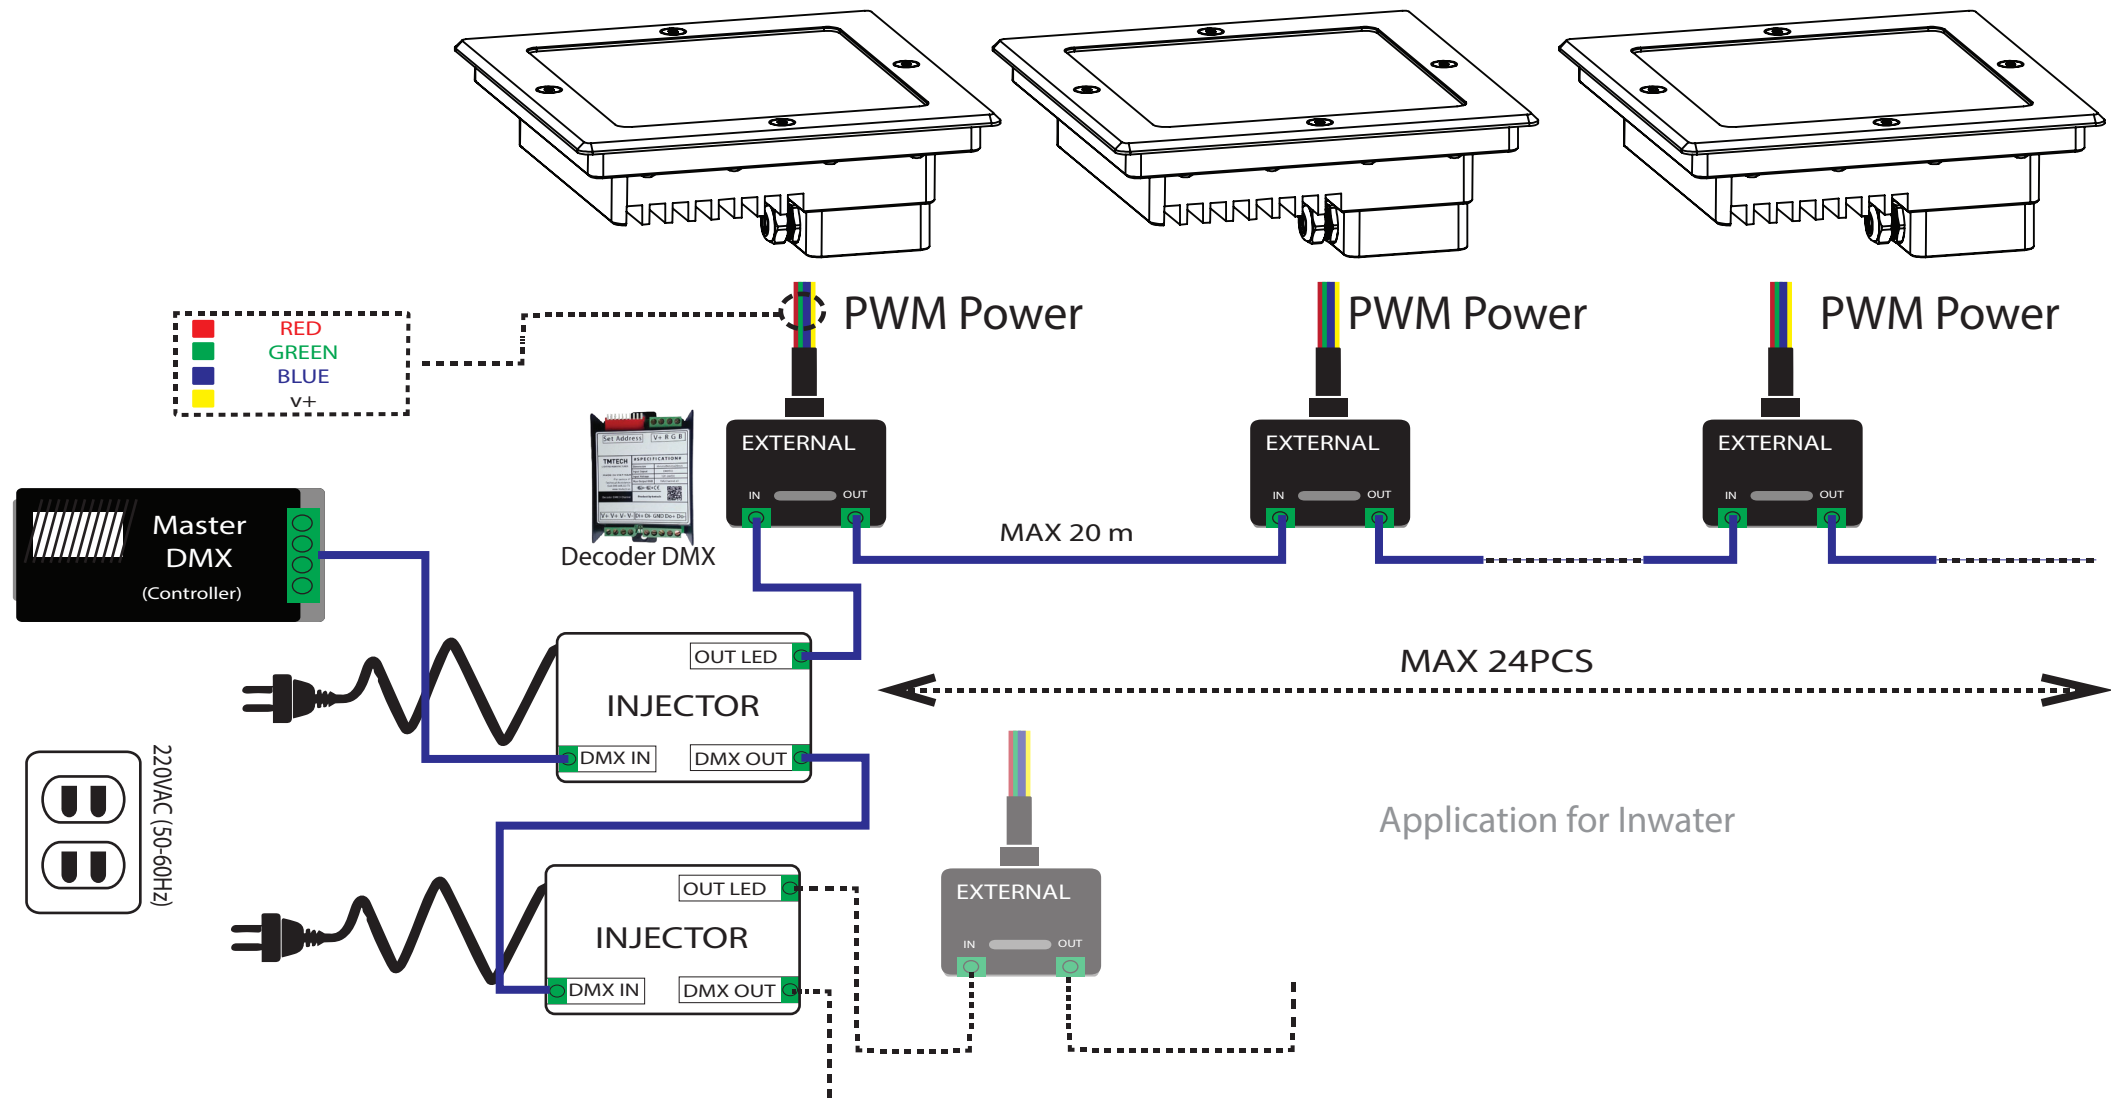

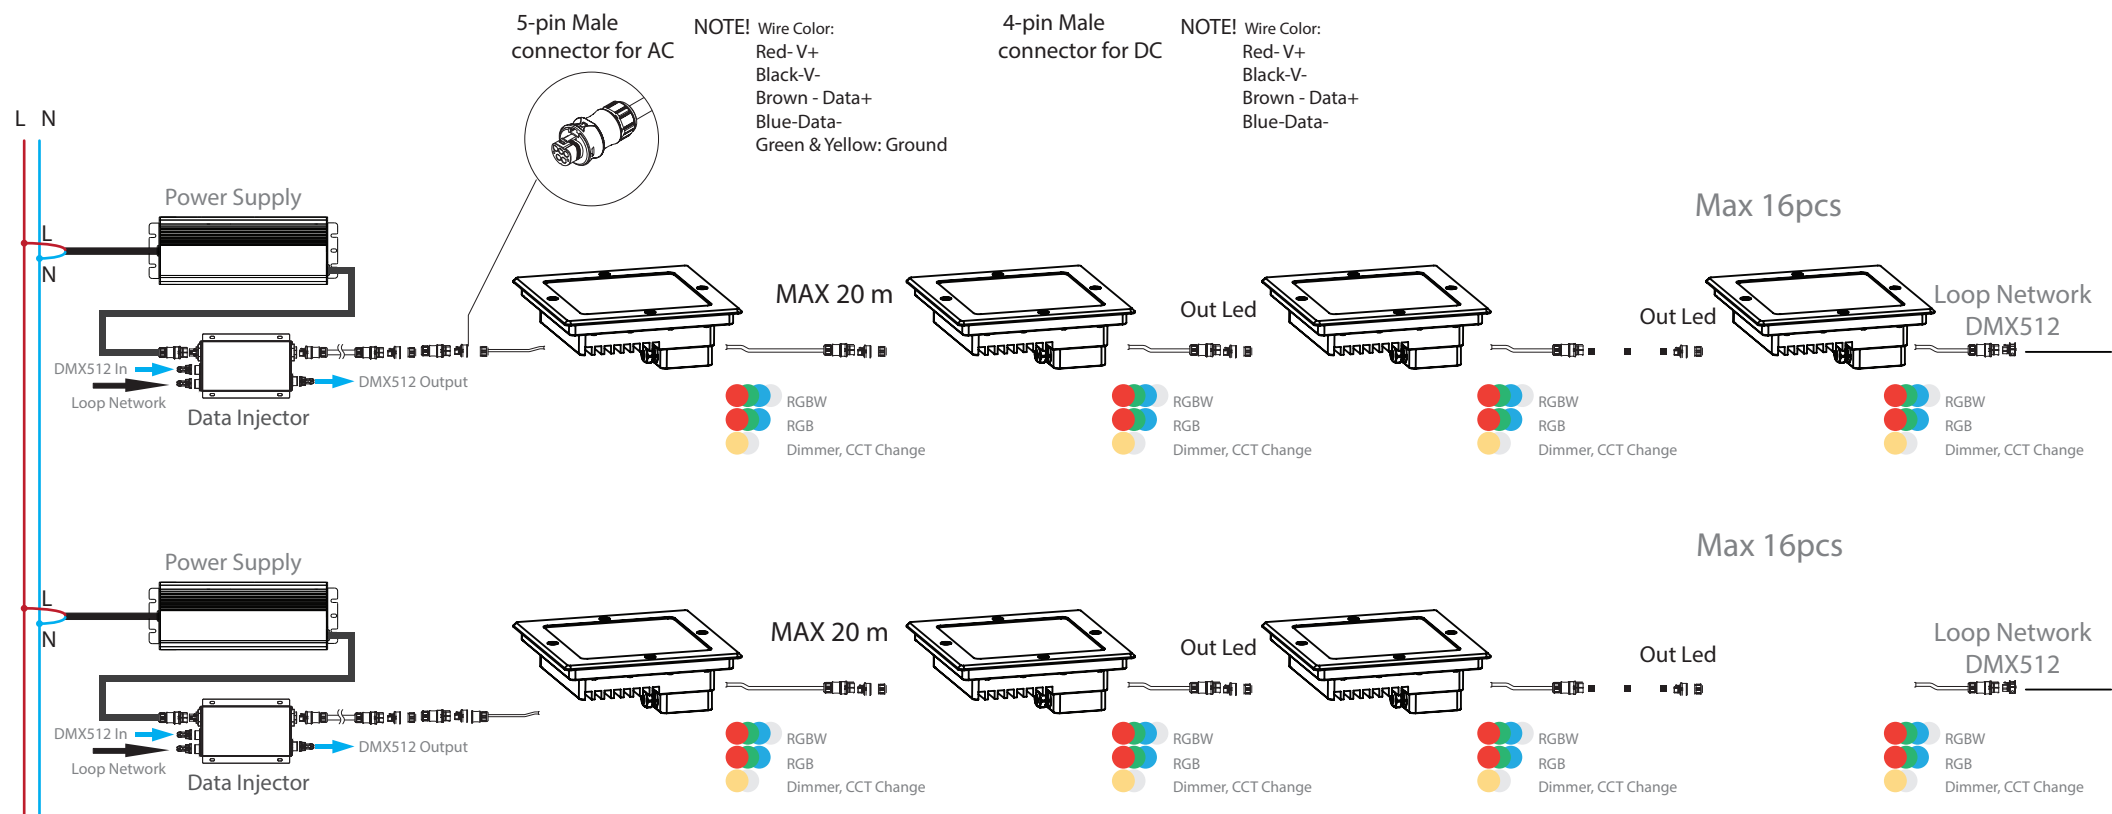

DMX512 with Auto Setting (iDMX512)
14bits resolution

