





**Korl-Series**  
Paver Driveway Lights



- Code Product: Korl-R/s
- Dimension: R (96x96x75mm) S (Ø88 X 75mm) -- Cutout: Ø88 110x110mm
- Input Voltage: 24-48VDC / 100-240VAC (43-60Hz)
- Power consumption: 3W/6W/9W
- Luminous Flux: 220Lm at 6W, 3000K
- Brand of LEDs: LED CREE
- Color: 3000K, CRI>80(Other color please contact us)
- Beam Angle: 30° (5°, 10°, 24°, 30°, 36°, 48°, 60°, 90°, Diffuser)
- Function Dimmer: Option (Dali, DMX512, 1-10V, Triac)
- Material: Model SA(Body: Aluminium), Model SI (Stainless 316)
- Finishing (Color housing):  
Model(R/S) A(Anodizing Topology), Model(R/S) I (Stainless)
- IP Class: 67
- Electrical Class: I
- IK Class: Body IK10, Maximum load capacity 1500 Kg at speed 5km/h

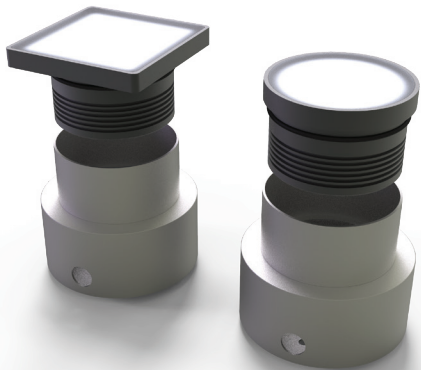

Model Body Aluminium

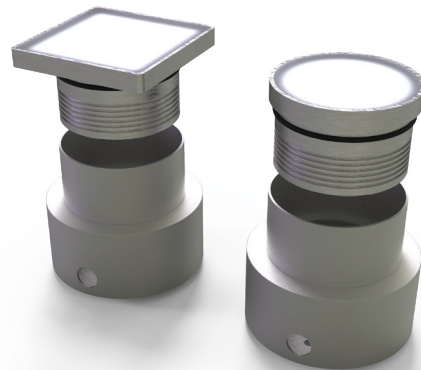


Model Body Stainless 316

- LED lifetime: 50.000hrs
- Lens:
 

|          |                                     |
|----------|-------------------------------------|
| Clear    | Material PMMA<br>with UV protection |
| Cellular |                                     |
| Sand     |                                     |
- Standards:
  - +EMC protection
  - +IEC 62031 LED modules for general lighting Safety specifications
  - +IEC 60598 Luminaires – Parts 1+2: General requirements particular requirements and tests












IP67

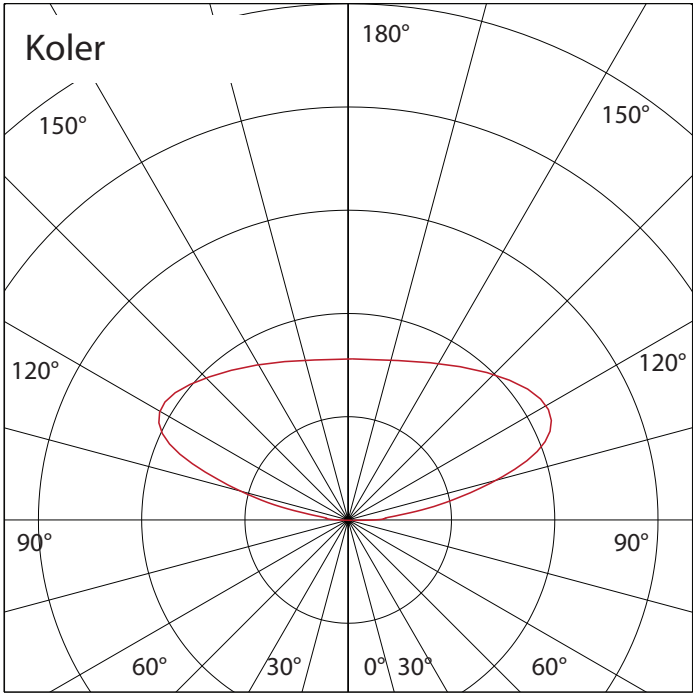


220Lm at 6W, 3000K


| Product Description   |                                                                                     |
|-----------------------|-------------------------------------------------------------------------------------|
| Control Gear          | Fairchild Technology                                                                |
| LED Module            | High-power LEDs on metal-core PCB.<br>Collimating lens made of optical polymer/pmma |
| Anti-Glare            | Option                                                                              |
| Electrical Protection | EMC, inrush current                                                                 |
| Electrical Class      | 3                                                                                   |

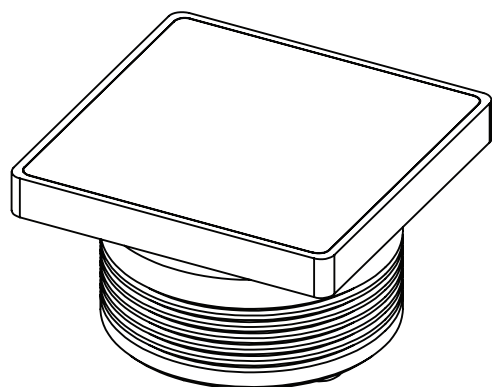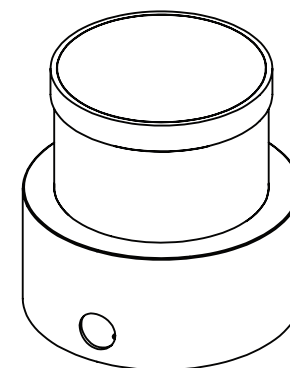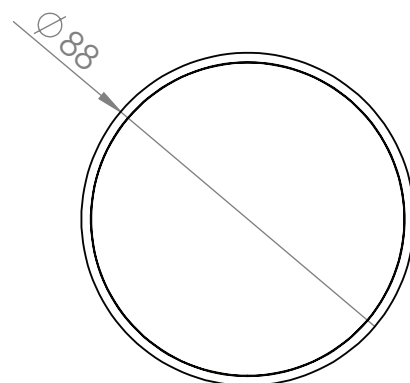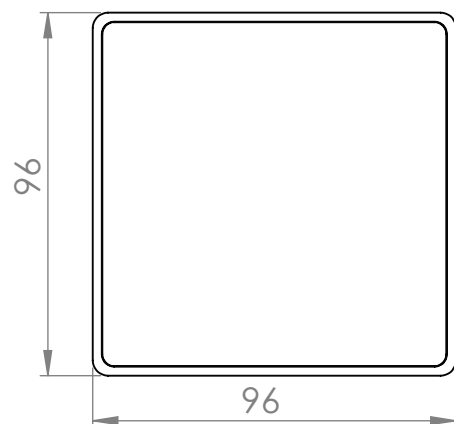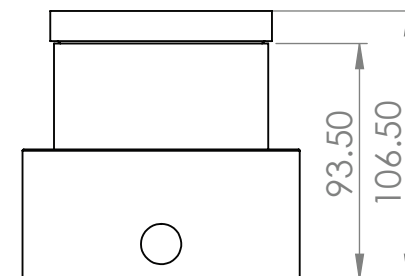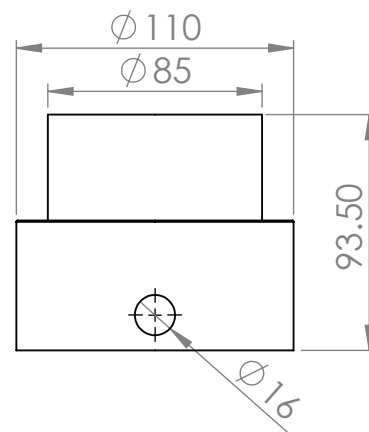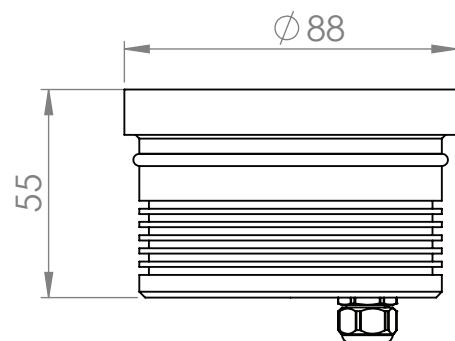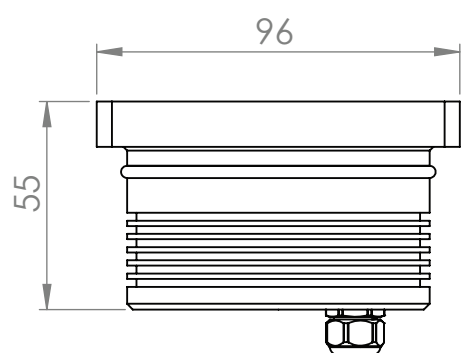

Seires S

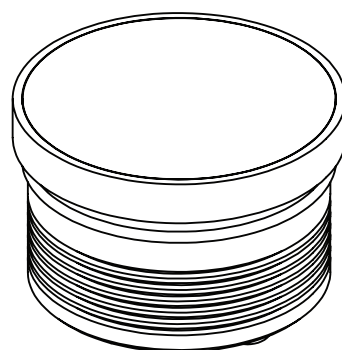

Seires R





Recessed Box  
SS304





All dimension in mm



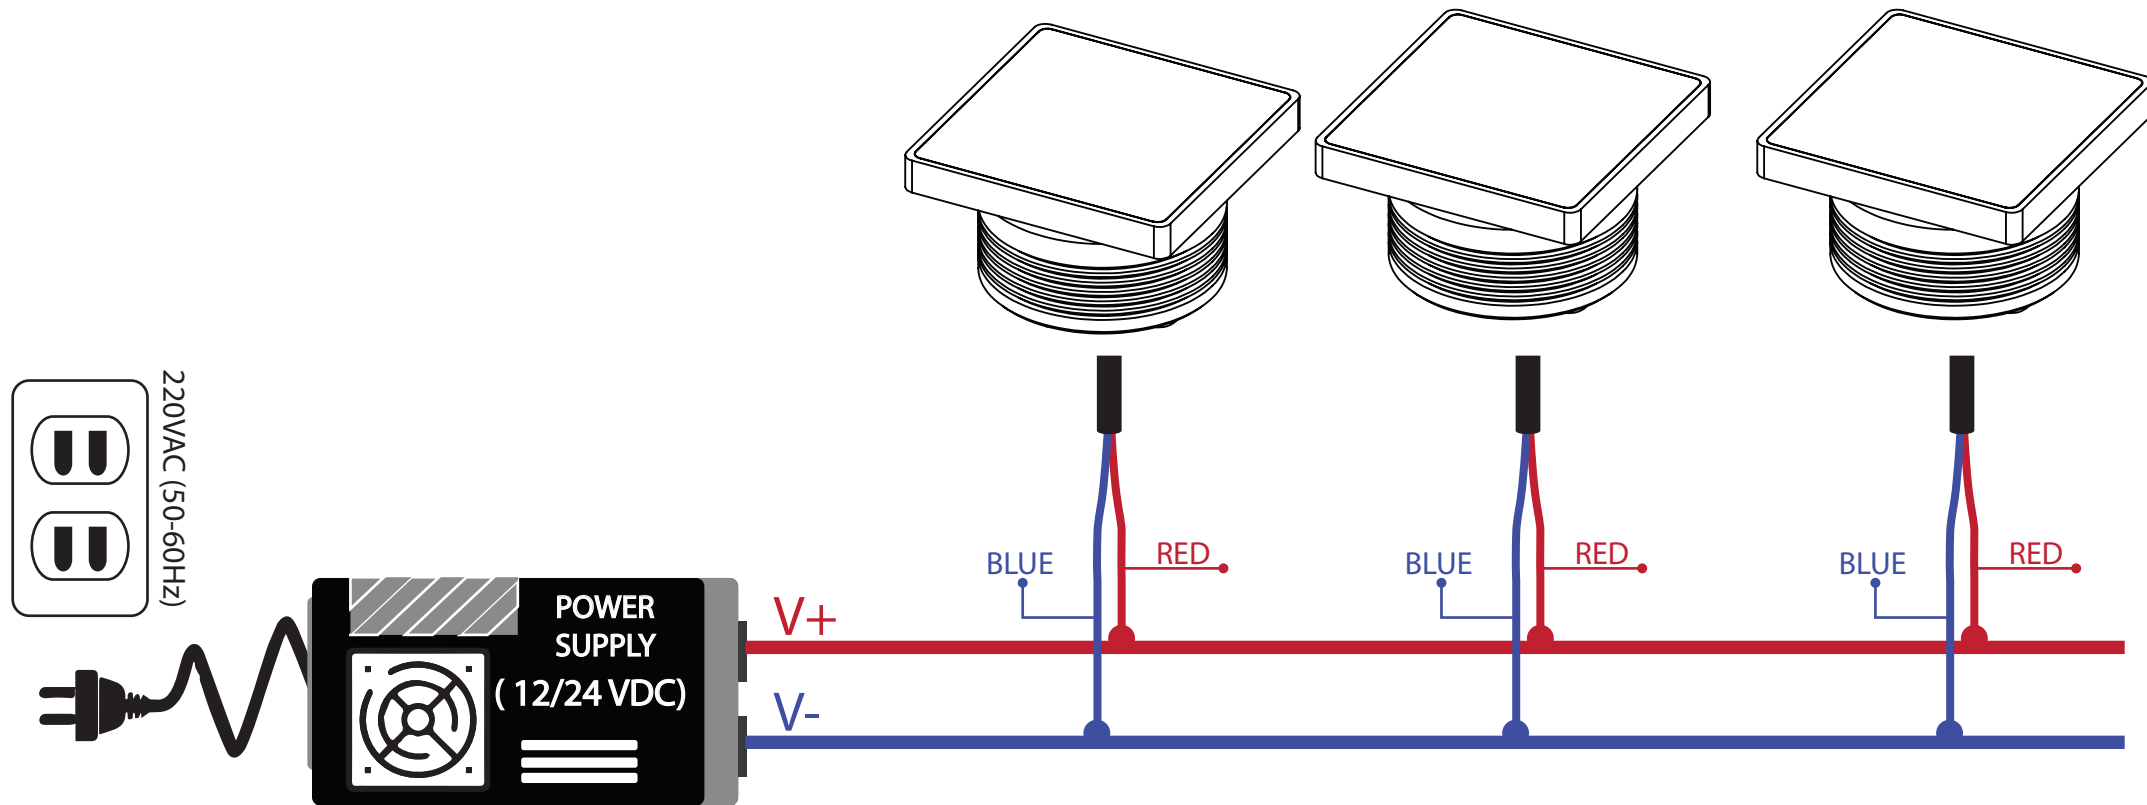

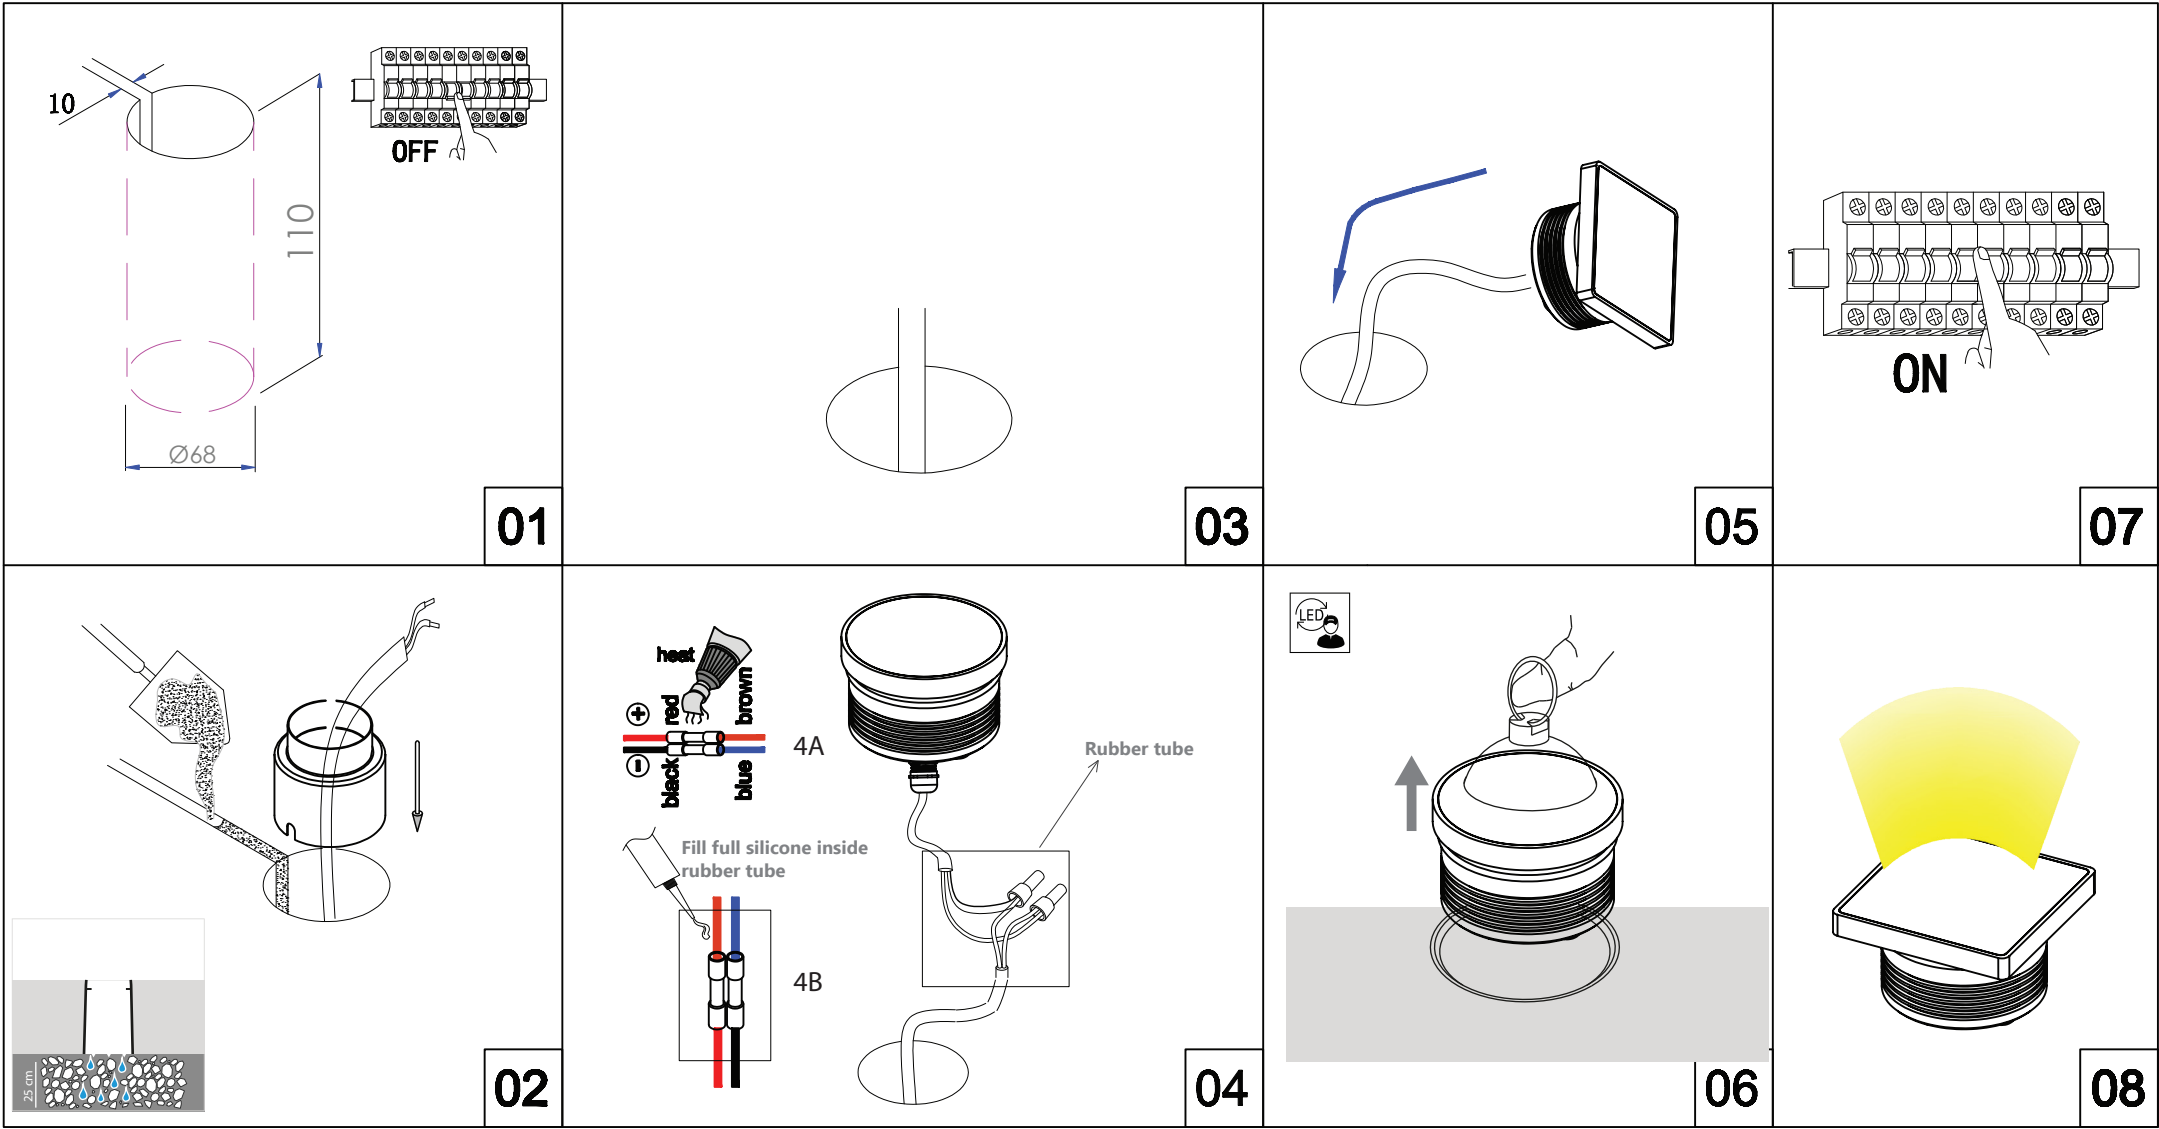


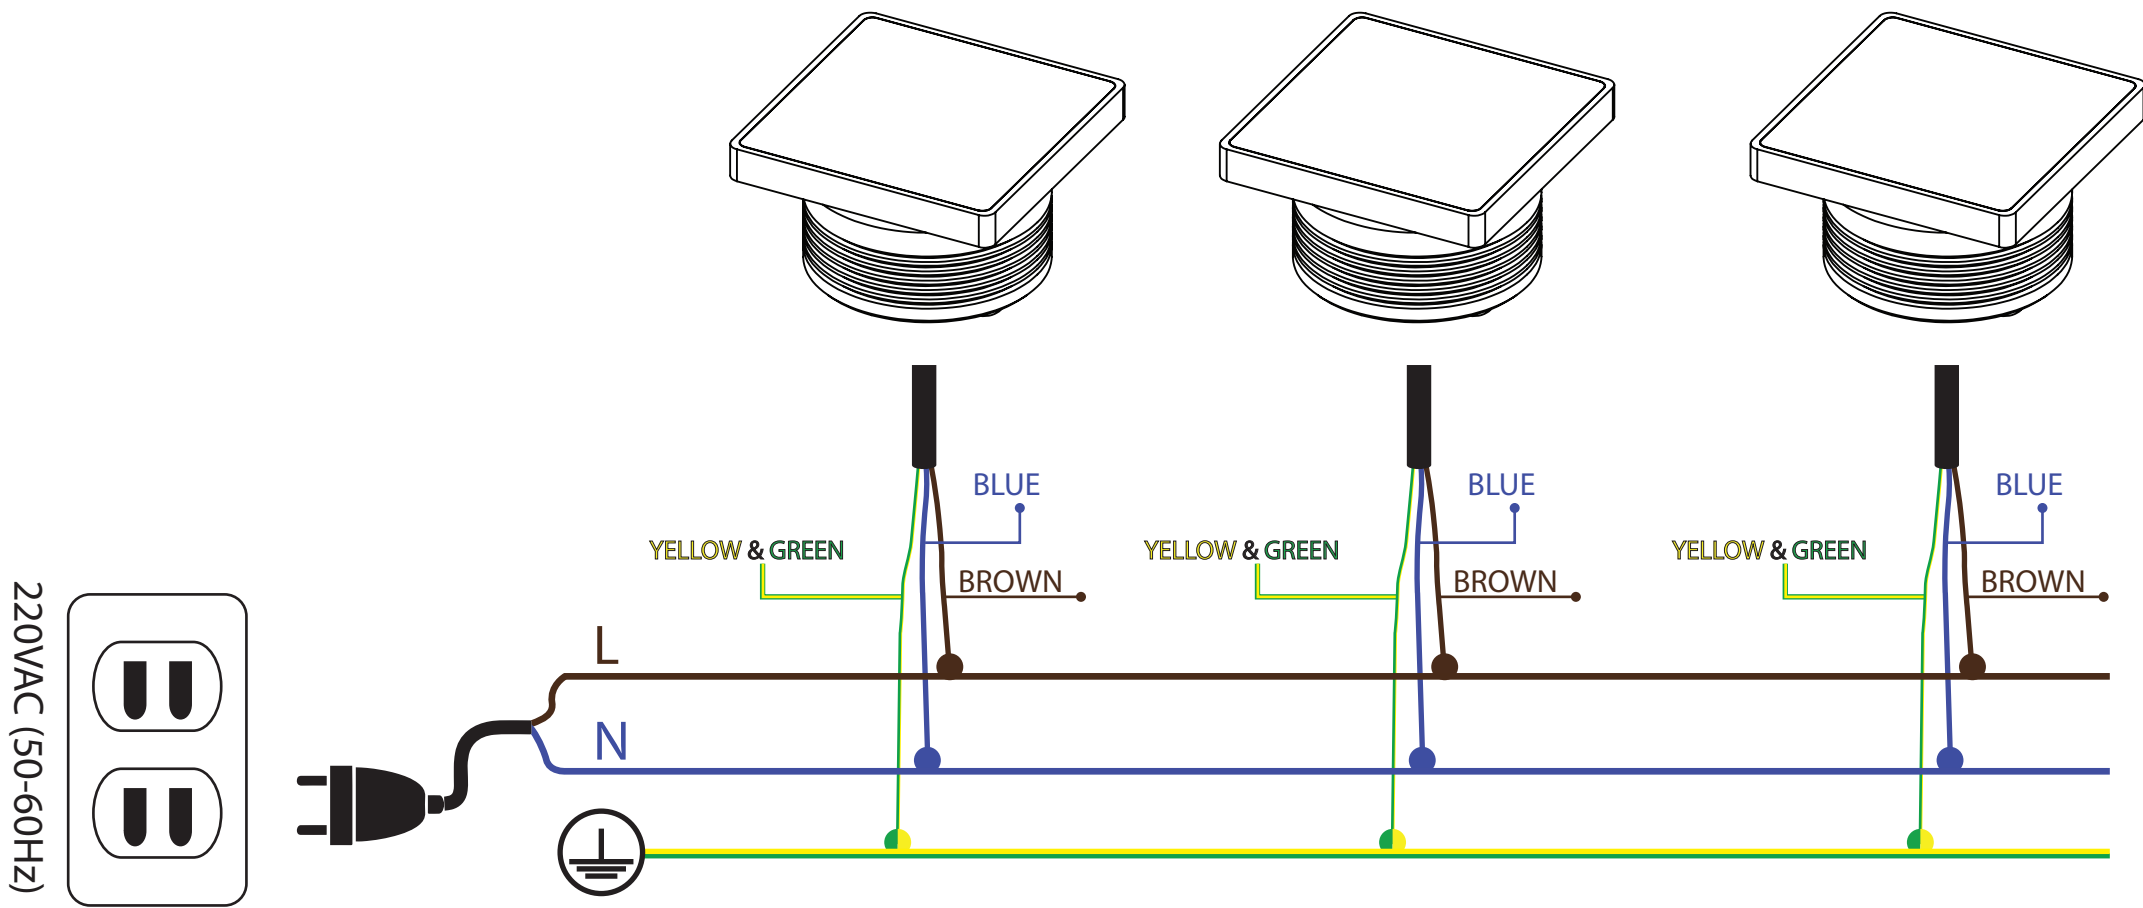


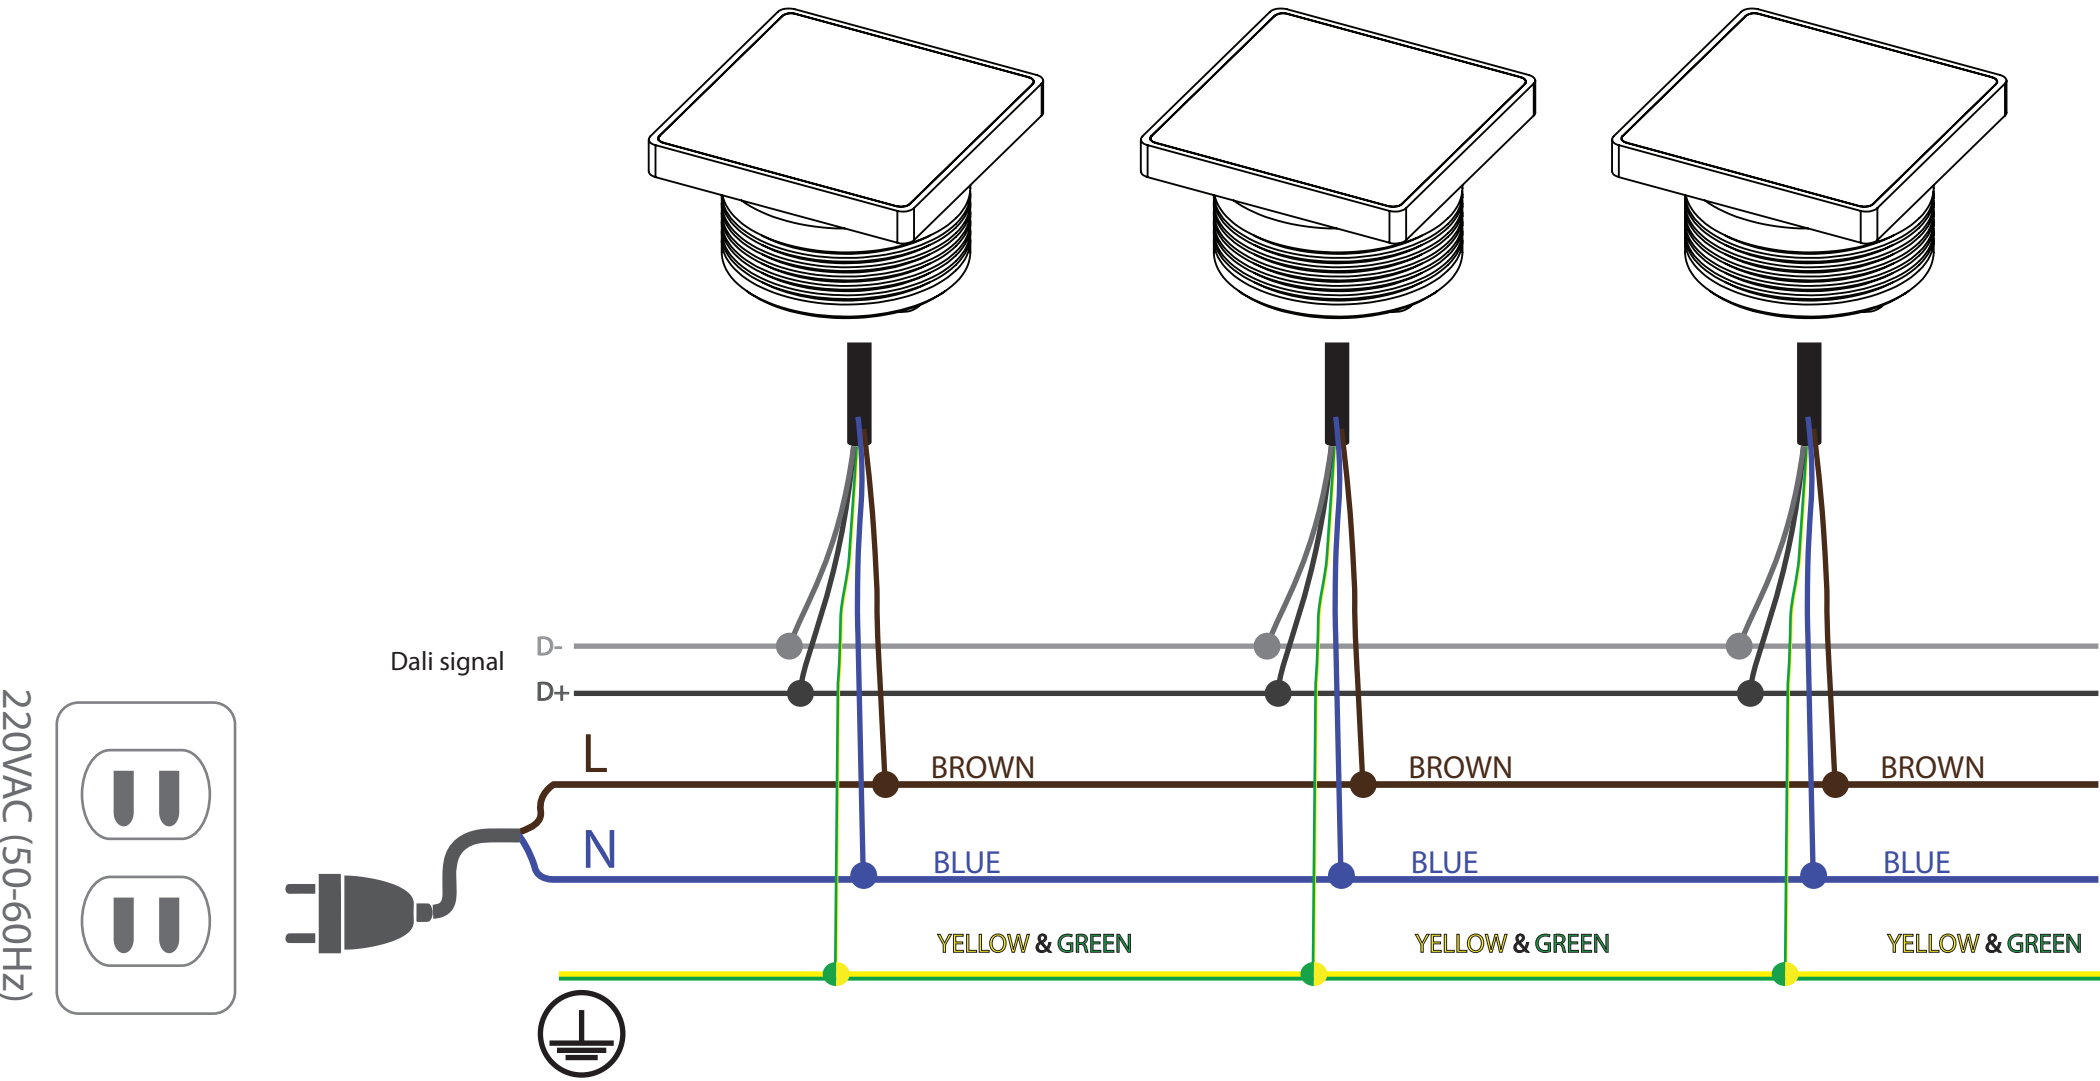

220VAC (50-60Hz)





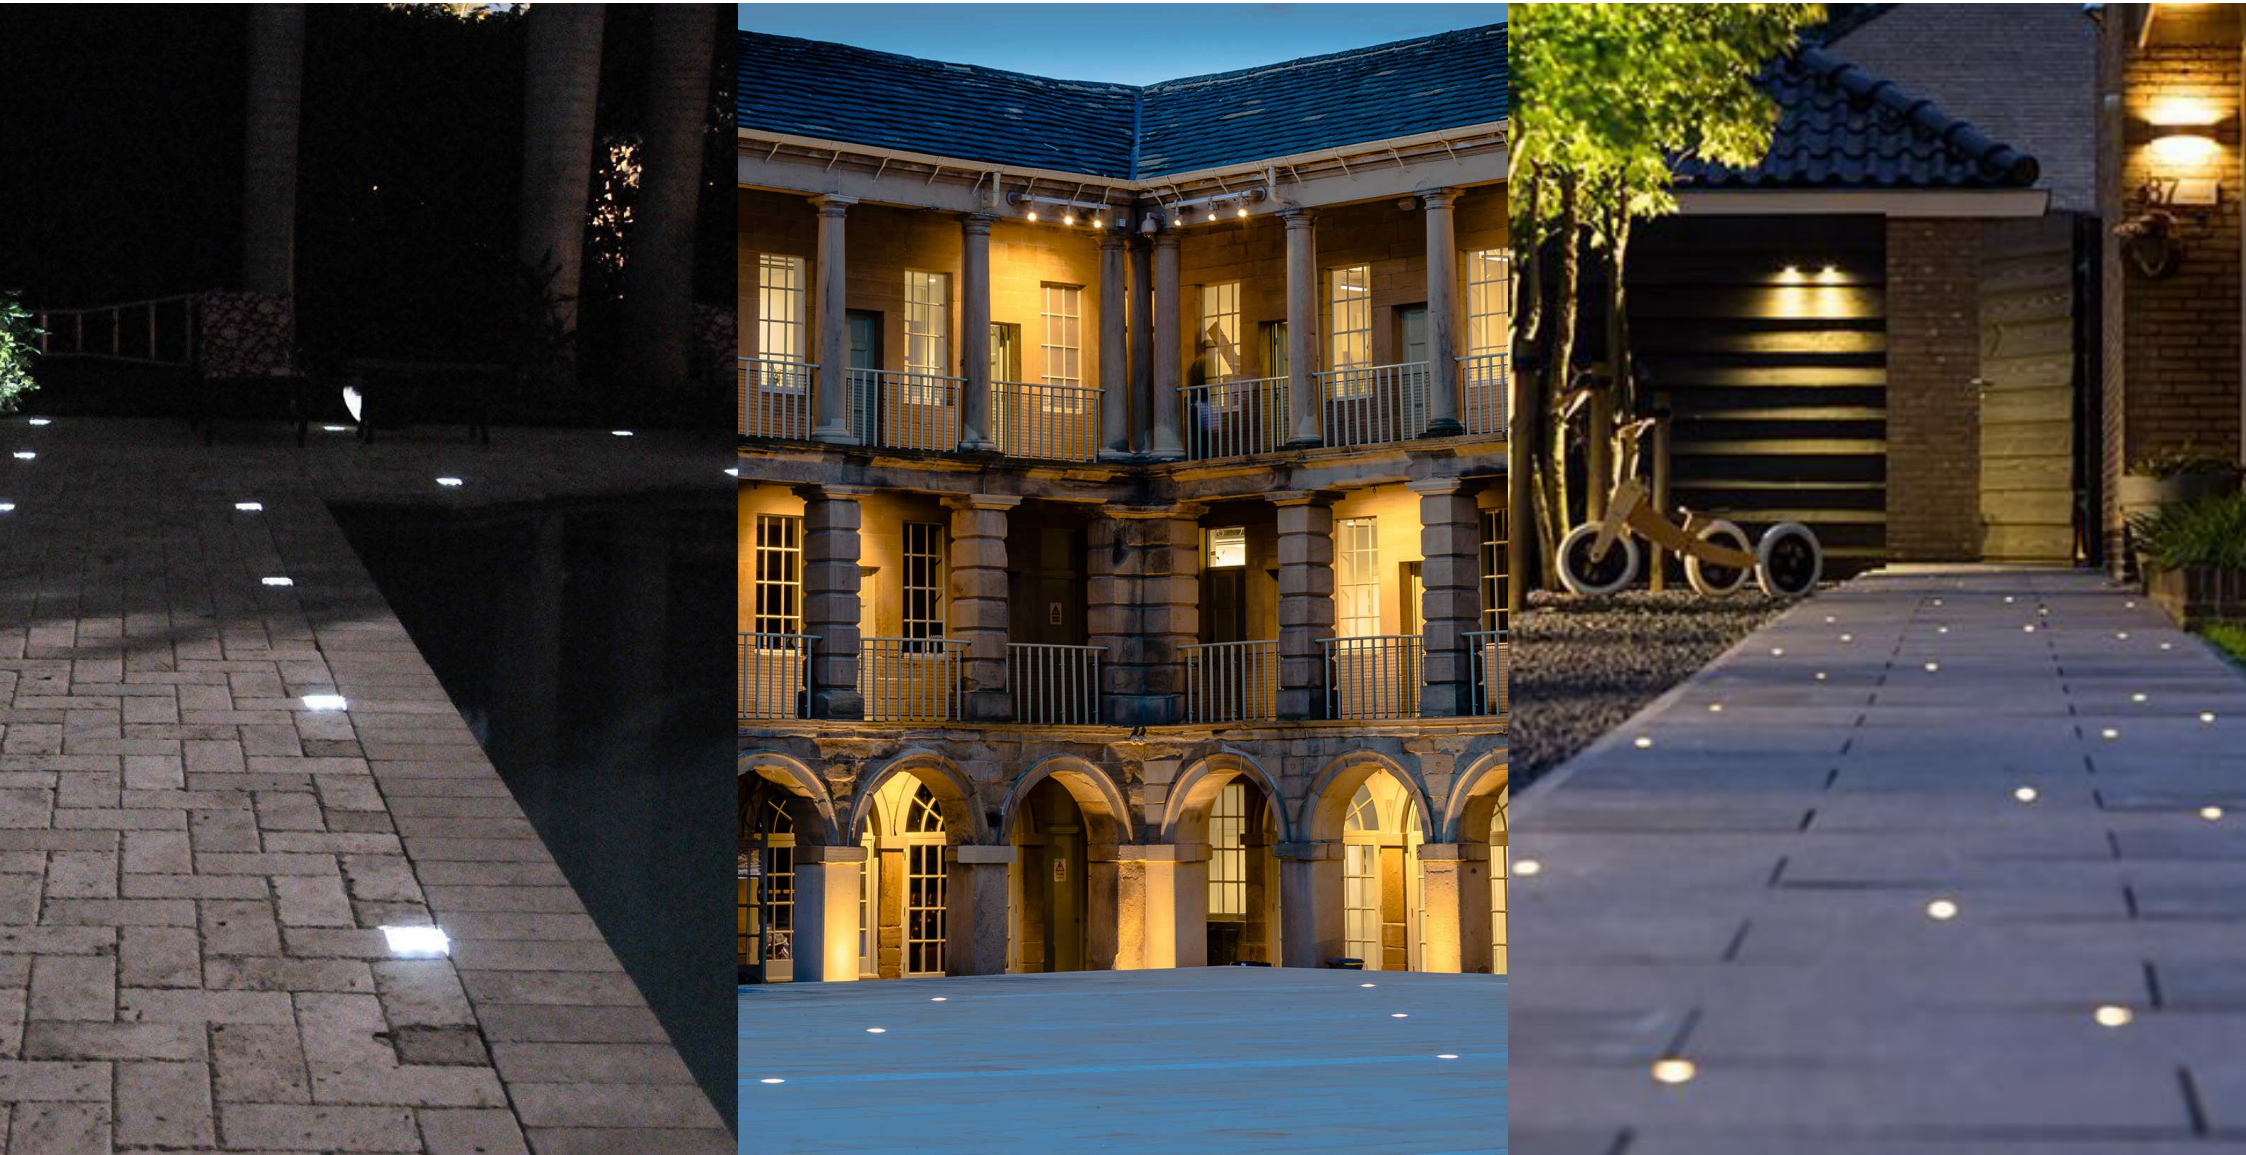

Paver lights

