



Faki-M Adjustable Uplighter
Inground Light




- Code Product: Faki-Series M
- Dimension: Ø99 x 78mm, Cutout: Ø95 x 120mm
- Input Voltage: 24VDC
- Power consumption: 5-9W
- Luminous Flux: 720Lm at 3000K, 60°, 9W
- Brand of LEDs: LED CREE
- Color: 3000K (Orther color: 2700 - 6000K, RGBW)
- Beam Angle: 36° (10°, 24°, 36°, 45°, 60°) with Twin +/-20°
- Function Dimmer: PWM on Power
- Material: IP67-Body: Aluminium Anode ; Face: Stainless 316
- Finishing (Color housing): Stainless
- Class: III

- LED lifetime: 50.000hrs
- Lens: Clear Cellular Sand | Material PMMA with UV protection
- Standards:
 - +EMC protection
 - +IEC 62031 LED modules for general lighting Safety specifications
 - +IEC 60598 Luminaires – Parts 1+2: General requirements particular requirements and tests




IP67

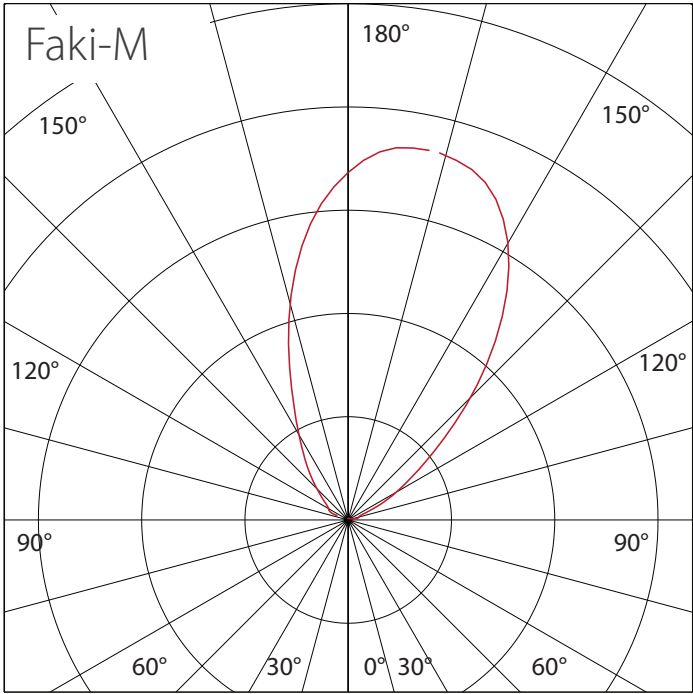Pending




720Lm at 3000K, 60°, 9W


Product Description	
Control Gear	Fairchild Technology
LED Module	High-power LEDs on metal-core PCB. Collimating lens made of optical polymer/pmma
Anti-Glare	Option
Electrical Protection	EMC, inrush current
Electrical Class	3

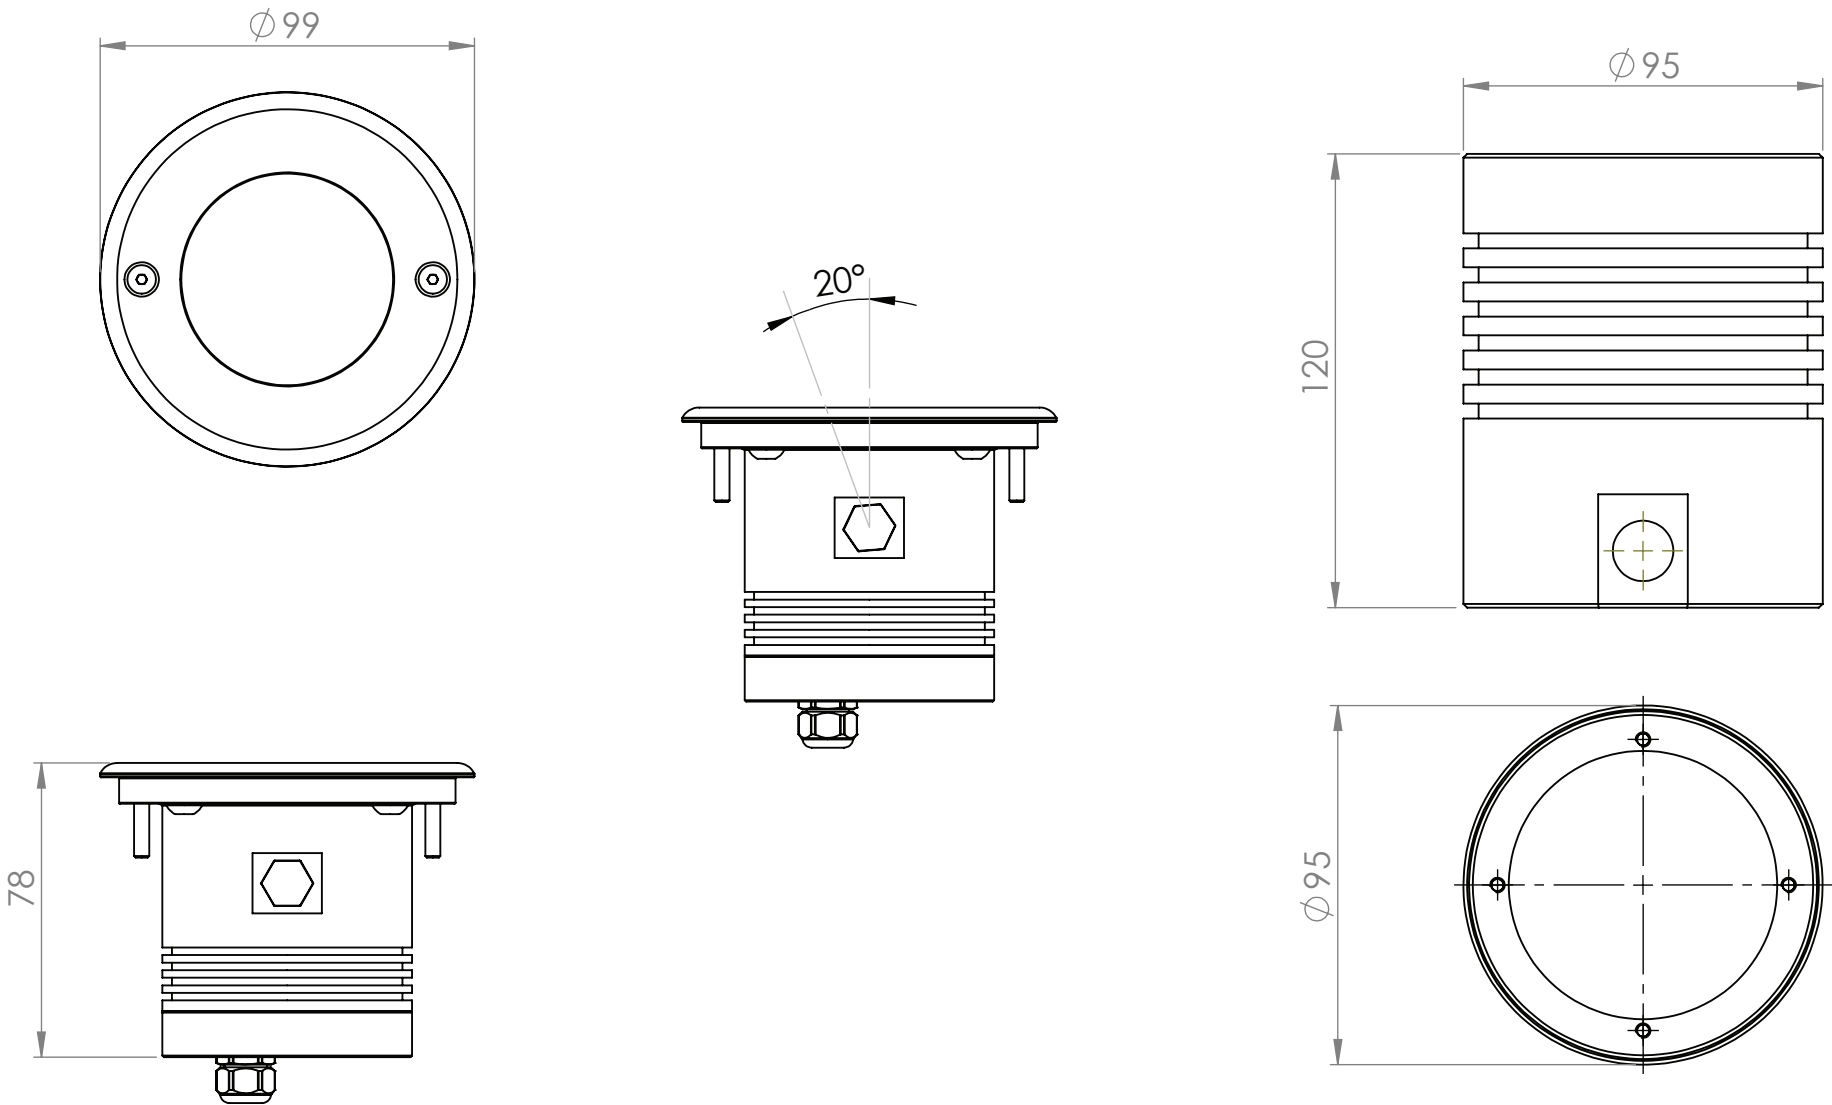


1

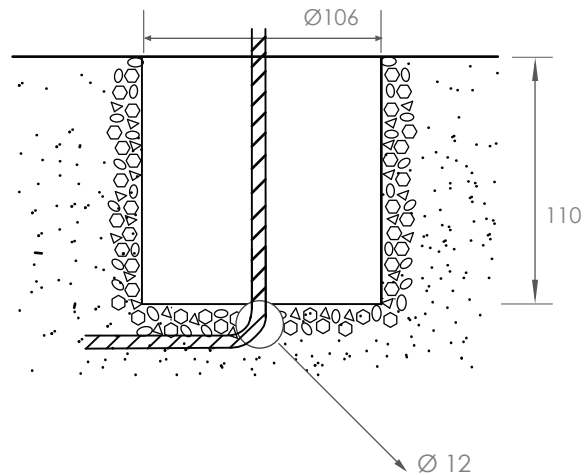


2







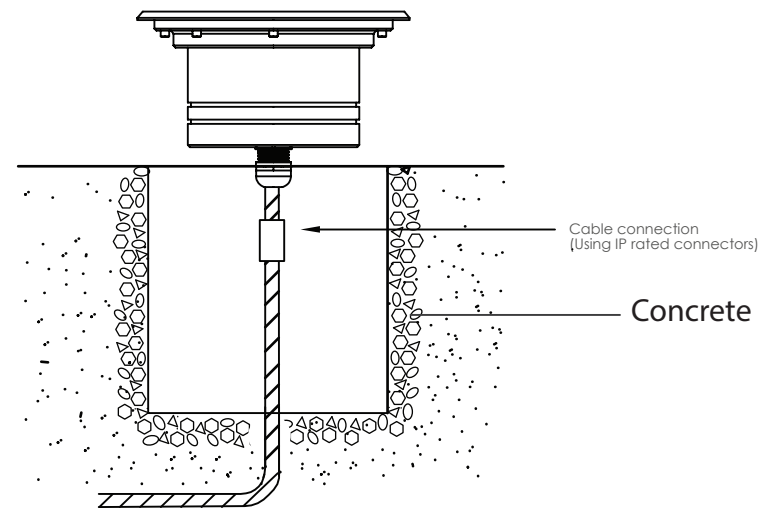


3

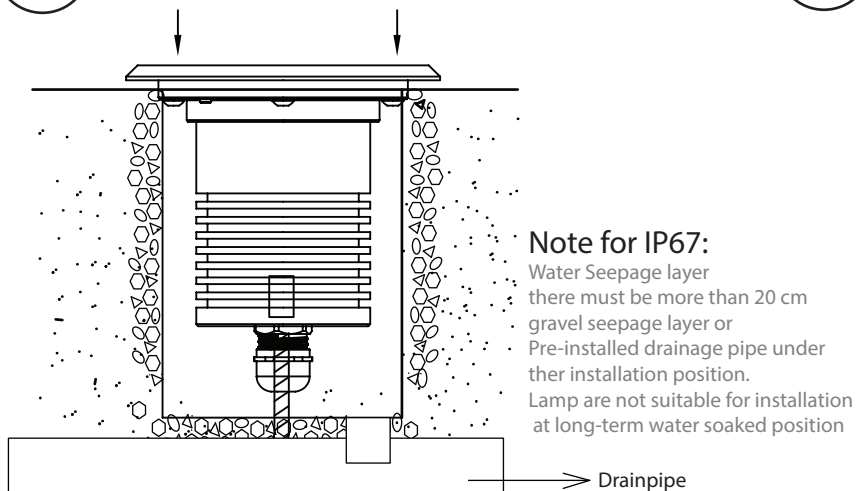

4

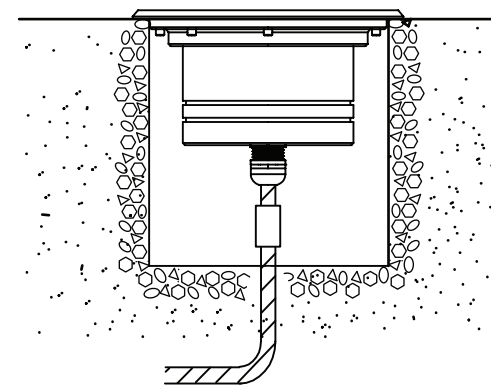

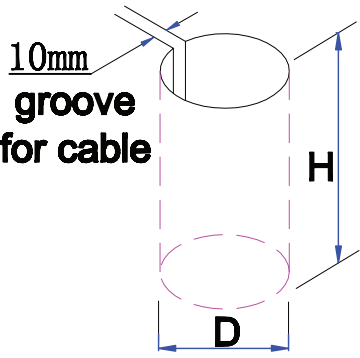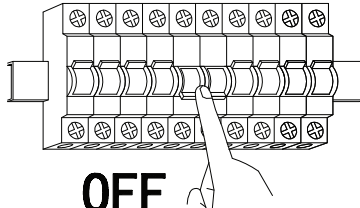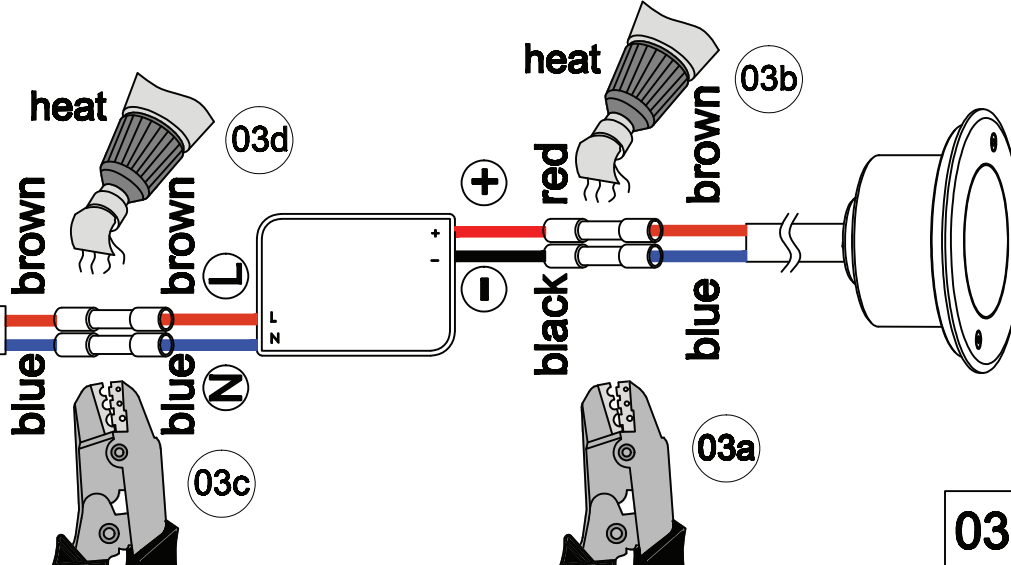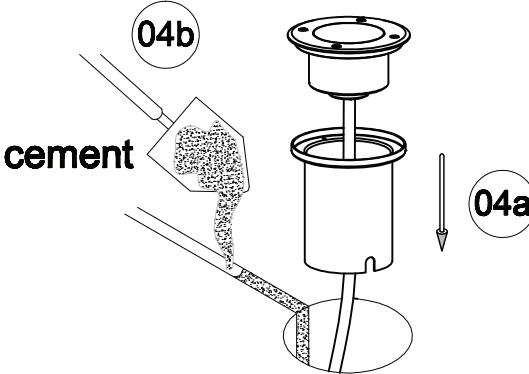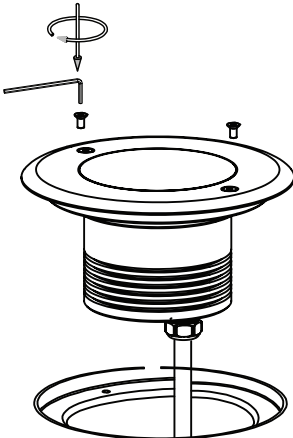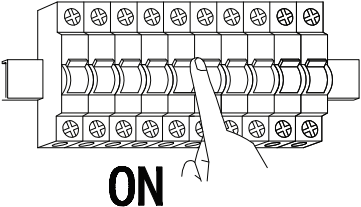 10mm groove for cable H D 01	 OFF 02	 heat 03d heat 03b + red 03a black blue 03c - L N 03	
 04b cement 04a 04	 05	 ON 06	 07

