



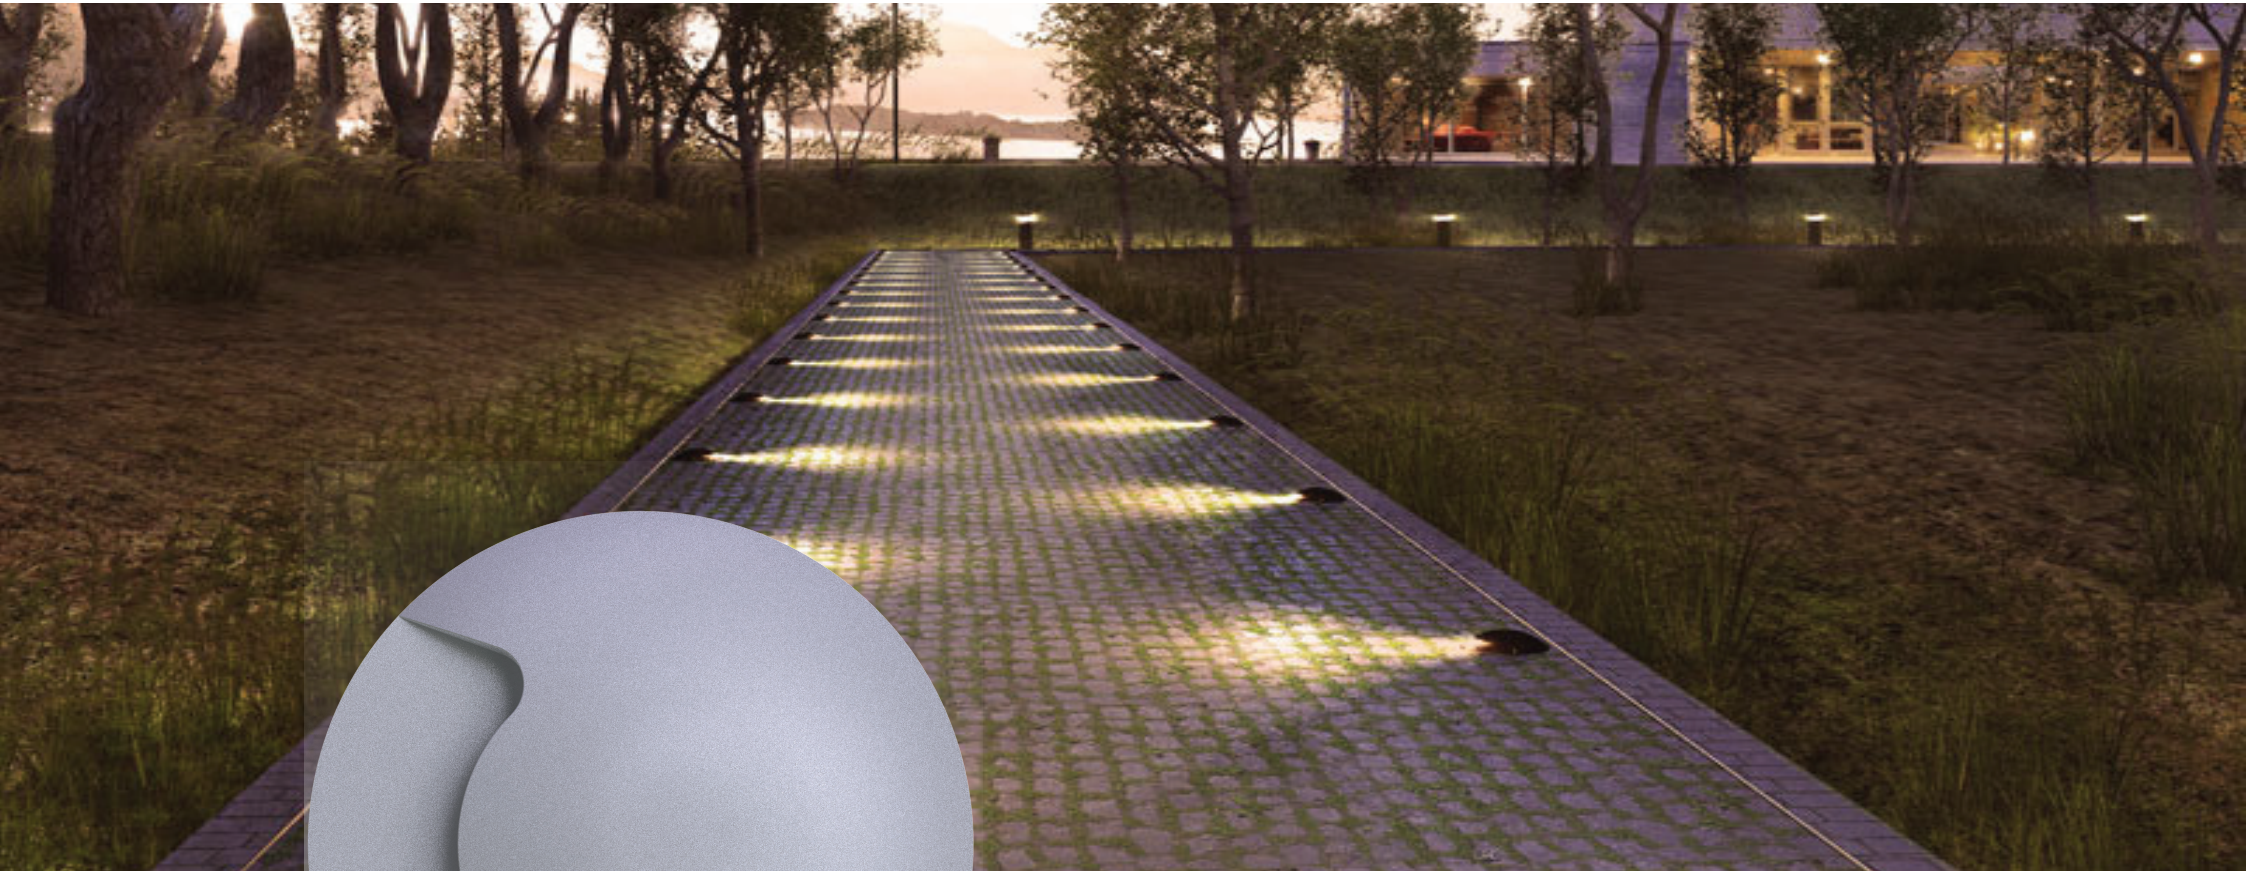

Han-Series

Paver Lighting

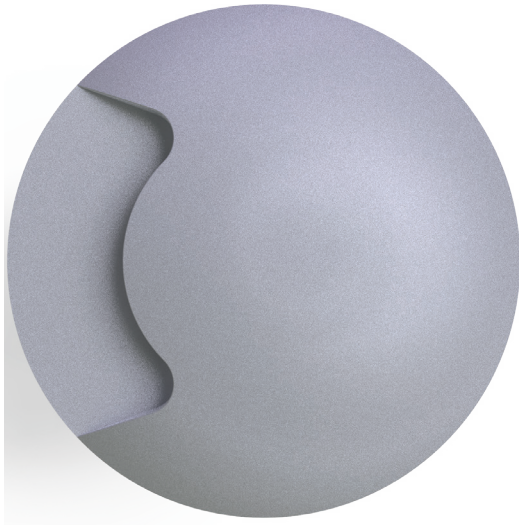

- Code Product: Han-Series
- Dimension: Ø51mm x 65mm
- Input Voltage: 12/24VDC
- Power consumption: Max 3W
- Luminous Flux: Series (1Door, 2Doors, 3 Doors, 4Doors)
- Brand of LEDs: LED CREE
- Color: 3000K - CRI: > 90 (Color: 2700 - 6000K, RGB, RGBW)
- Angle: Series (1Door, 2Doors, 3 Doors, 4Doors)
- Function Dimmer: PWM on Power
- Material: IP67 (Body: Aluminum ; Face: Stainless 316)
IP68 (Full Stainless 316)
- Finishing (Color housing): Stainless
- IP Class: 67 for Inground; 68 for Inwater
- Electrical Class: III


- LED lifetime: 50.000hrs
- Lens: Clear
Cellular
Sand
- Standards:
 - +EMC protection
 - +IEC 62031 LED modules for general lighting Safety specifications
 - +IEC 60598 Luminaires – Parts 1+2: General requirements particular requirements and tests

Material PMMA
with UV protection



Pending


IP67

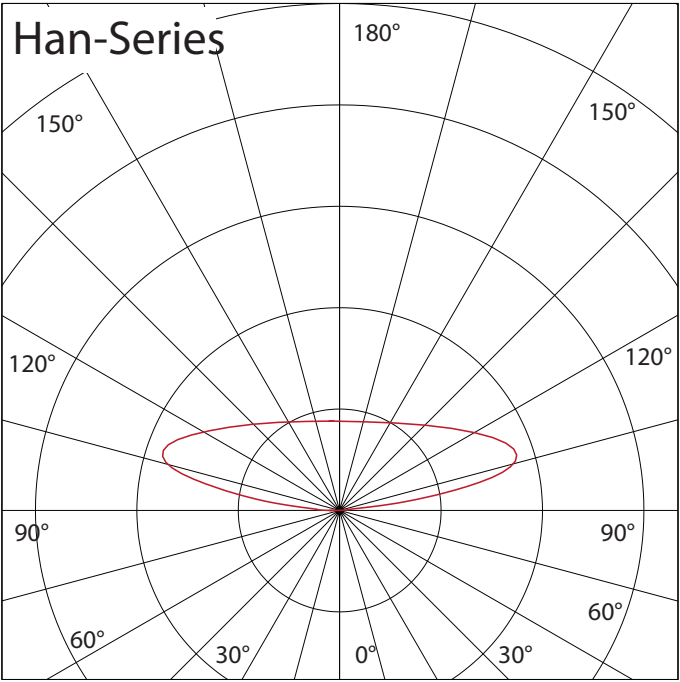


1 Door - 180° - 50Lm at 3000K

Product Description	
Control Gear	Fairchild Technology
LED Module	High-power LEDs on metal-core PCB. Collimating lens made of optical polymer/pmma
Anti-Glare	Option
Electrical Protection	EMC, inrush current
Electrical Class	3


1

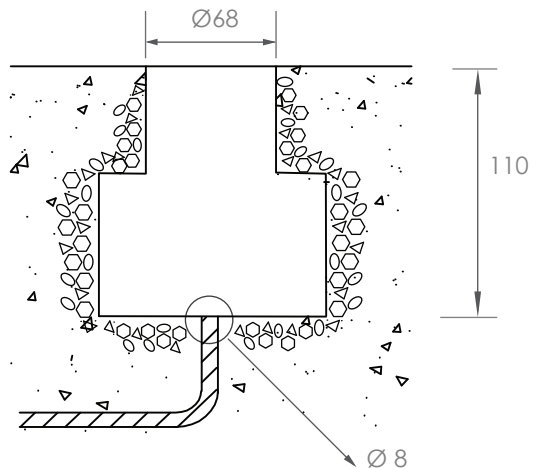

2

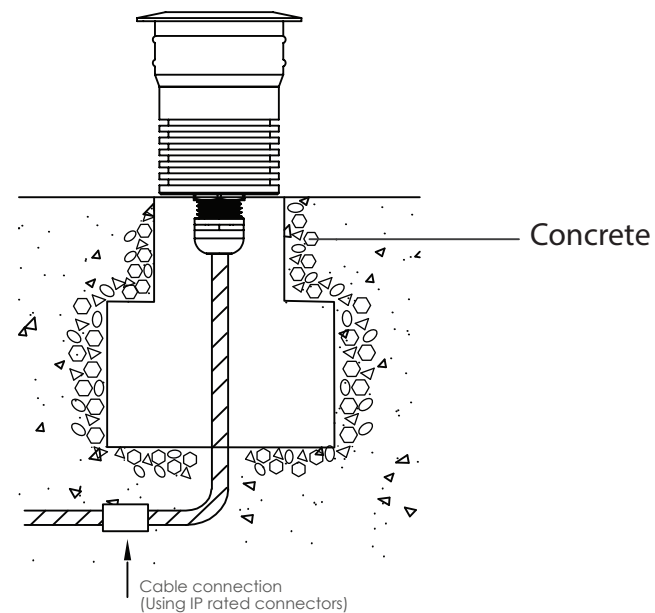







3

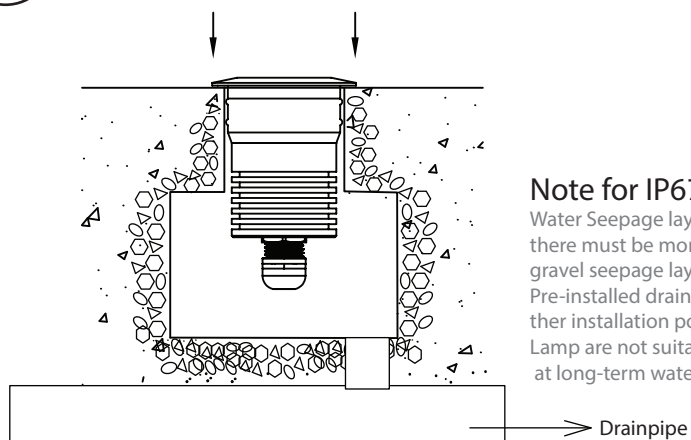



Note for IP67:
Water Seepage layer
there must be more than 20 cm
gravel seepage layer or
Pre-installed drainage pipe under
ther installation position.
Lamp are not suitable for installation
at long-term water soaked position

4

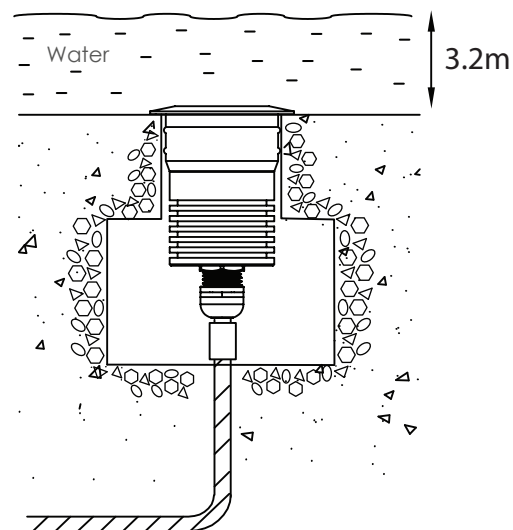

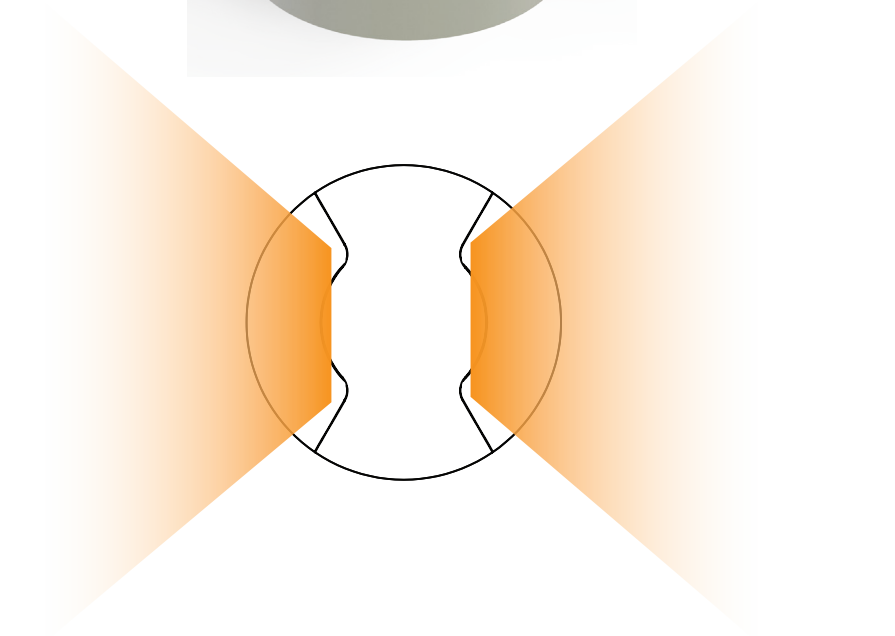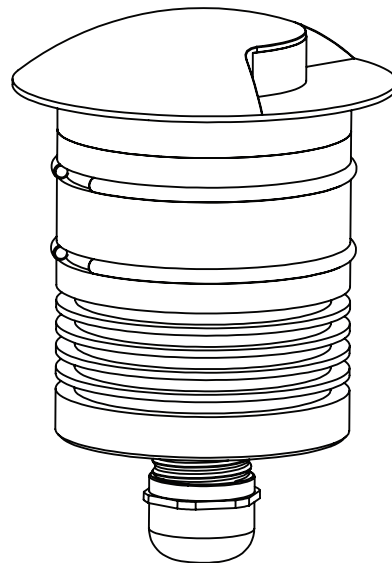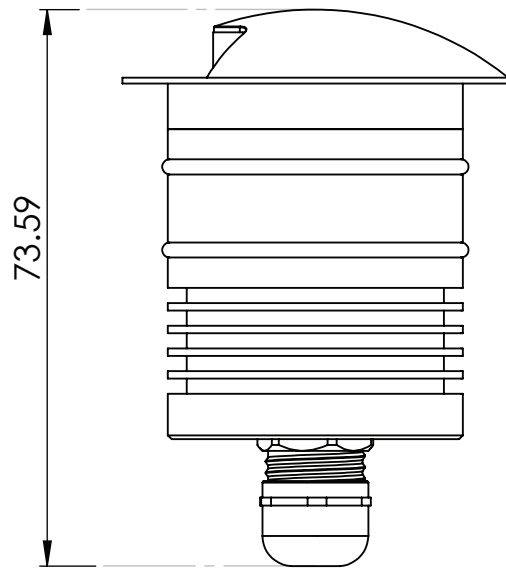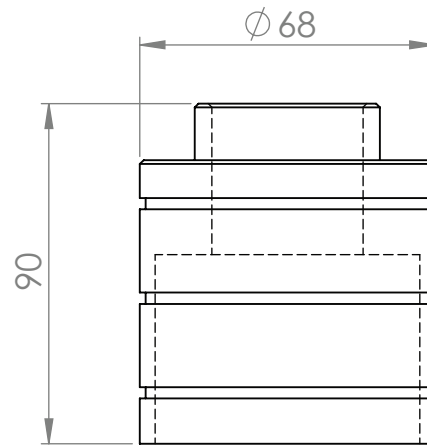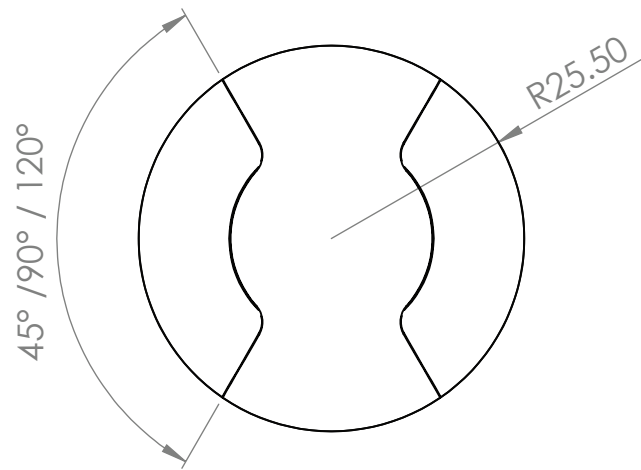

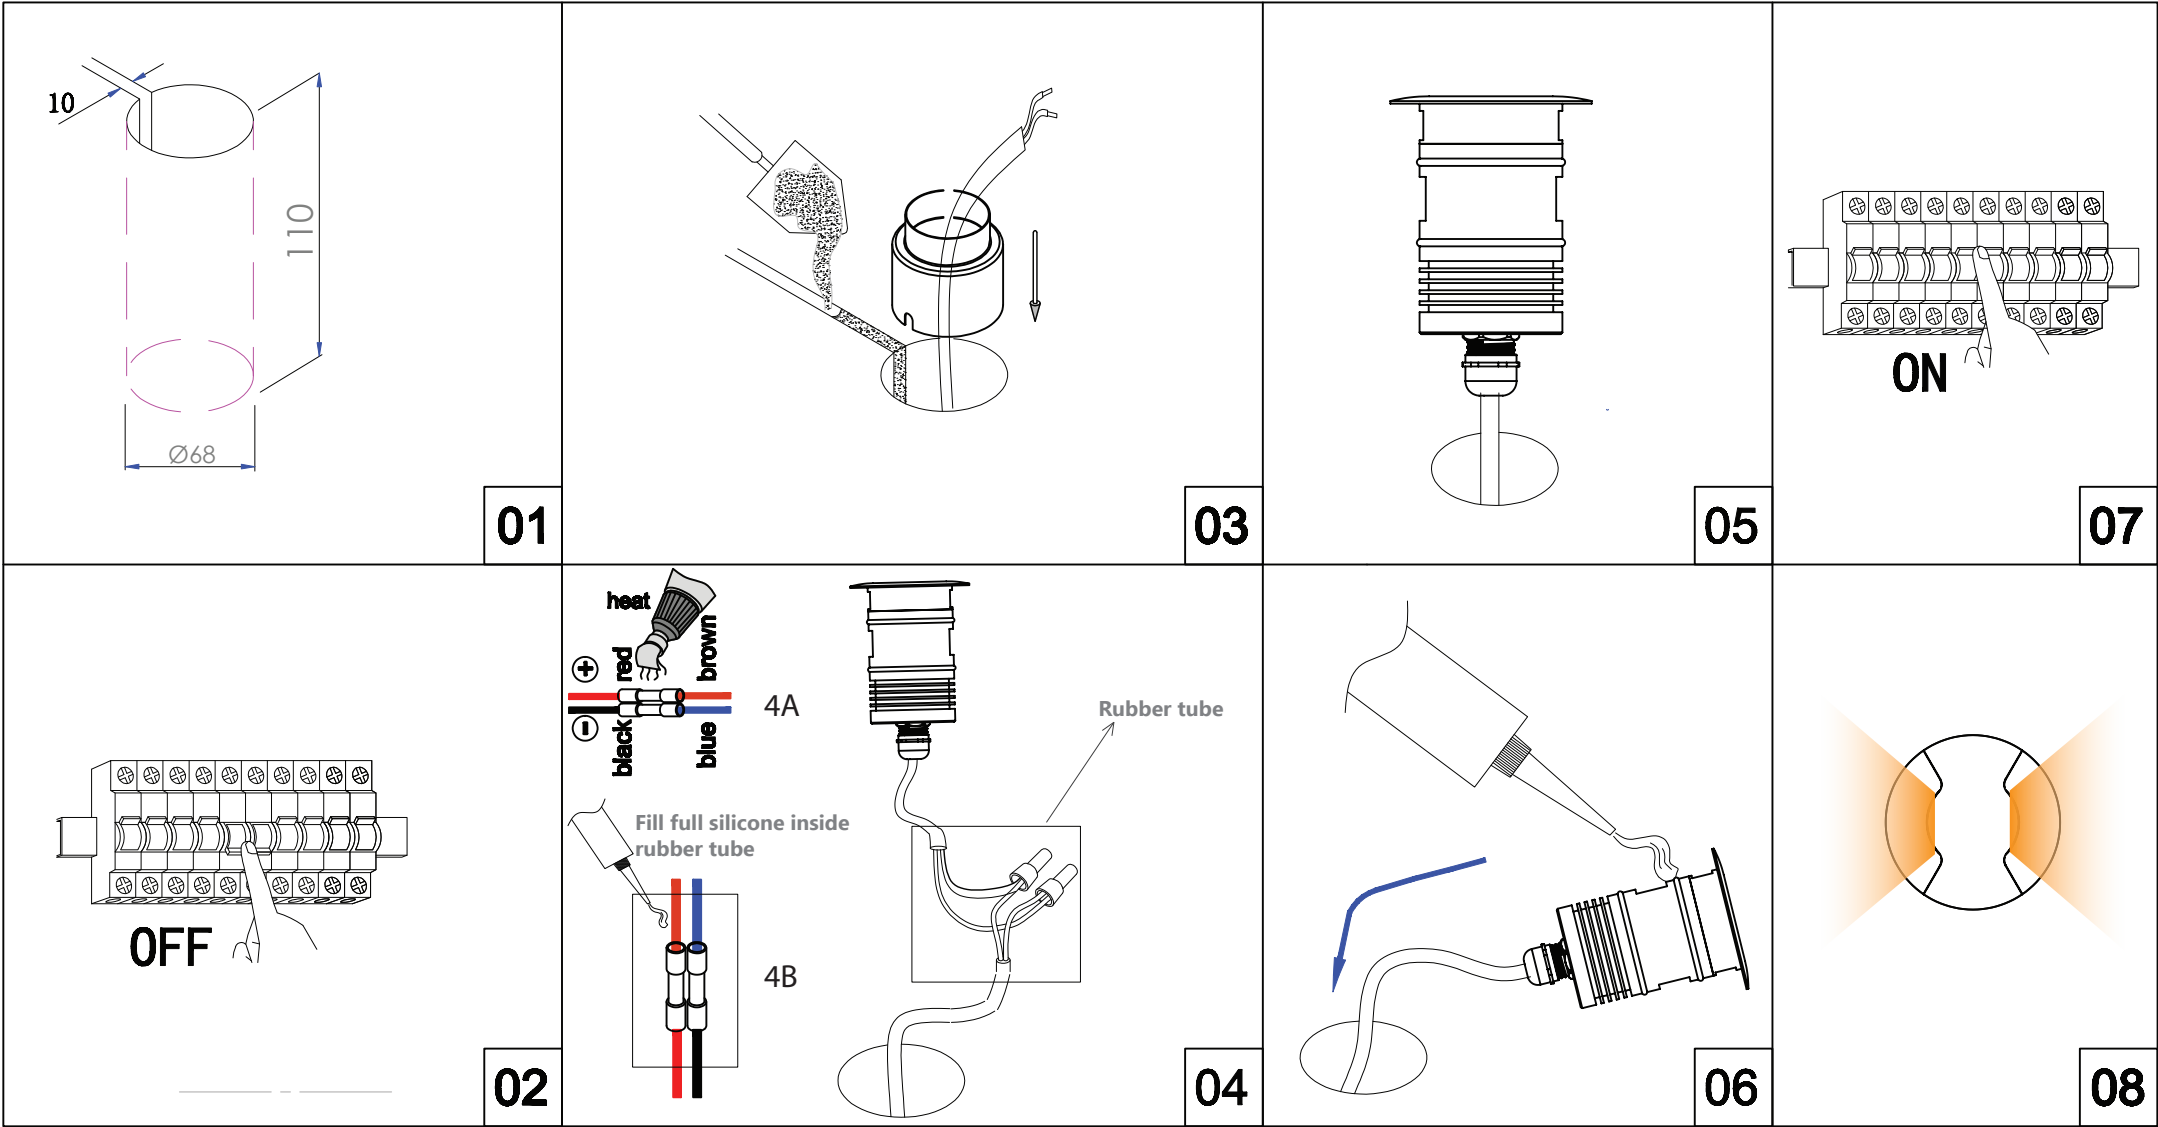

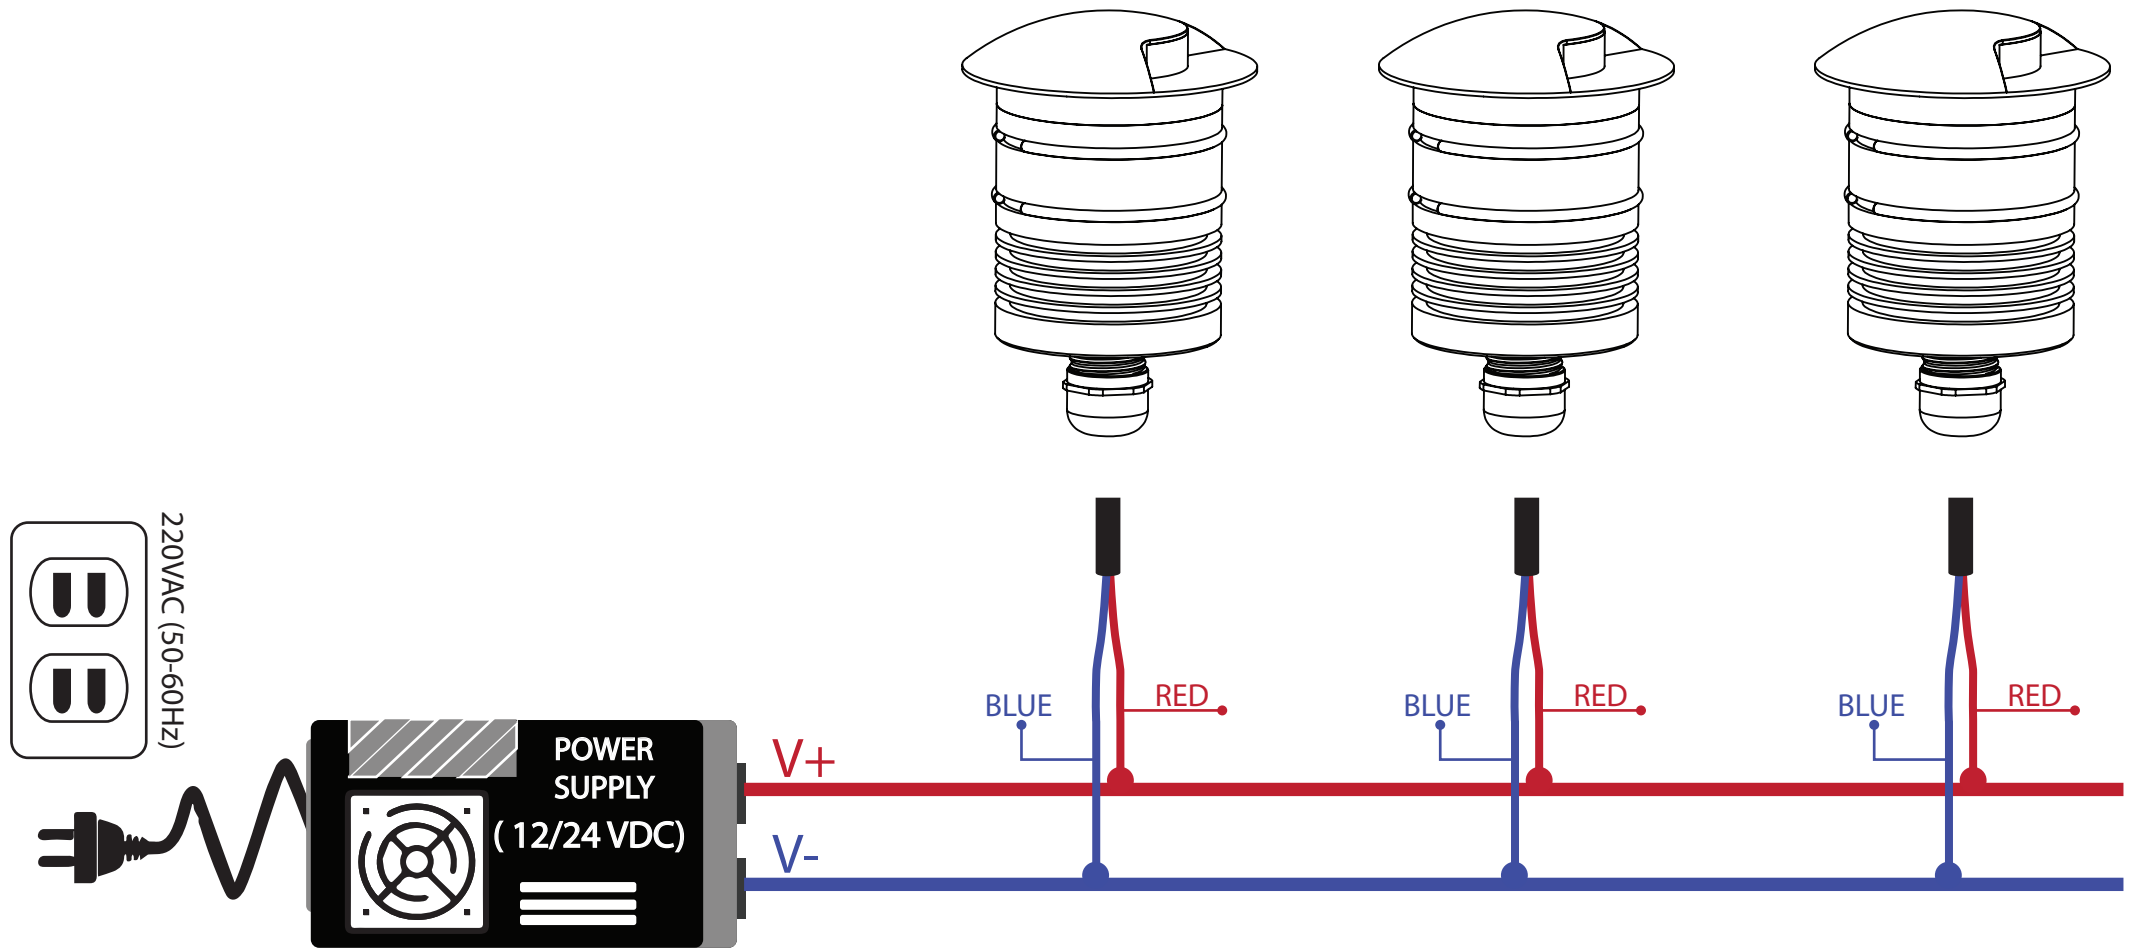

220VAC (50-60Hz)

