



Orcus-M
Inground Light




- Code Product: Orcus-M
- Dimension: Ø115mm x H75mm; Cutout: Ø98x110mm
- Input Voltage: IP68 - 24VDC; IP67: 24VDC/110-240VAC (43-60Hz)
- Power consumption: Series M (6W, 9W, 12W, 15W)
- Luminous Flux: 920Lm at 3000K, 15W
- Brand of LEDs: LED CREE / LED Engin
- Color: 3000K - CRI: > 90 (Color: 2700 - 6000K, RGB, RGBW)
- Angle: 6° x 45°
- Function Dimmer: PWM on Power only for 24VDC
- Material: IP67: Body: Aluminium; Face: Stainless 316
IP68: Stainless 316
- Finishing (Color housing): Stainless
- IP Class: 67 for Inground; 68 for Inwater
- Electrical Class: III for 24VDC; I for 110-240VAC (43-60Hz)

- LED lifetime: 50.000hrs
- Lens: Clear
Cellular
Sand | Material PMMA with UV protection
- Standards:
 - +EMC protection
 - +IEC 62031 LED modules for general lighting Safety specifications
 - +IEC 60598 Luminaires – Parts 1+2: General requirements particular requirements and tests








IP67

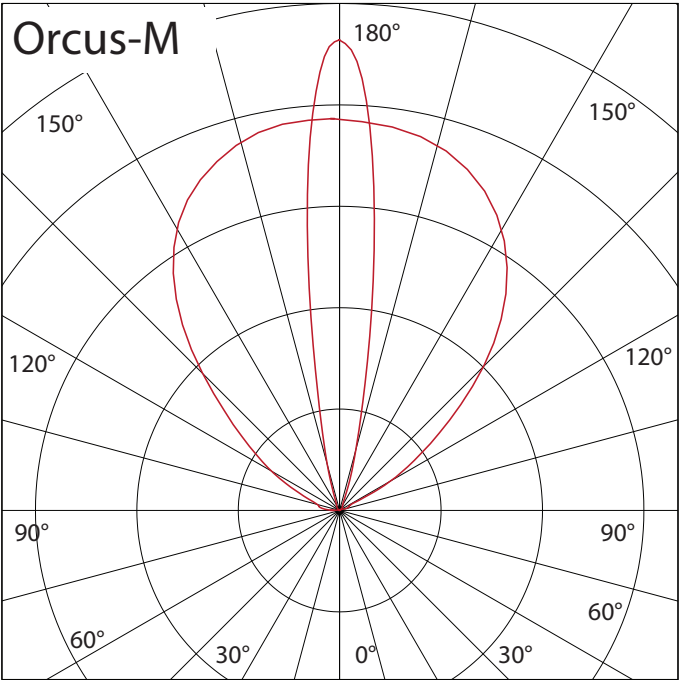


920Lm at 3000K, 15W

Product Description	
Control Gear	Fairchild Technology
LED Module	High-power LEDs on metal-core PCB. Collimating lens made of optical polymer/pmma
Anti-Glare	Option
Electrical Protection	EMC, inrush current
Electrical Class	3

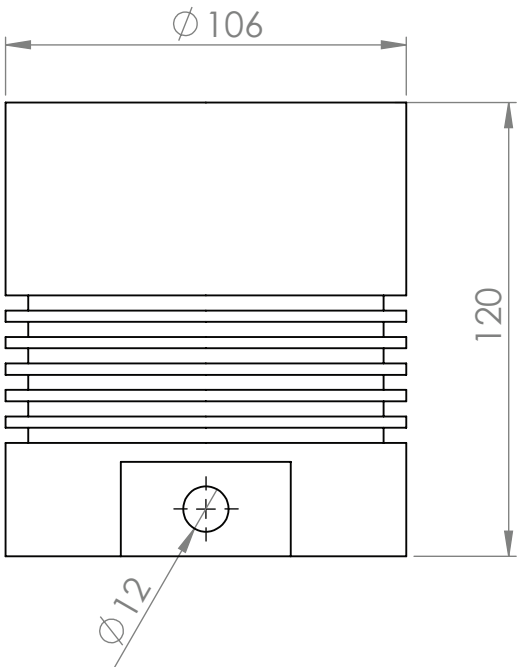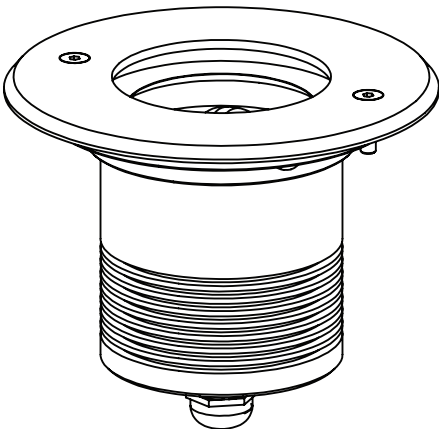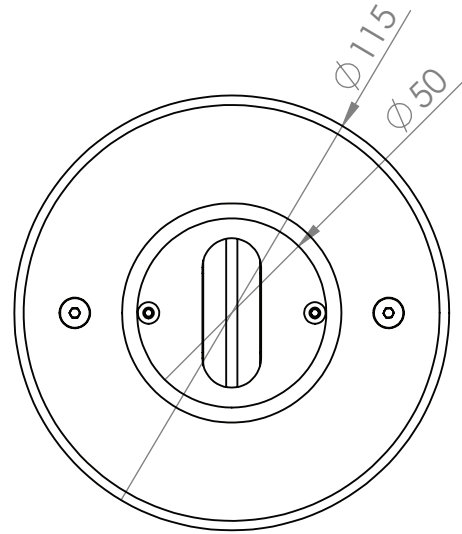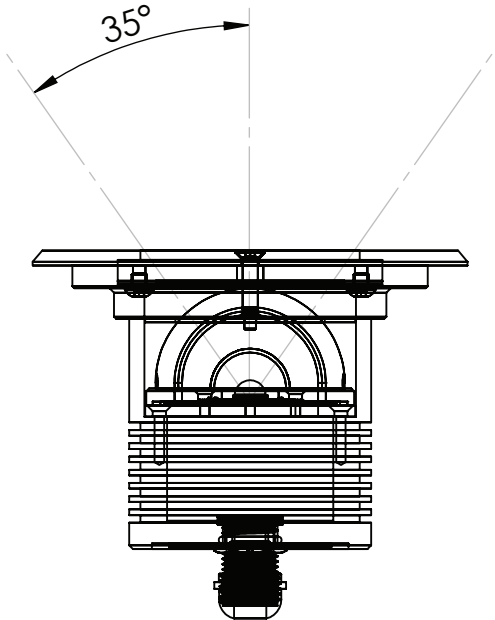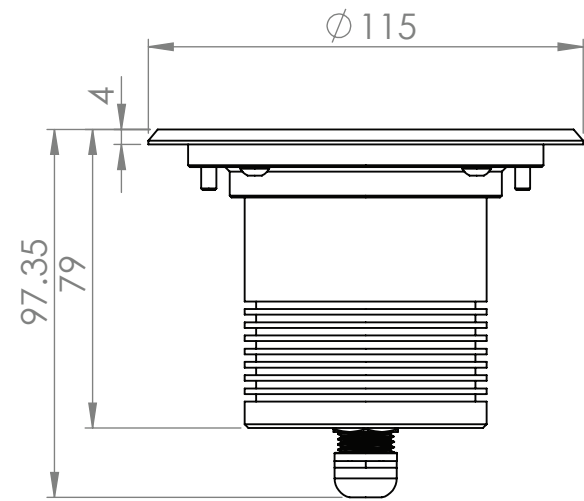


Recessed Box


1

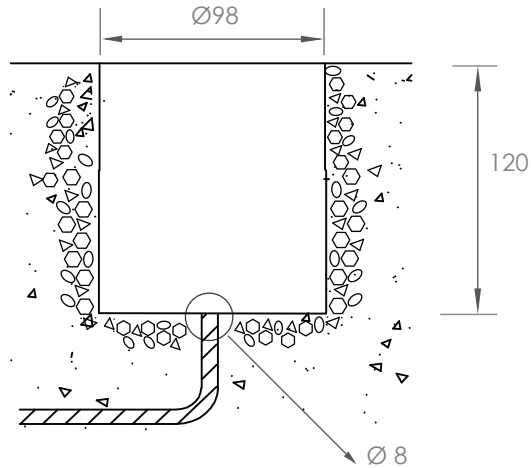

2

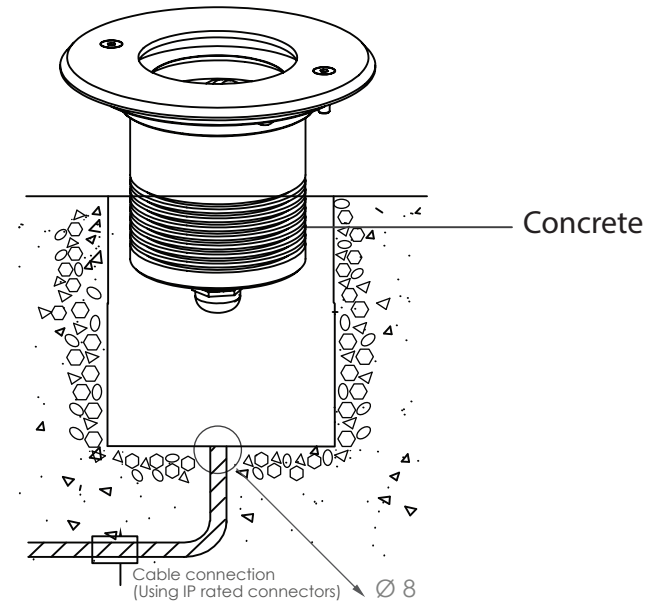

3

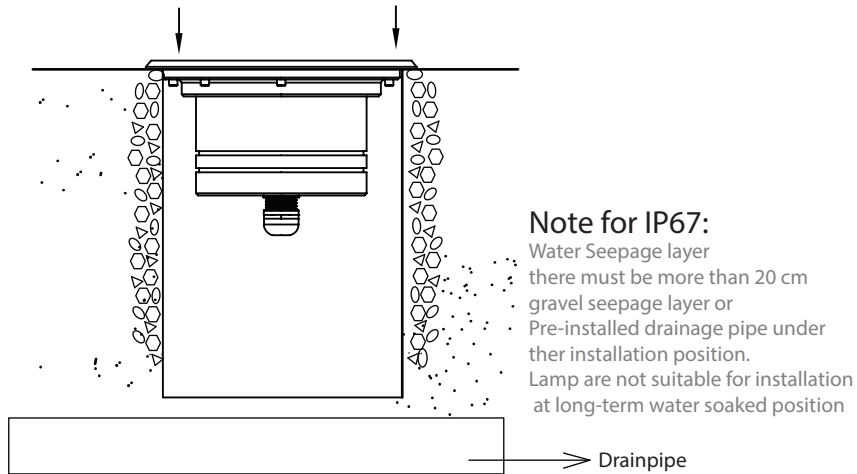

4

