




Gyros-Series
LIGHT



- Series Name: Gyros9, Gyros12, Gyros15
- Dimension: Ø278, 260, 245mm x H43mm;
- Input Voltage: 24VDC
- Power consumption: Series
Luminous Flux: 3010Lm at 4000K, 34W, 36°
- Brand of LEDs: LED CREE
- Color: Warm White, Blue Roya, RGB
- Beam Angle: 5°, 10°, 15°, 24°, 36°, 45°, 60°, 90°
- Function Dimmer: PWM on Power
- Material: SS316L
- Finishing (Color housing): Stainless
- IP Class: 68
- Electrical Class: III
- Cable Lenght: 5 Metter

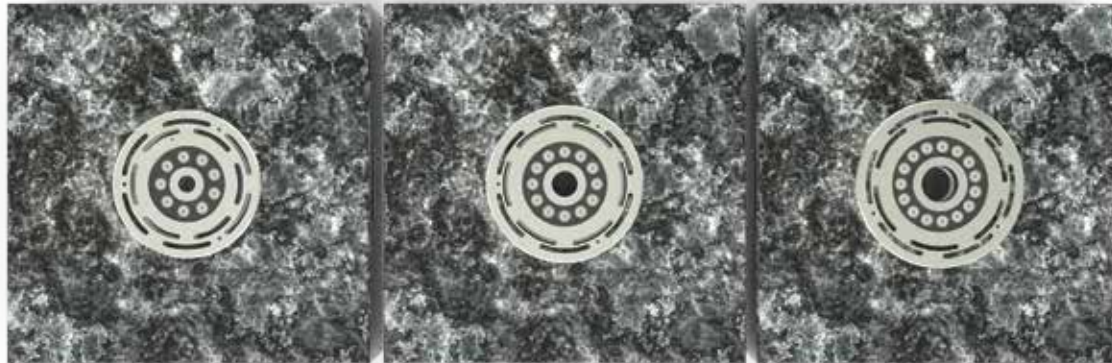


- LED lifetime: 50.000hrs
- Lens: Clear
Cellular
Sand
Material PMMA
with UV protection
- Standards:
 - +EMC protection
 - +IEC 62031 LED modules for general lighting Safety specifications
 - +IEC 60598 Luminaires – Parts 1+2: General requirements particular requirements and tests






Pending

Technical tolerance: 5%



GyrosM-34S40055I6I

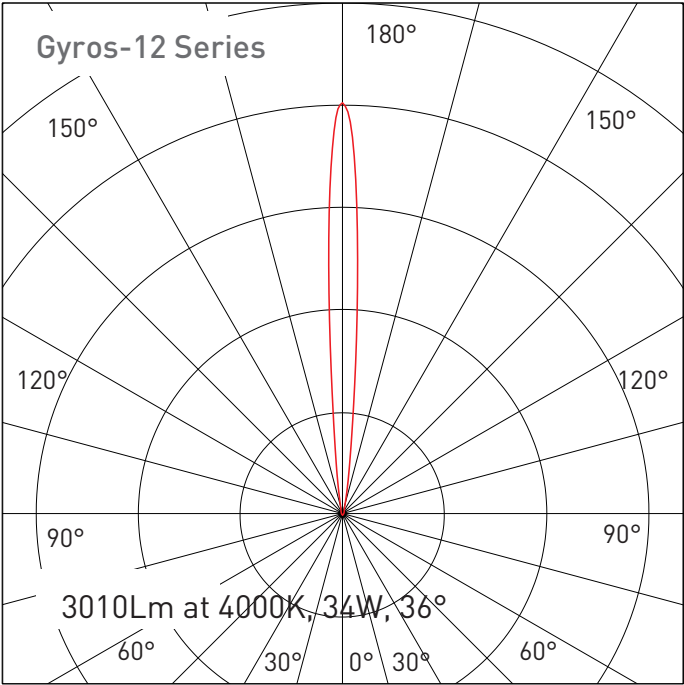



Product Description	
Control Gear	Fairchild Technology
LED Module	High-power LEDs on metal-core PCB. Collimating lens made of optical polymer/pmma
Anti-Glare	Option
Electrical Protection	EMC, inrush current
Electrical Class	3

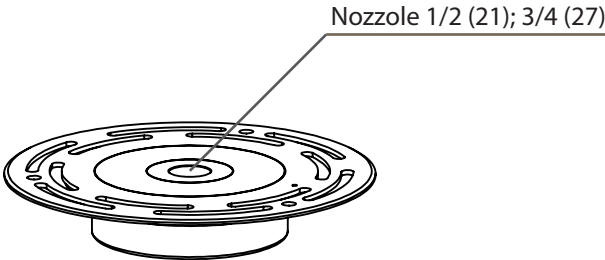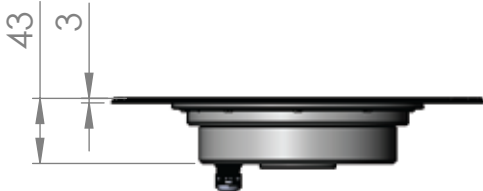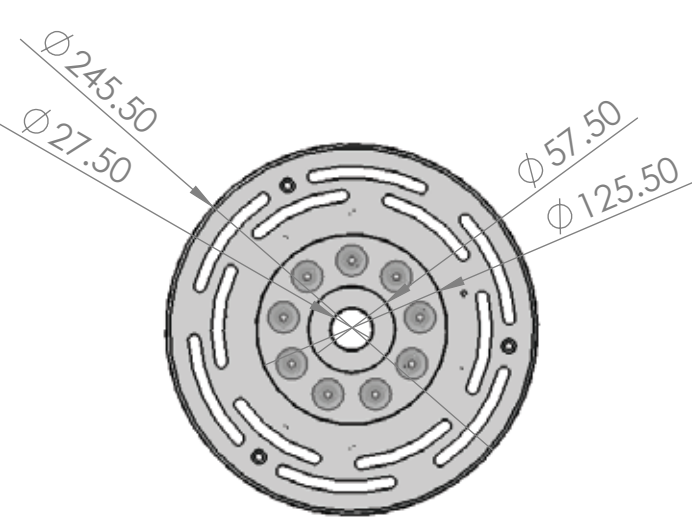



Gyros-9

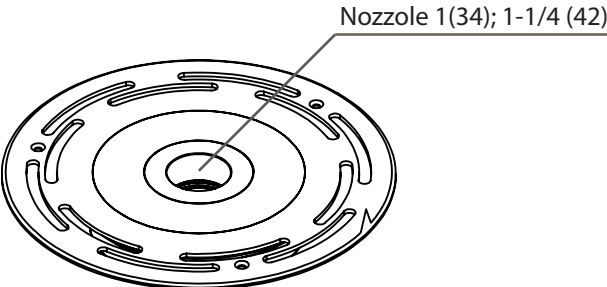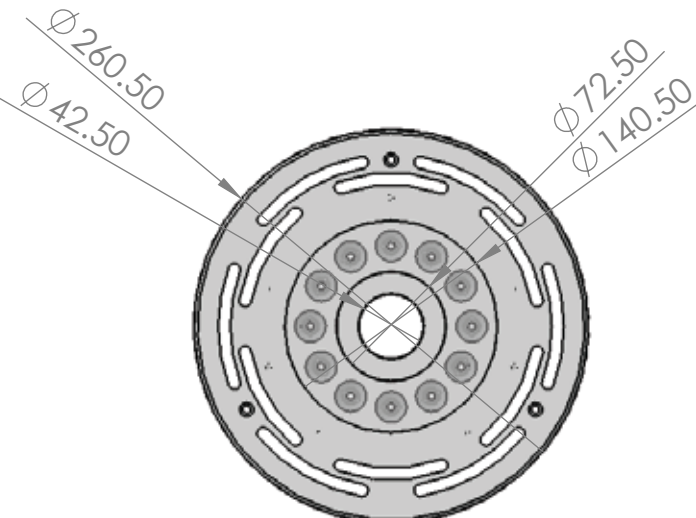

Gyros-12

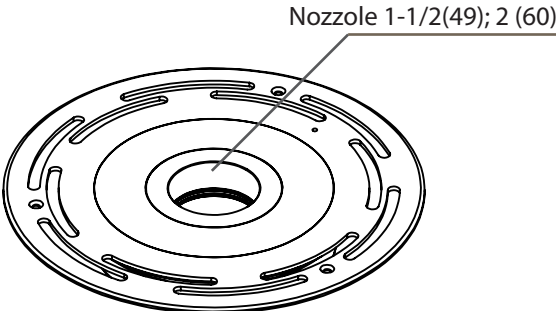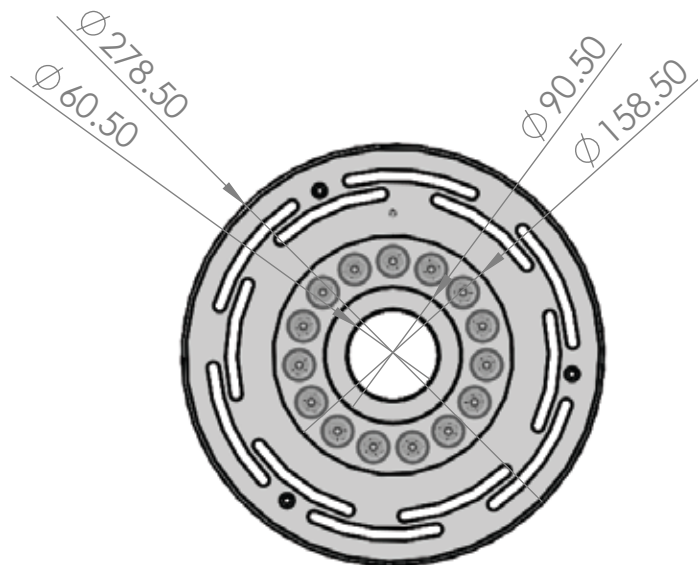


Gyros-15

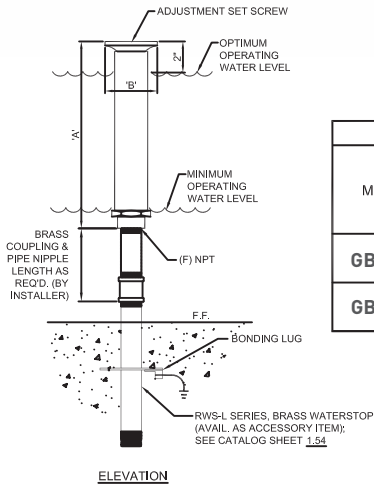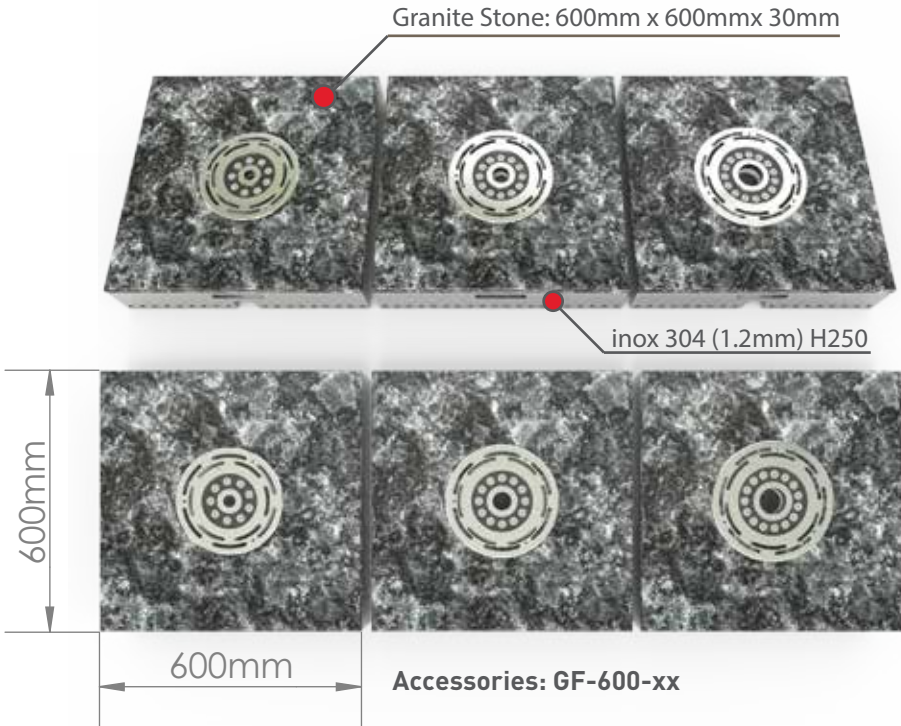


Accessories: G1-xxx



Accessories: GR-FJ10

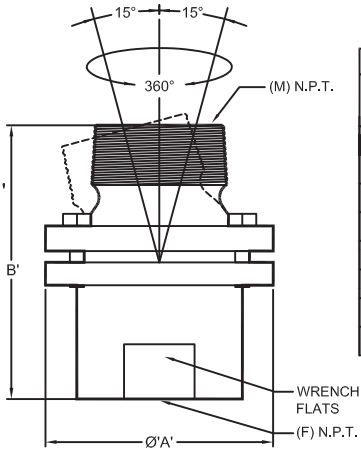

TECHNICAL DATA			
MODEL NO.	(M x F) N.P.T.	A	B
G1-050	1/2"	1.62"	1.75"
G1-075	3/4"	2.60"	2.60"
G1-100	1"	2.60"	2.82"
G1-125	1 1/4"	3.25"	3.46"
G1-150	1 1/2"	3.65"	3.83"
G1-200	2"	4.00"	4.45"
G1-300	3"	6.00"	6.10"
G1-400	4"	7.75"	7.36"

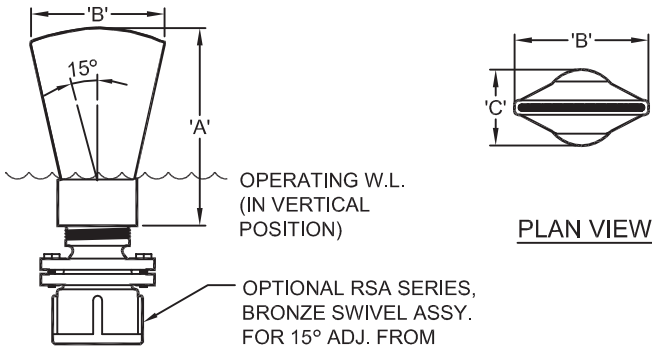

FRONT ELEVATION

TECHNICAL AND HYDRAULIC DATA									
MODEL No	DIMENSIONS			INLET N.P.T. (Female)	SPRAY DIAMETER	PERFORMANCE			
	DIM 'A'	DIM 'B'				12"	24"	30"	48"
GBJ-512	12"	1 5/8"	1/2"		GPM	6.0	9.0	10.0	
					HEAD	3'	5'	6'	
GBJ-112	12"	3 3/8"	1"		GPM	9.0	11.0	12.0	13.0
					HEAD	3'	5'	6'	8'

TECHNICAL AND HYDRAULIC DATA									
DIMENSIONS					PERFORMANCE @ 45°				
MODEL NO.	DIM. 'A'	DIM. 'B'	DIM. 'C'	(F) N.P.T.	THROW	2'	3'	5'	7'
	4-1/2"	2 3/4"	1-13/16"	1"	GPM	9	12	14	19
					HEAD	3'	4'	6'	8'
					SPREAD	20"	30"	65"	94"
					HEIGHT	20"	24"	45"	52"

