



Bury-12 Series

Inground / inWater Light



In Water



In Ground



- Code Product: Bury12-Series
- Dimension: Ø175mm x H69mm(IP68: H: 55); Cutout: Ø162x105mm
- Input Voltage: IP68-12VAC/24VDC; IP67: 24VDC/110-240VAC (43-60Hz)
- Power consumption: Max 12x2W
- Luminous Flux: 2380Lm at 24W 3000K, 24VDC, CRI>80
- Brand of LEDs: LED CREE
- Color: 3000K - CRI: > 80 (Single Color; RGB; RGBW)
- Beam Angle: 10° (orther angle please contact us)
- Function Dimmer: Option
- Material: Body: IP67-Body: Aluminium Anode ; Face: Inox316
- IP68- Full Stainless 316
- Finishing (Color housing): Stainless
- IP Class: 67 for Inground; 68 for Inwater
- Class: III for IP68; I for IP67


- LED lifetime: 50.000hrs
- Lens: Clear
Cellular
Sand
- Standards:
 - +EMC protection
 - +IEC 62031 LED modules for general lighting Safety specifications
 - +IEC 60598 Luminaires – Parts 1+2: General requirements particular requirementsand tests

Material PMMA
with UV protection






IP68

Technical tolerance: 5%

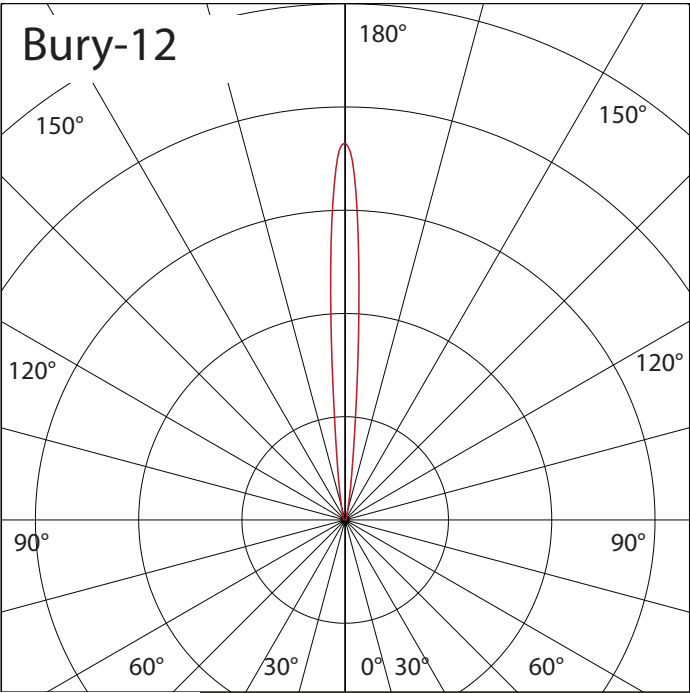


2380Lm at 24W 3000K, 24VDC, CRI>80


Product Description	
Control Gear	Fairchild Technology
LED Module	High-power LEDs on metal-core PCB. Collimating lens made of optical polymer/pmma
Anti-Glare	Option
Electrical Protection	EMC, inrush current
Electrical Class	3

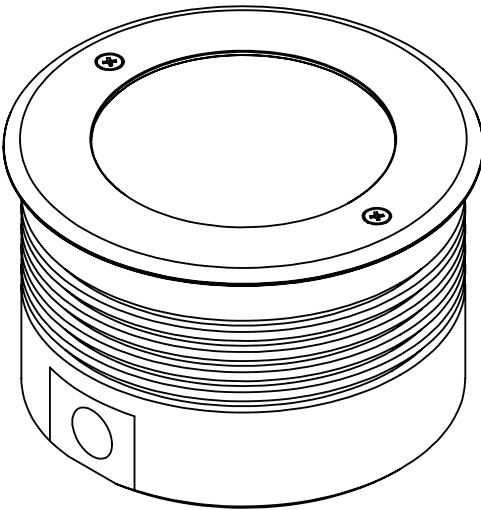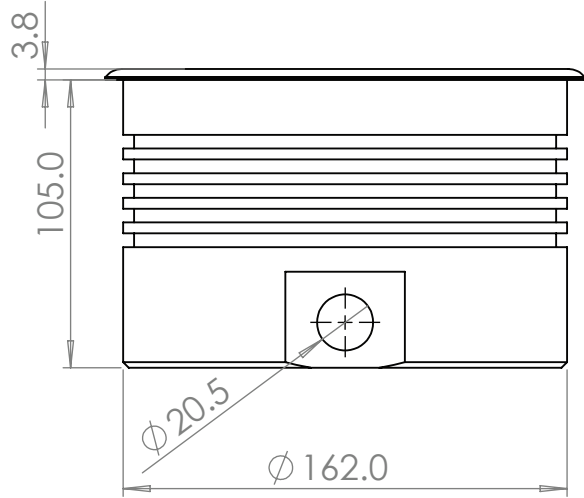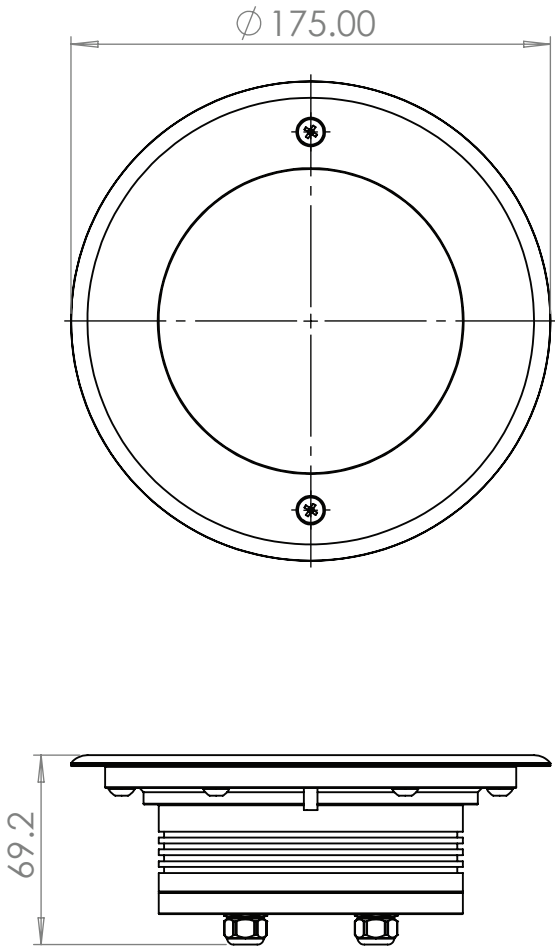


Recessed Box

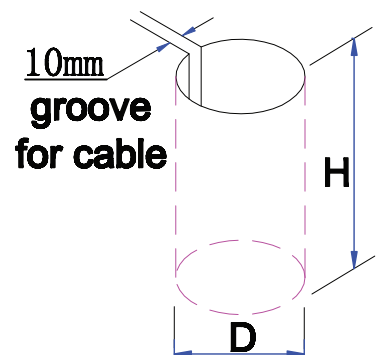


01

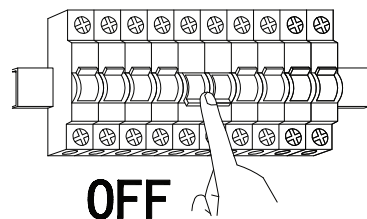


02

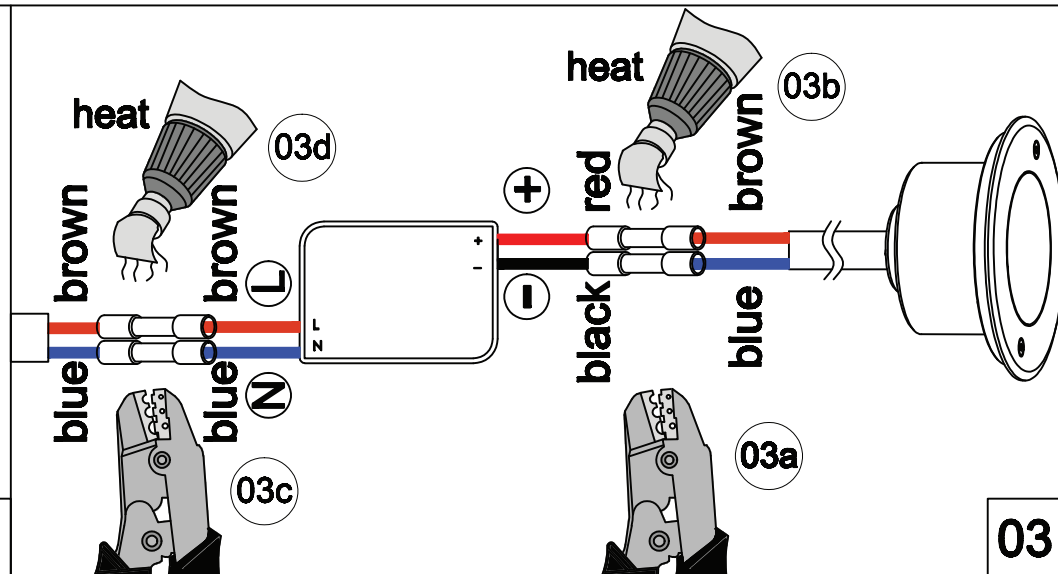


03

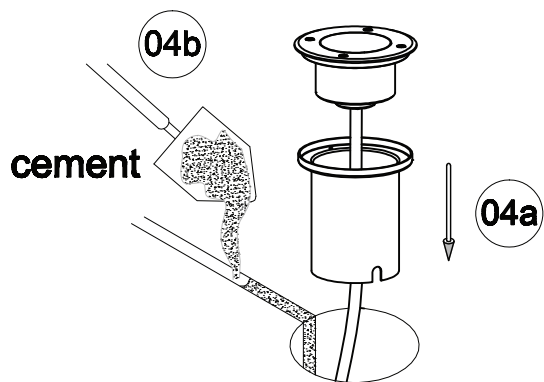


04

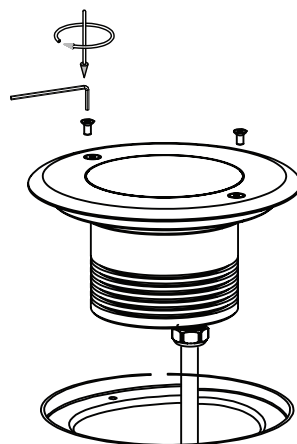

05

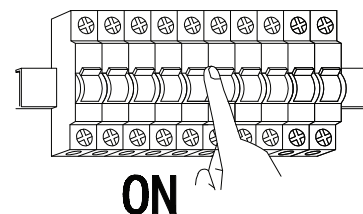


06




07


1

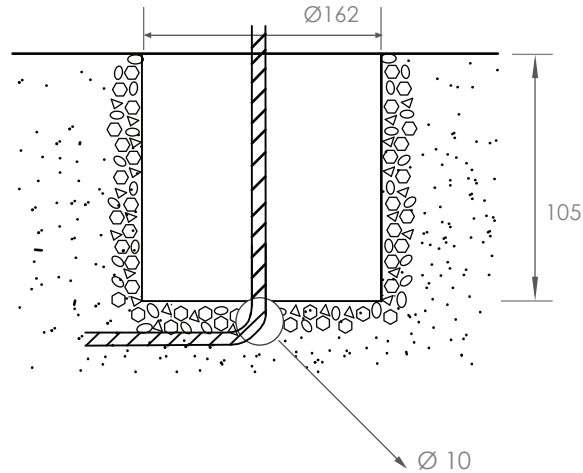

2

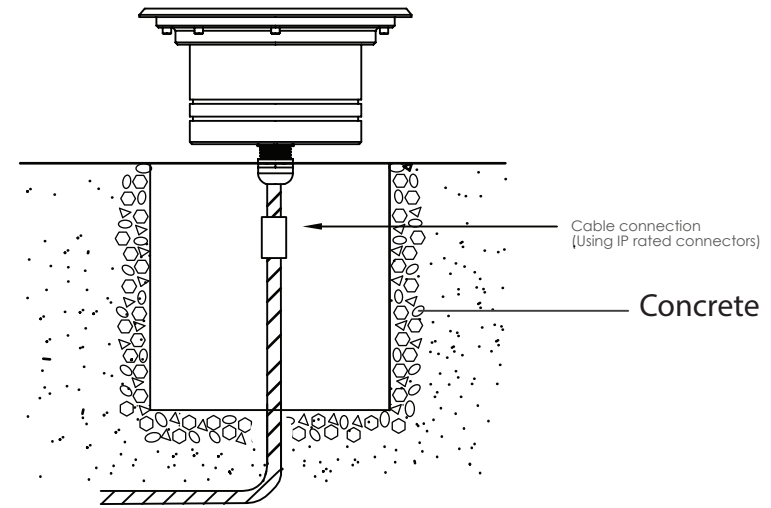

3

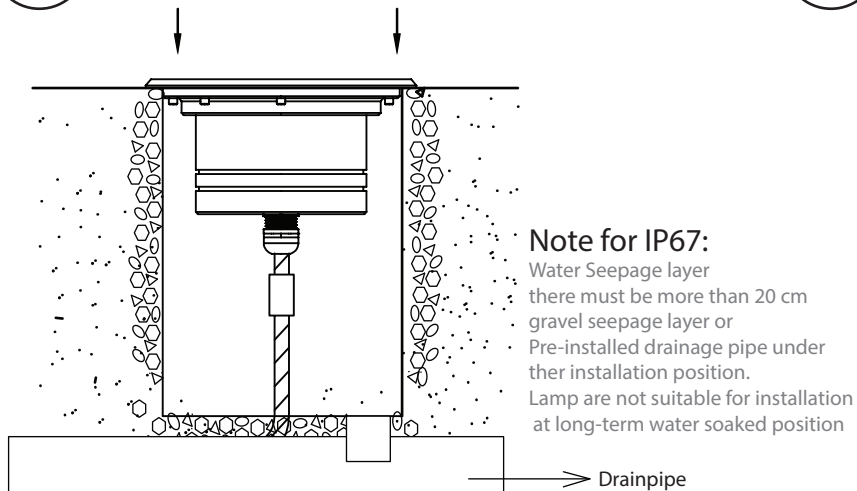

4

