

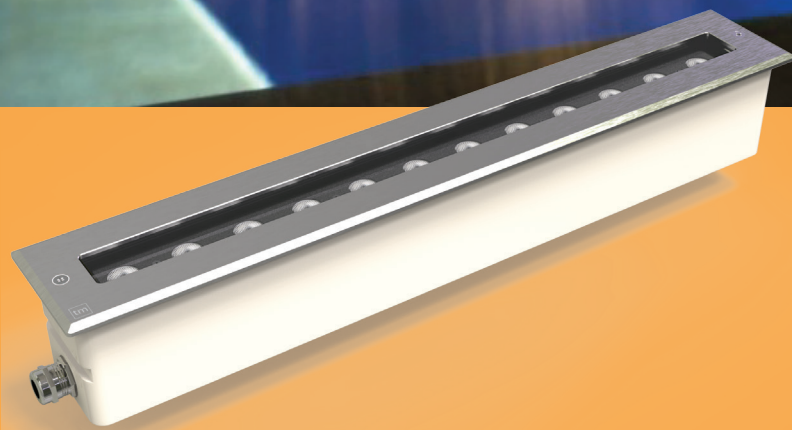


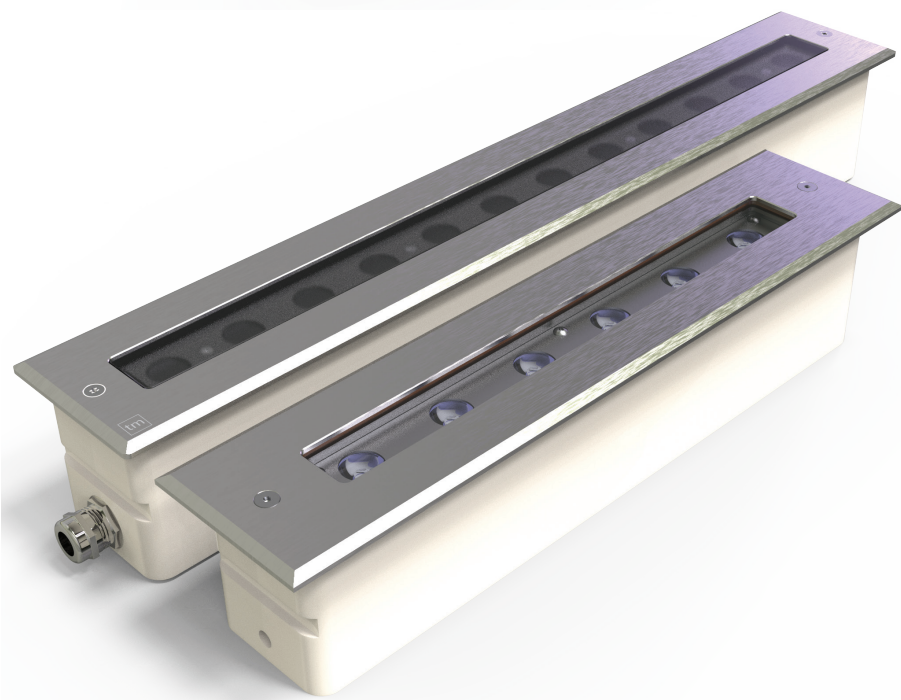

Monica-M Series
Linear inground/inwater

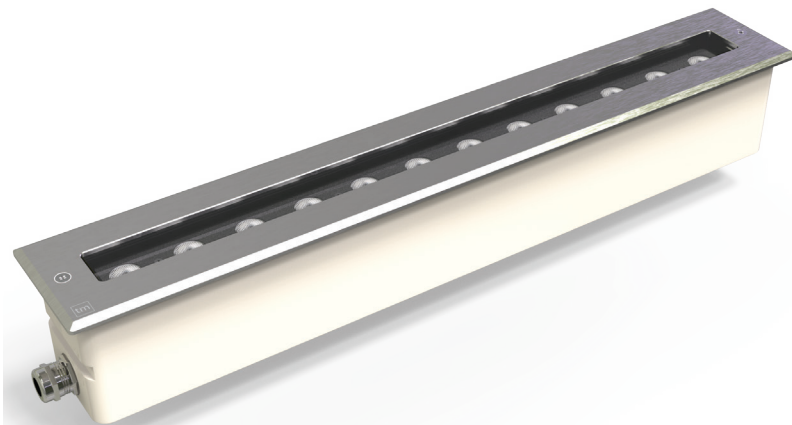


- Code Product: Monica-M Series
- Dimension: L540mm x W86mm x H50 mm - Max 24W
- Input Voltage: 12/24VDC
- Power consumption: Max 24W
- Luminous Flux: 1240lm At RGBW(W=5000K), 14°x40°
- Brand of LEDs: LED CREE
- Color: 3000K - CRI: > 90 (Single color: 2200-6000, RGB, RGBW)
- Beam Angle: 20° (15°, 20°, 24°, 36°, 45°, 60°, 14°x40°)
- Function Dimmer: PWM on Power
- Material: IP68 Full StainLess 316
IP67: Body Aluminium; Face Stainless
- Finishing (Color housing): Stainless
- IP Class : 68
- Electrical Class: III

- LED lifetime: 50.000hrs
- Lens: Clear
Cellular
Sand
Material PMMA with UV protection
- Standards:
+EMC protection
+IEC 62031 LED modules for general lighting Safety specifications










Pending


IP68

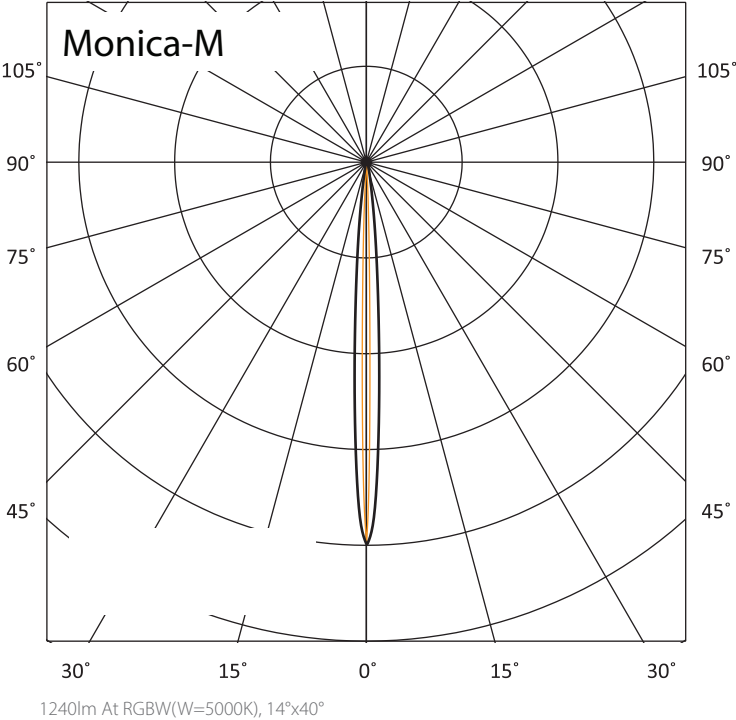



Product Description	
Control Gear	Fairchild Technology
LED Module	High-power LEDs on metal-core PCB. Collimating lens made of optical polymer/pmma
Anti-Glare	Option
Electrical Protection	EMC, inrush current
Electrical Class	3

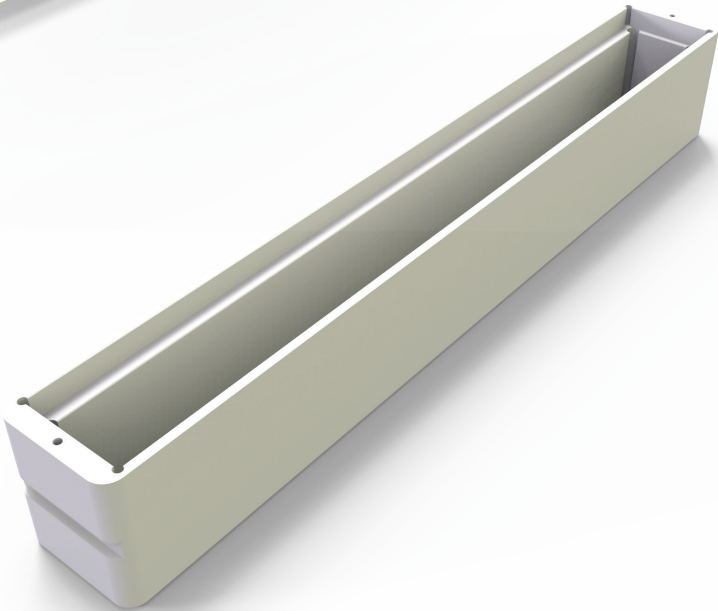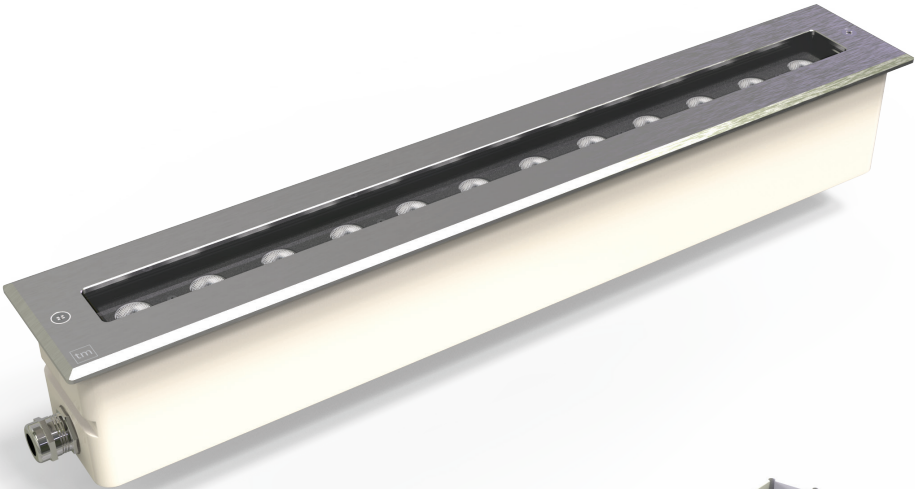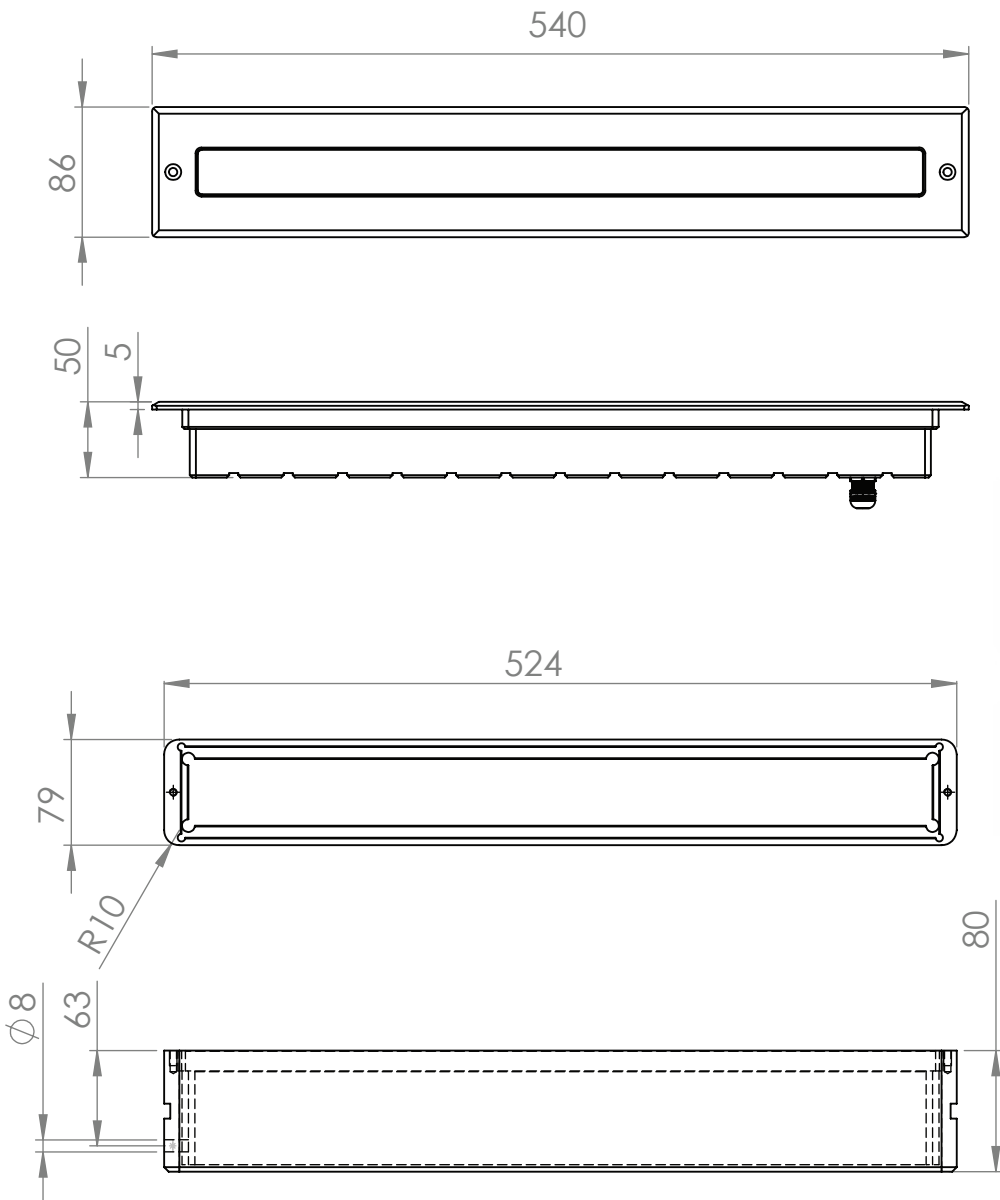

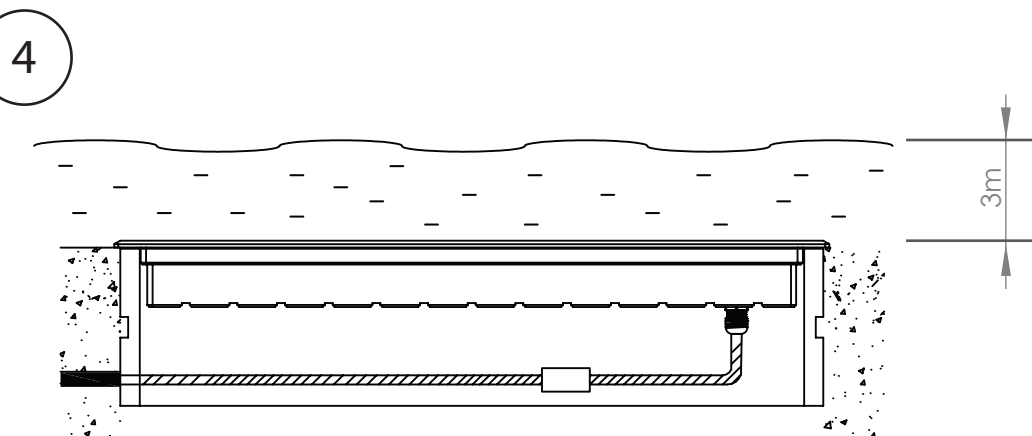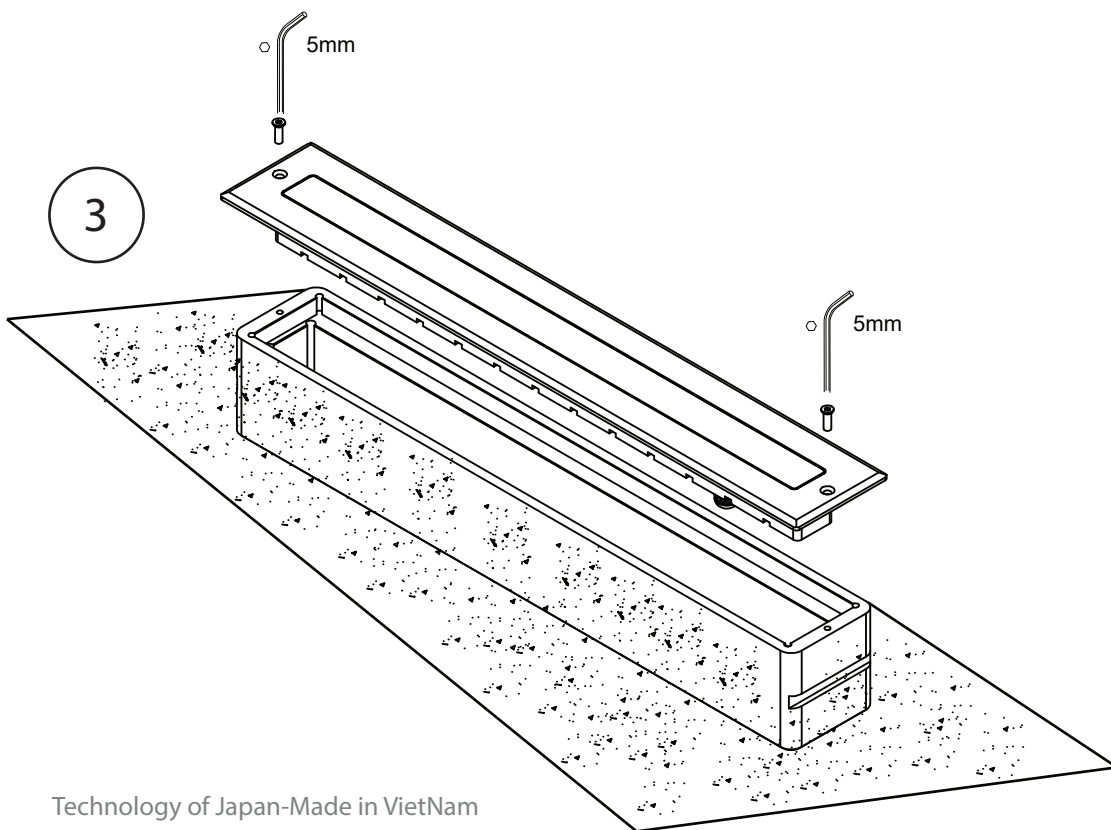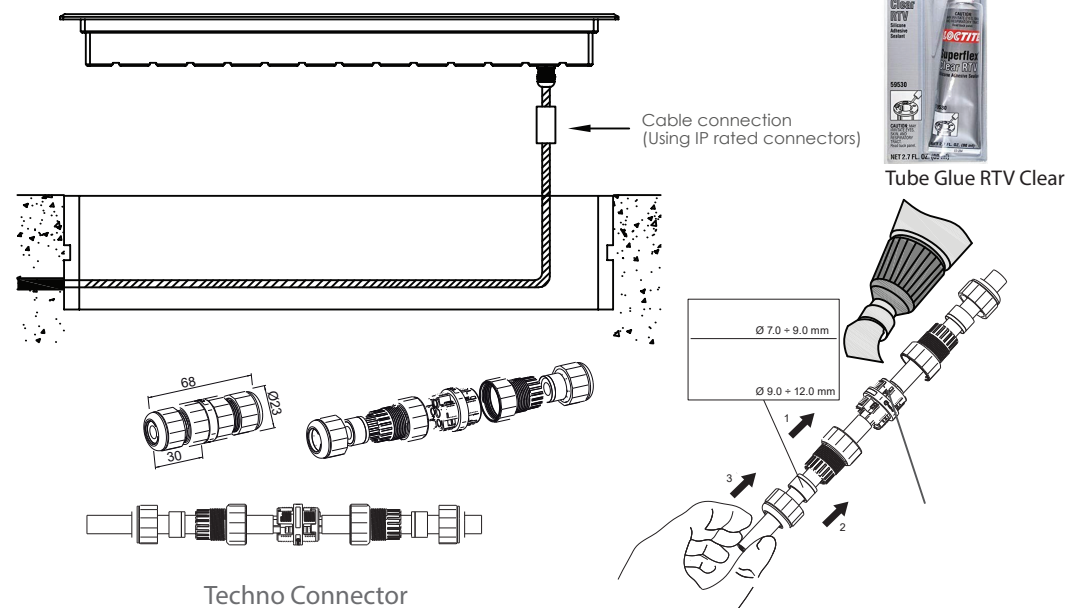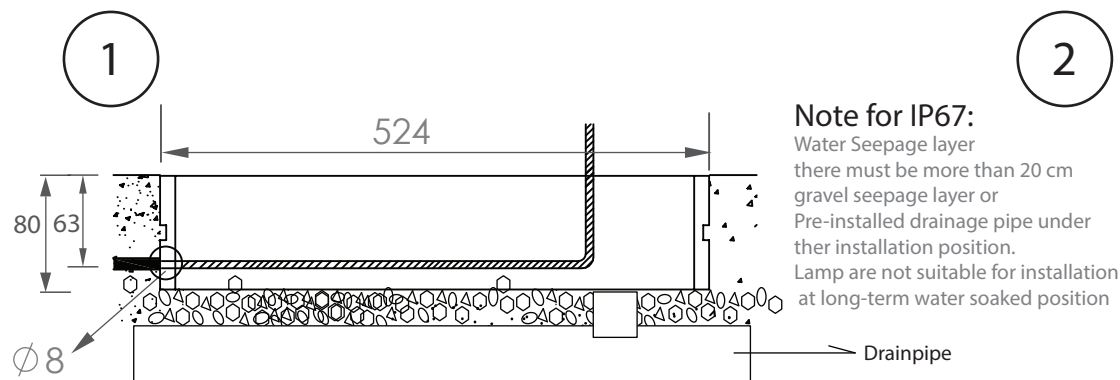

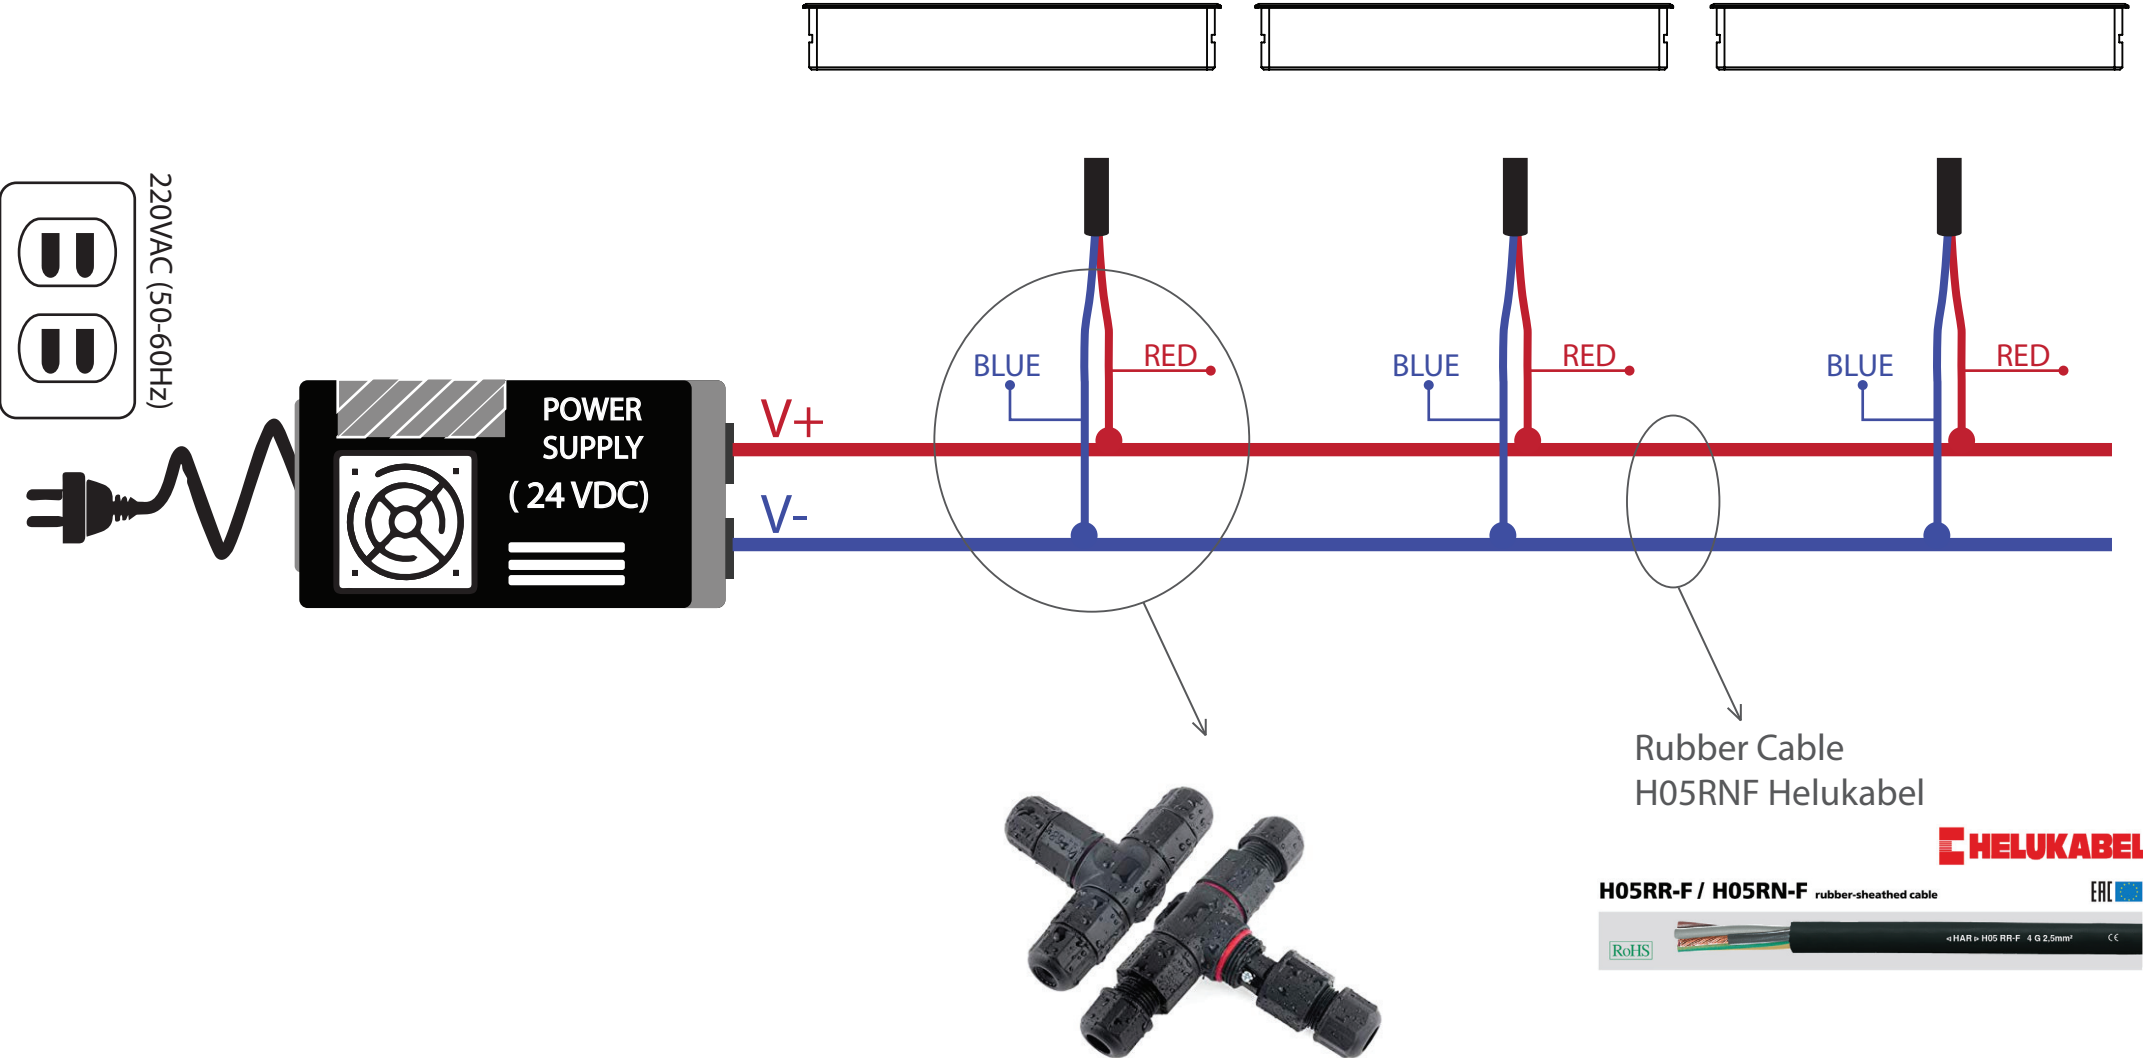

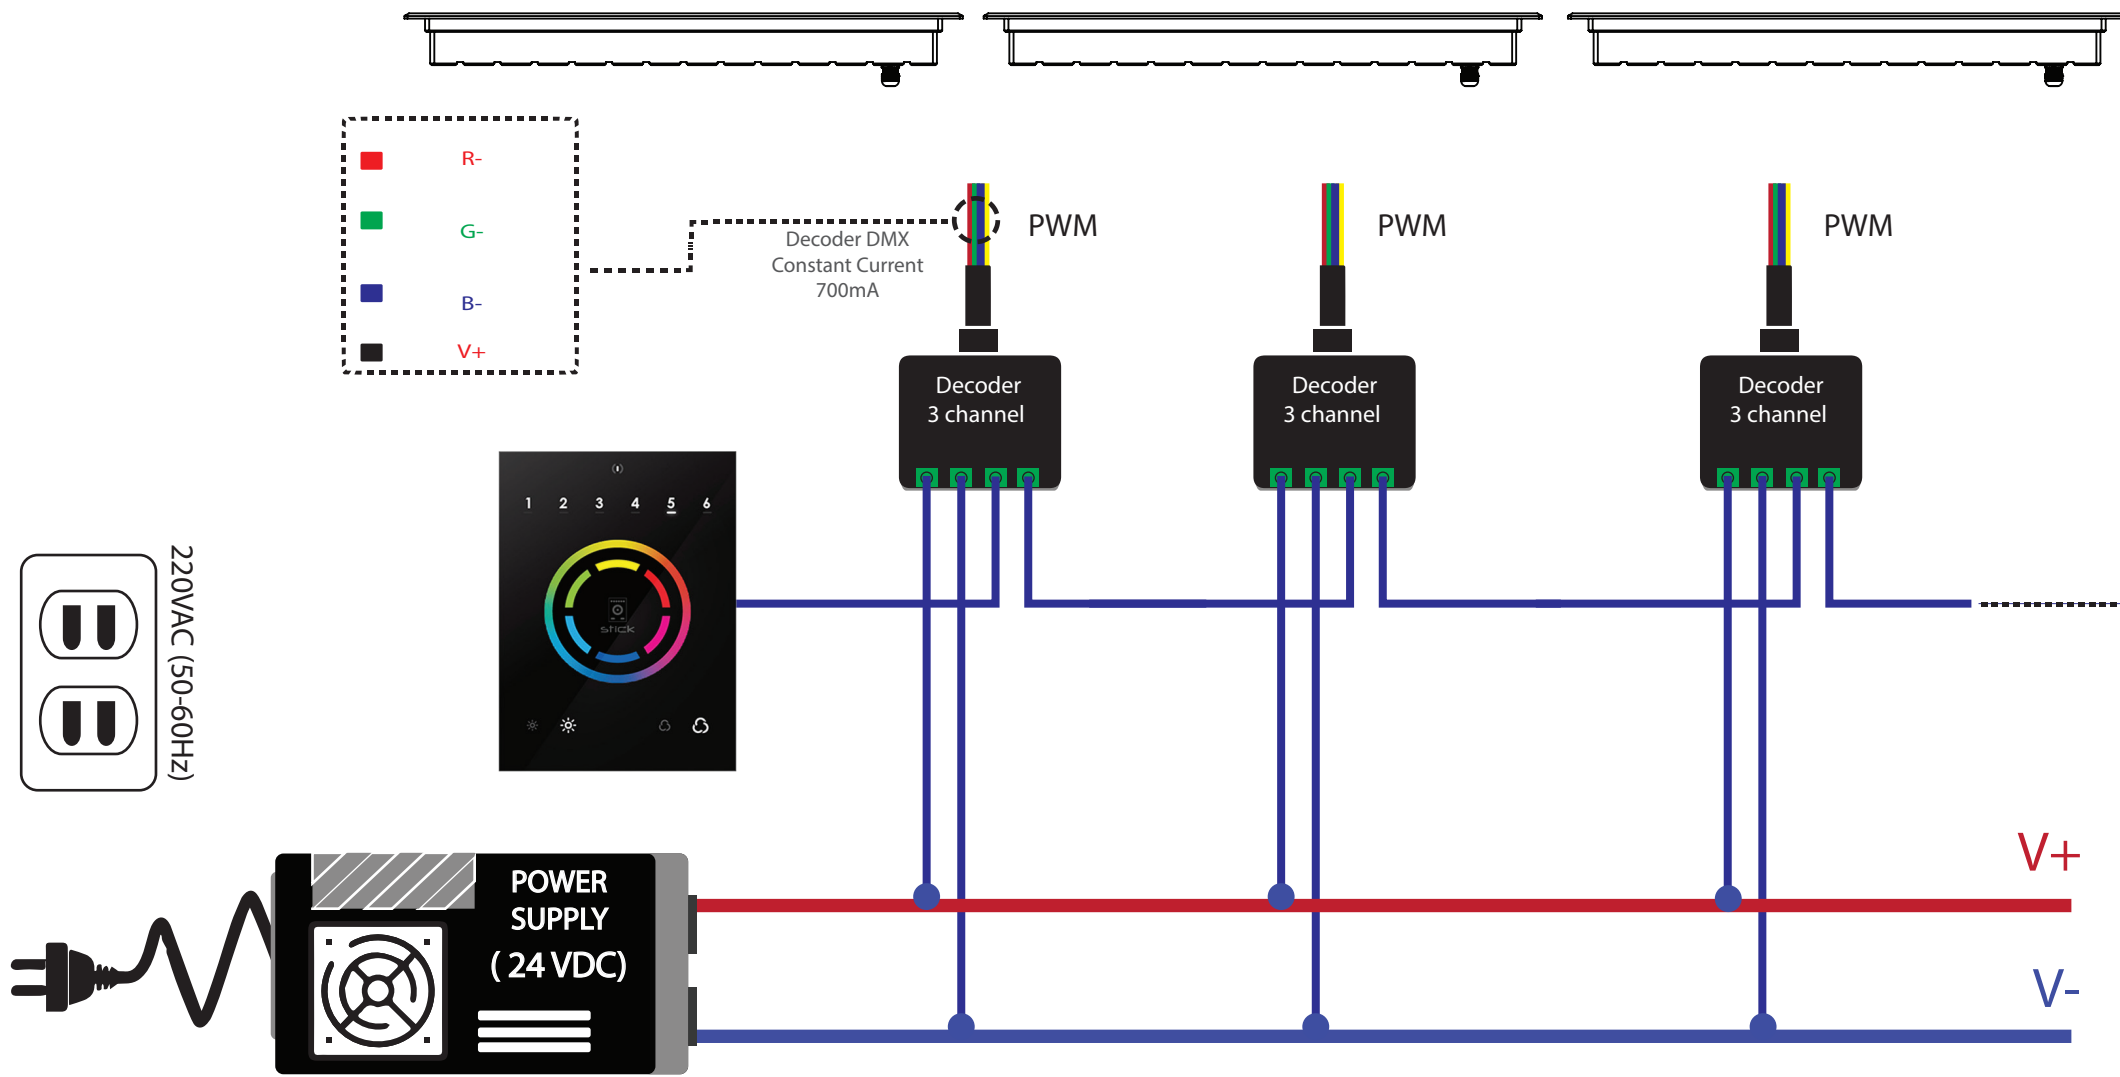

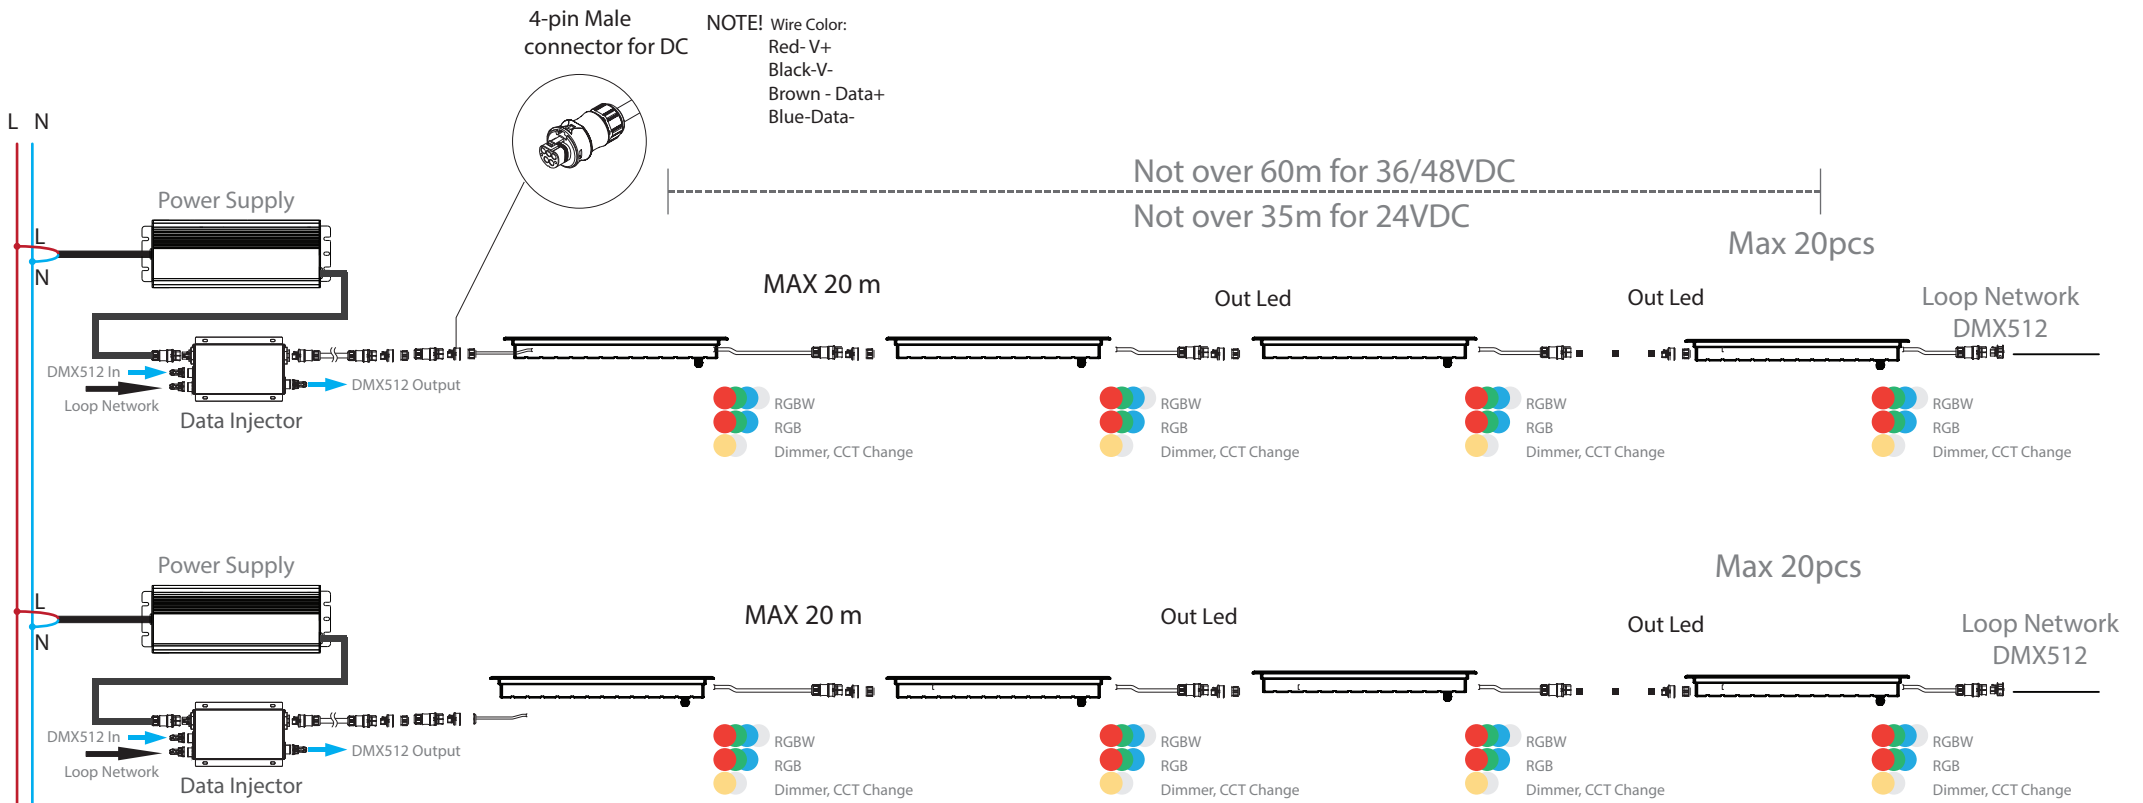

DMX512 with Auto Setting (iDMX512)
14bits resolution

