



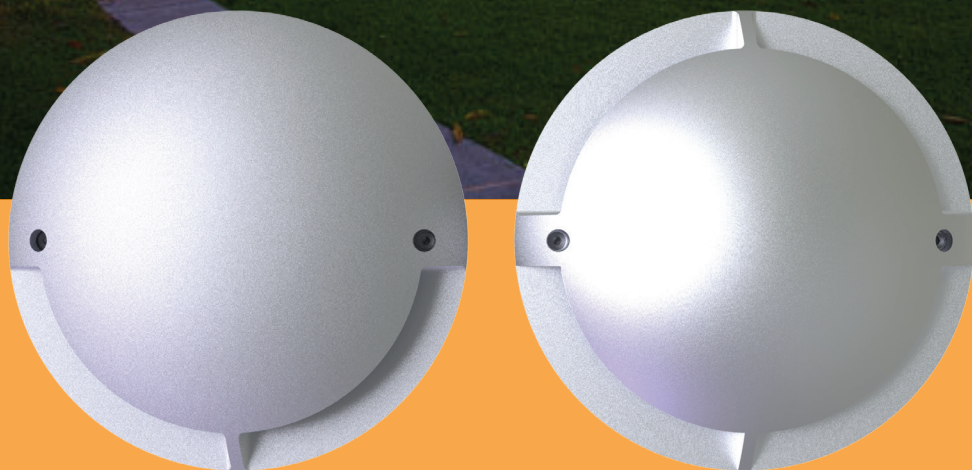

Mona-Series

Walkways & Traffic Areas with in-ground Light

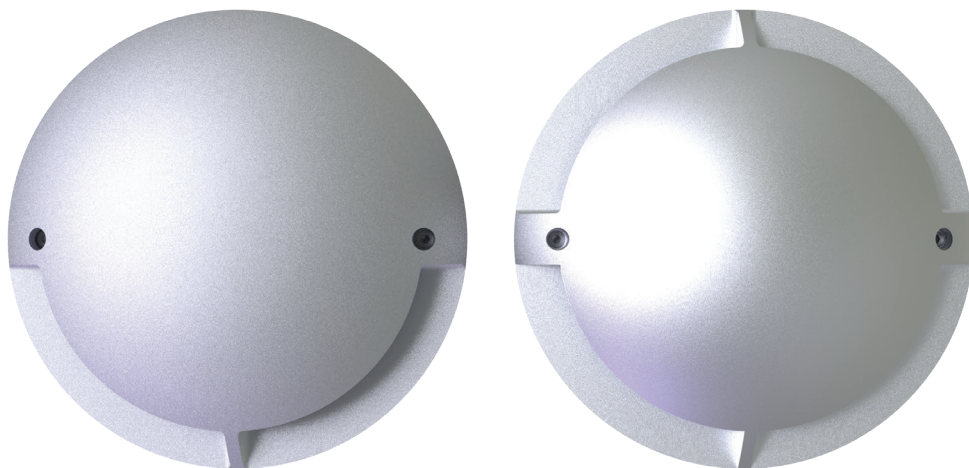


- Code Product: Mona-Series
- Dimension: L (Ø196 x 86mm); M (Ø158 x 75mm)
- Input Voltage: 24VDC/110-240VAC (43-60Hz)
- Power consumption: M (8-12W) L (15- 20W)
- Luminous Flux: 780Lm at 2 Doors 3000K, 15W
- Brand of LEDs: LED CREE
- Color: 3000K- CRI: >80 (Red, Green, Blue, 2200-6000K)
- Beam Angle: Special
- Function: Option
- Material: Aluminium
- Finishing (Color housing): Anodizing Topology
- IP Class: 67
- IK Class: 10
- Class: III for 24VDC, I for 110-240VAC

- LED lifetime: 50.000hrs
- Standards:
 - +EMC protection
 - +IEC 62031 LED modules for general lighting Safety specifications
 - +IEC 60598 Luminaires – Parts 1+2: General requirements particular requirements and tests
















Pending

IP67

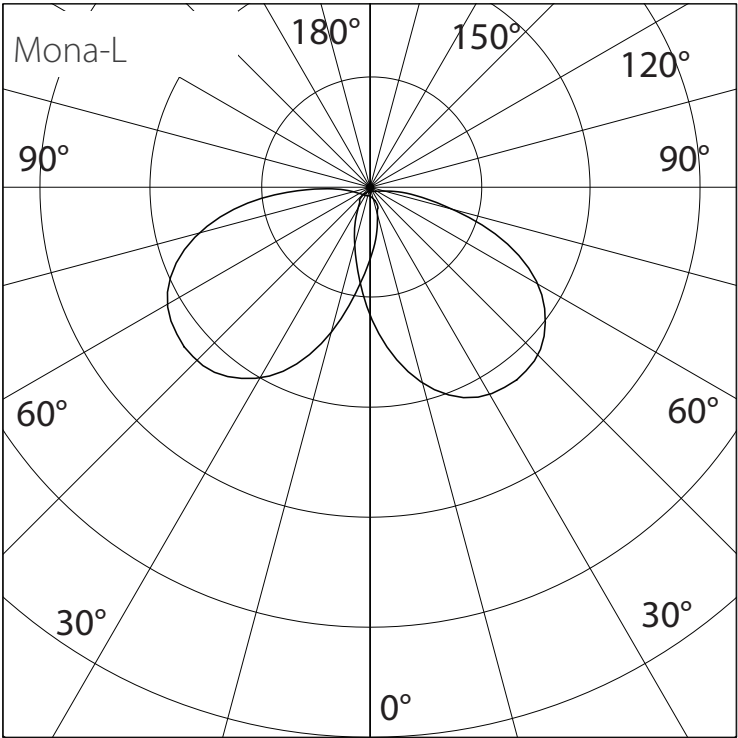


780Lm at 2 Doors 3000K, 15W


Product Description	
Control Gear	Fairchild Technology
LED Module	High-power LEDs on metal-core PCB. Collimating lens made of optical polymer/pmma
Anti-Glare	Option
Electrical Protection	EMC, inrush current
Electrical Class	1

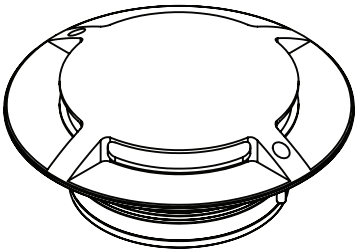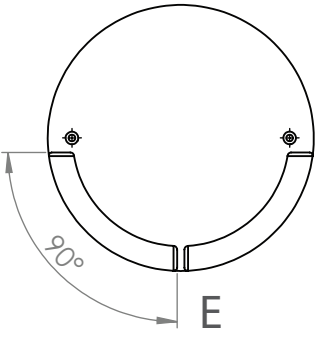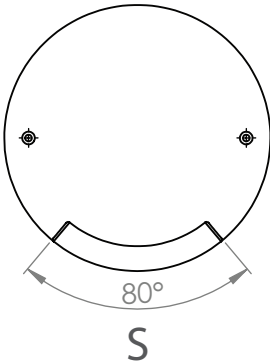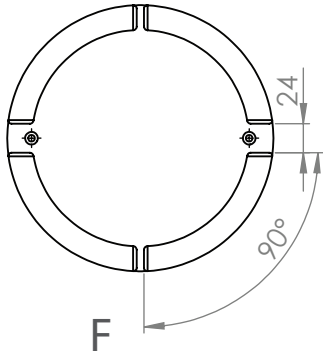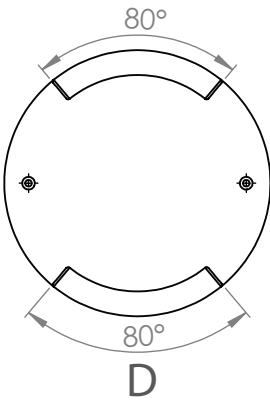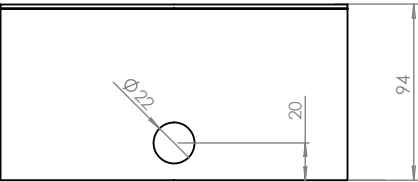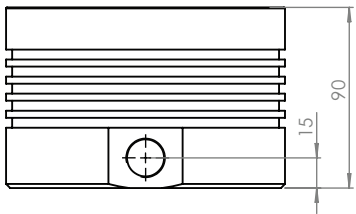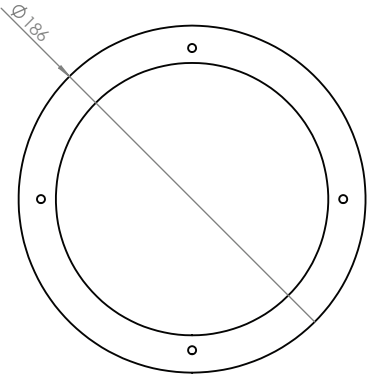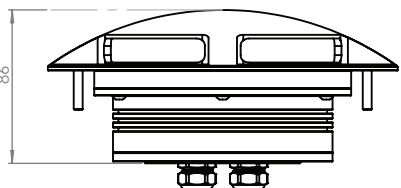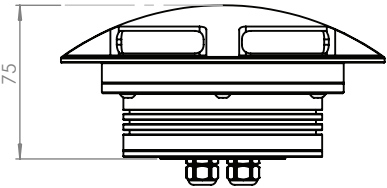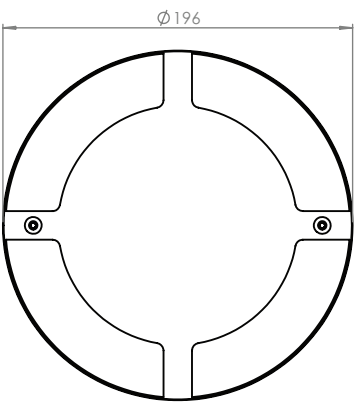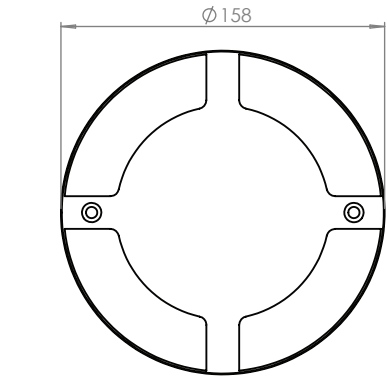


1

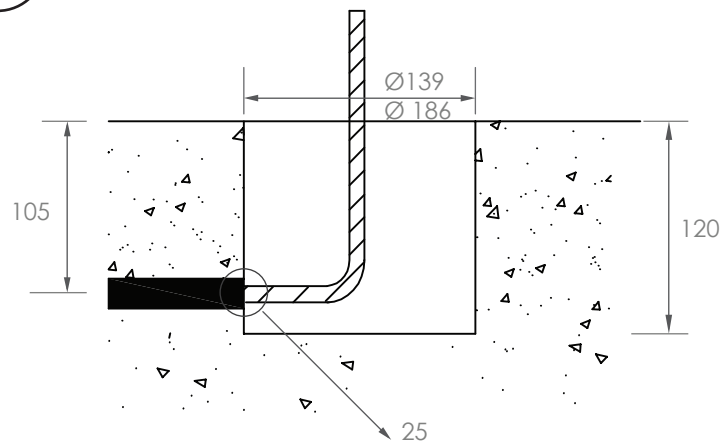

2

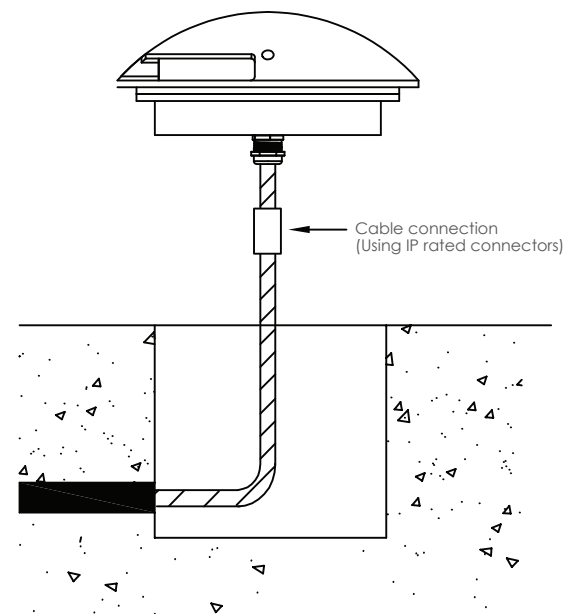

3

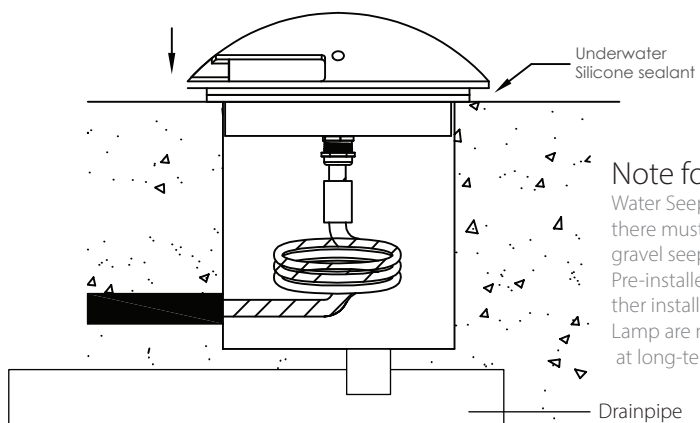

Note for IP67:
Water Seepage layer
there must be more than 20 cm
gravel seepage layer or
Pre-installed drainage pipe under
ther installation position.
Lamp are not suitable for installation
at long-term water soaked position

4

