




Vitus-Series

DriverWay Light



- Code Product: Vitus- Series
- Dimension: Ø88mm x H120mm
- Input Voltage: 24VDC
- Power consumption: 6W Series (Option: 1Door, 2Doors, 3Doors, 4Doors)
- Luminous Flux: 140Lm (70x2) at (3000K, CRI>80) – 2 Door
- Brand of LEDs: LED CREE
- Color: 3000K, CRI>80 (Other color please contact us)
- Beam Angle: 2 x 24°
- Function Dimmer: Option
- Material: Body: Aluminum; Face: Stainless 316
- Finishing (Color housing): Stainless
- Electrical Class: I
- IP Class: 67
- IK Class: 10

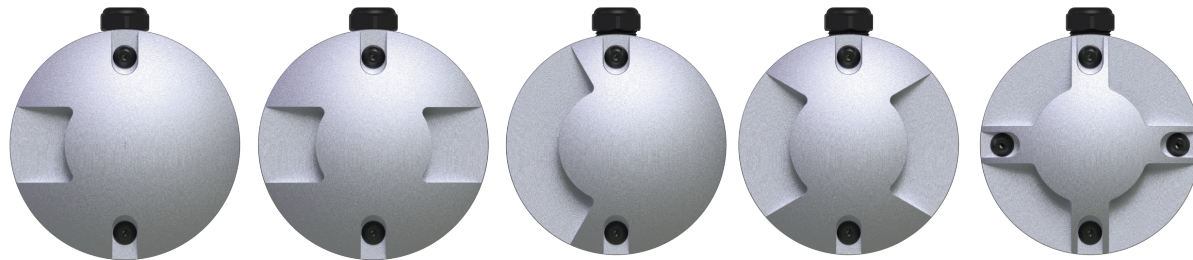


- LED lifetime: 50.000hrs
- Lens: Clear
Cellular
Sand
- Standards:
 - +EMC protection
 - +IEC 62031 LED modules for general lighting Safety specifications
 - +IEC 60598 Luminaires – Parts 1+2: General requirements particular requirements and tests

Material PMMA
with UV protection








Pending

IP67

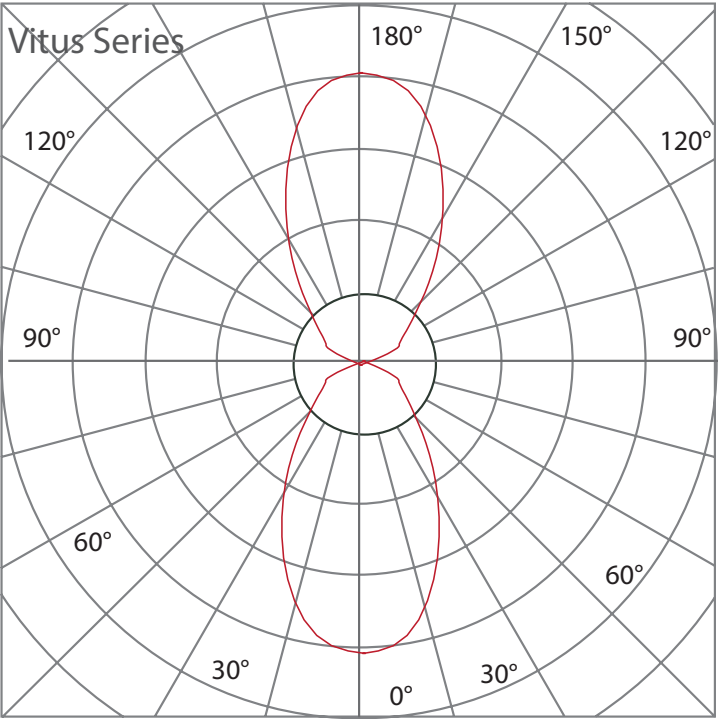


2x70Lm at 3000K


Product Description	
Control Gear	Fairchild Technology
LED Module	High-power LEDs on metal-core PCB. Collimating lens made of optical polymer/pmma
Anti-Glare	Option
Electrical Protection	EMC, inrush current
Electrical Class	3

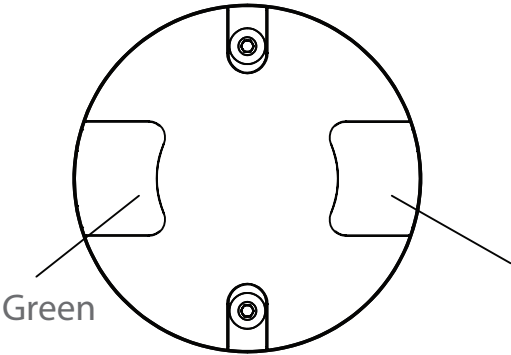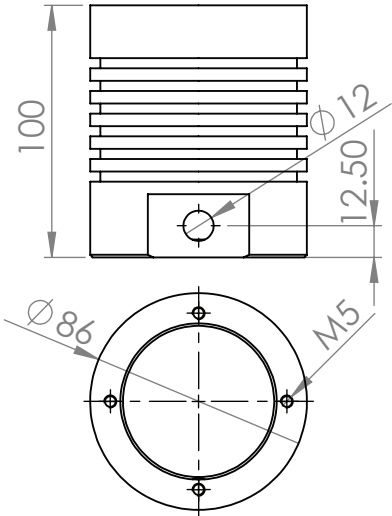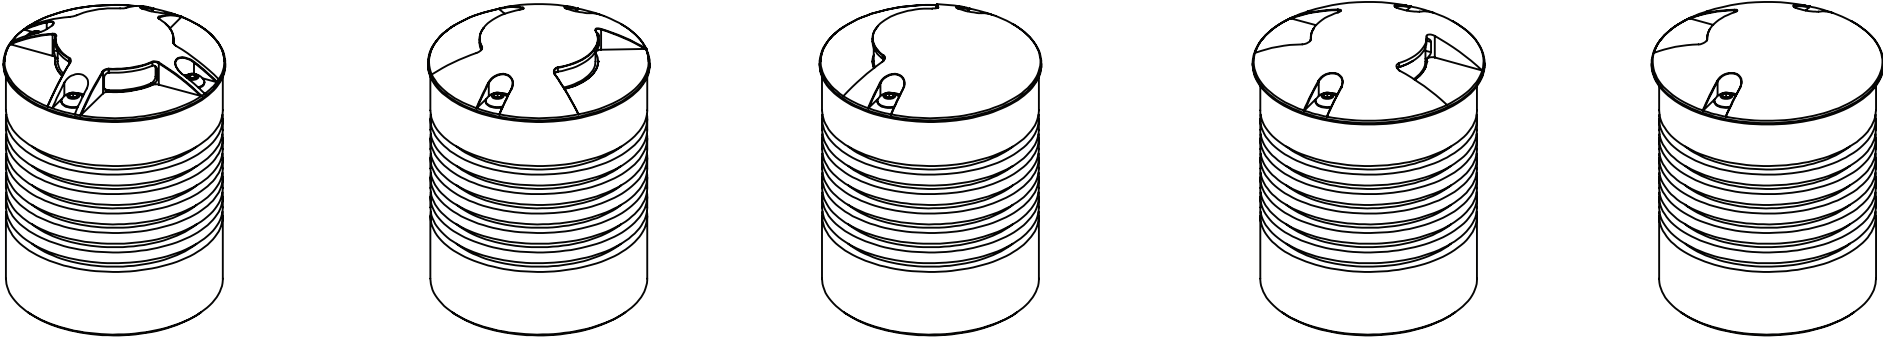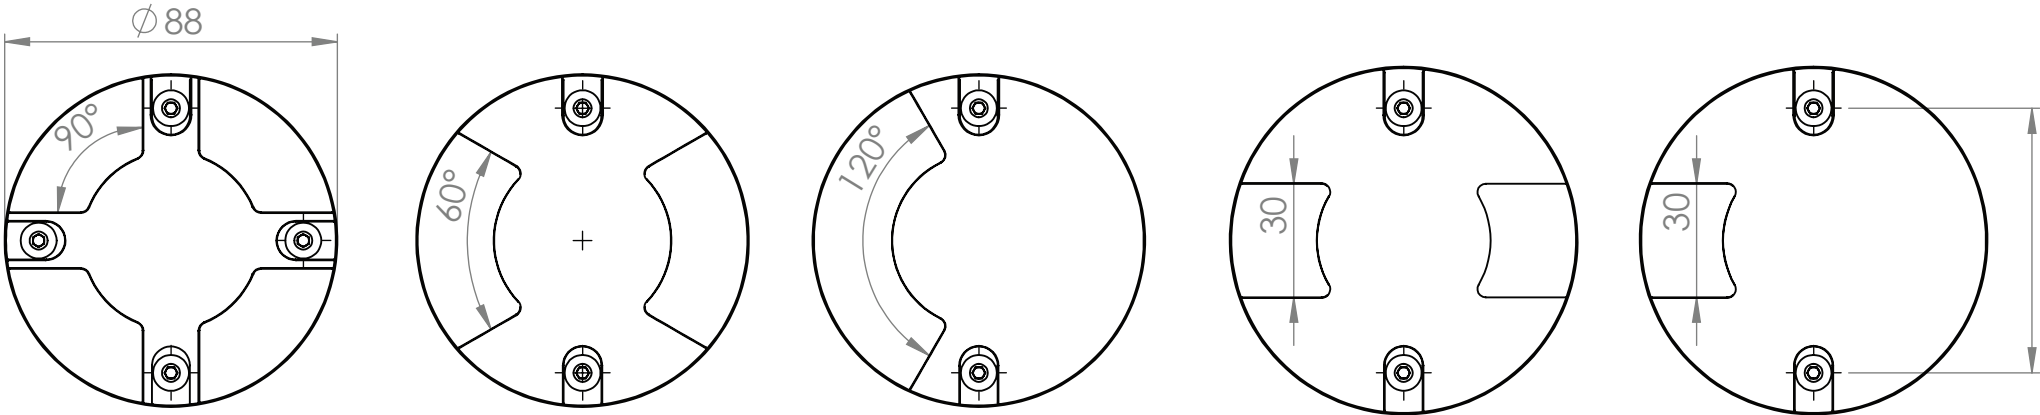


Special Application: (Driver Way)
Door 1 - 1.6W red
Door 2 - 2.2W Green
Control: DMX512 with
Auto Setting (iDMX512)
14Bits Resolution - 2 channels
Red

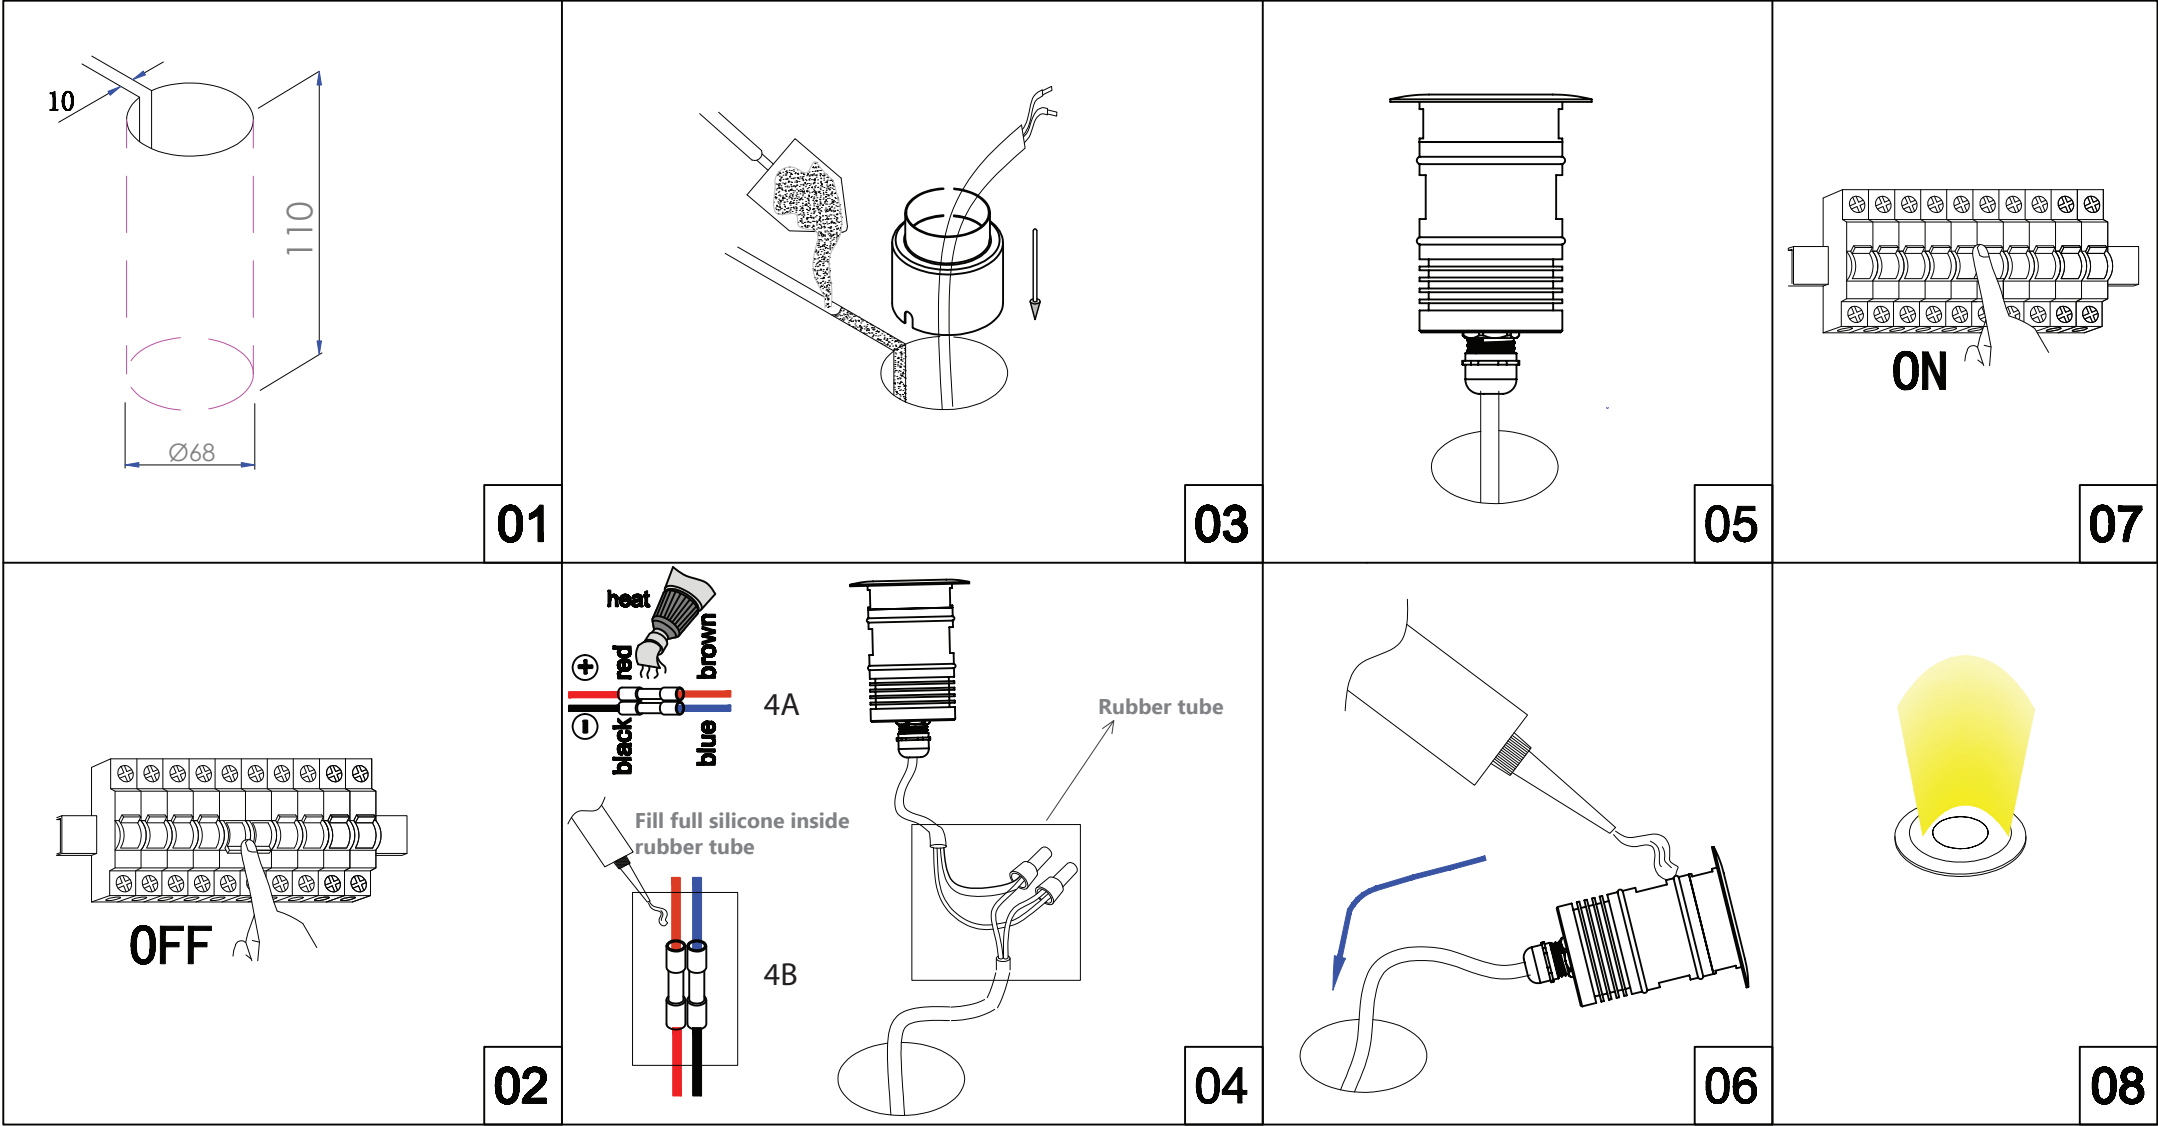


1

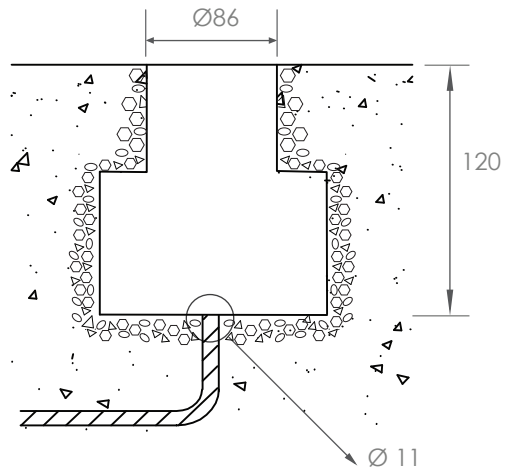


2

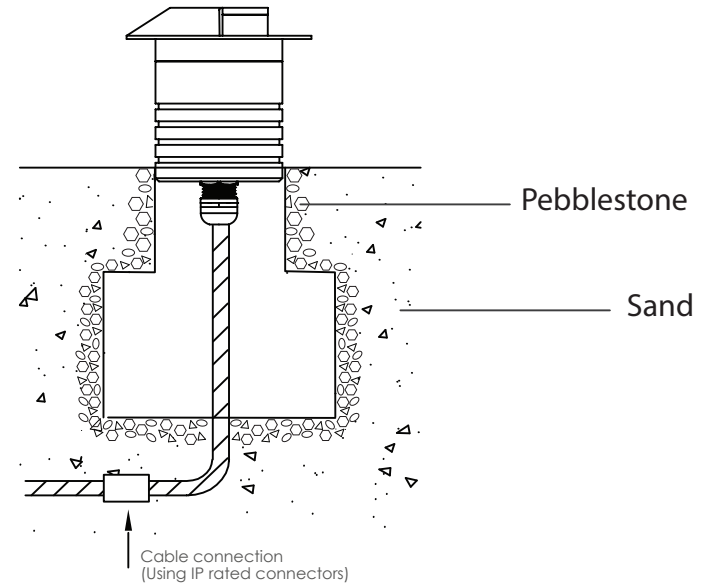


3

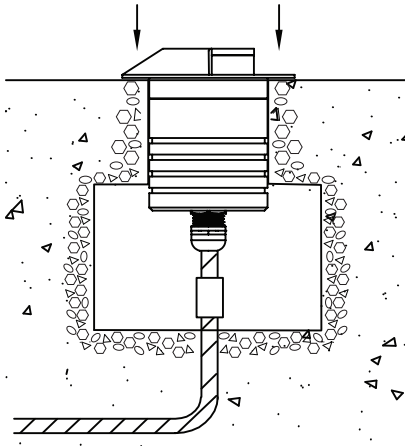

4

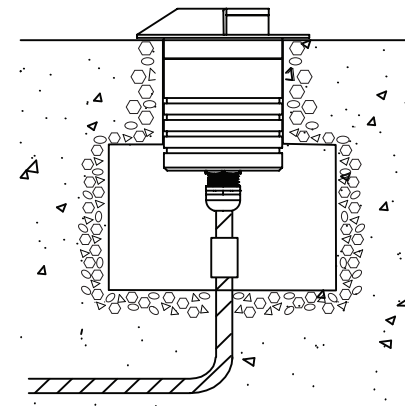

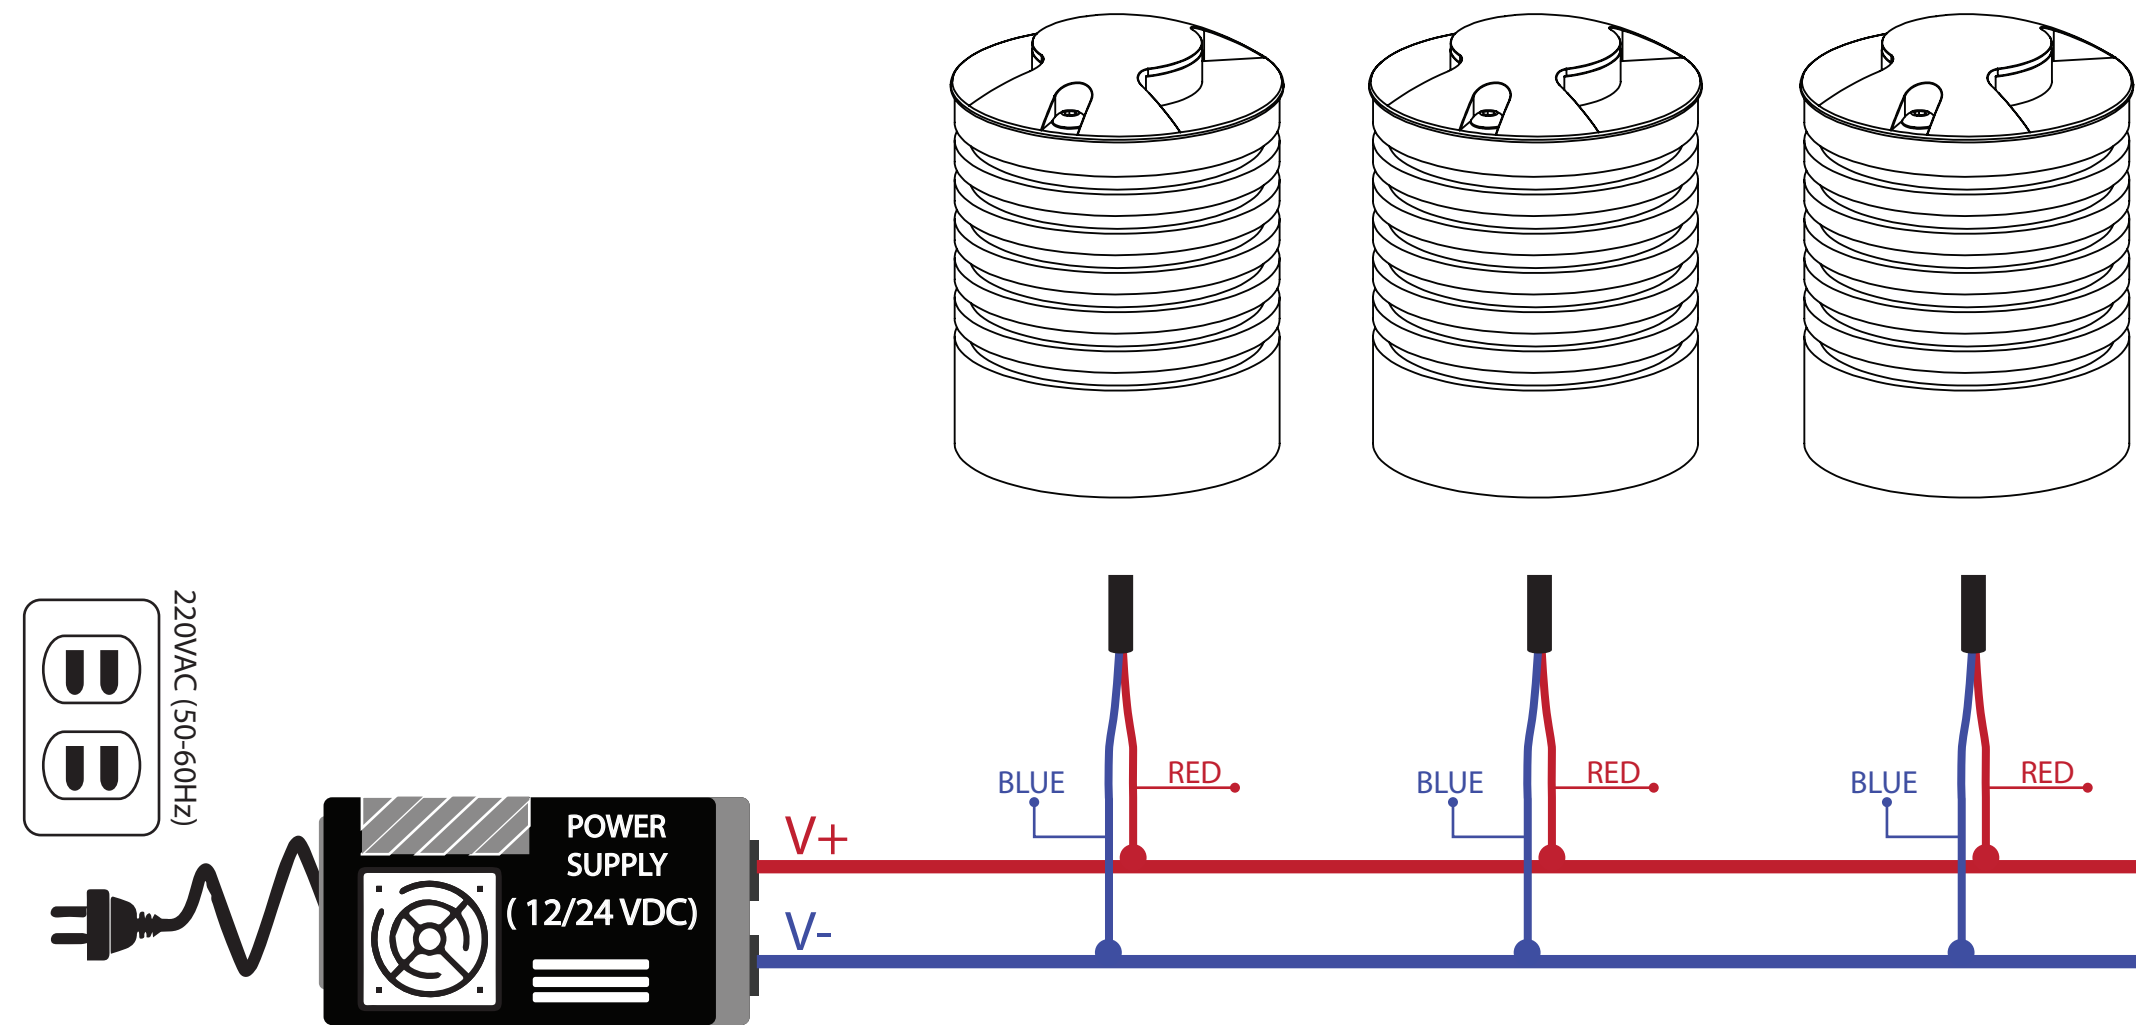

220VAC (50-60Hz)

