




Kail-Series
Wall Luminaires Surface Mounted

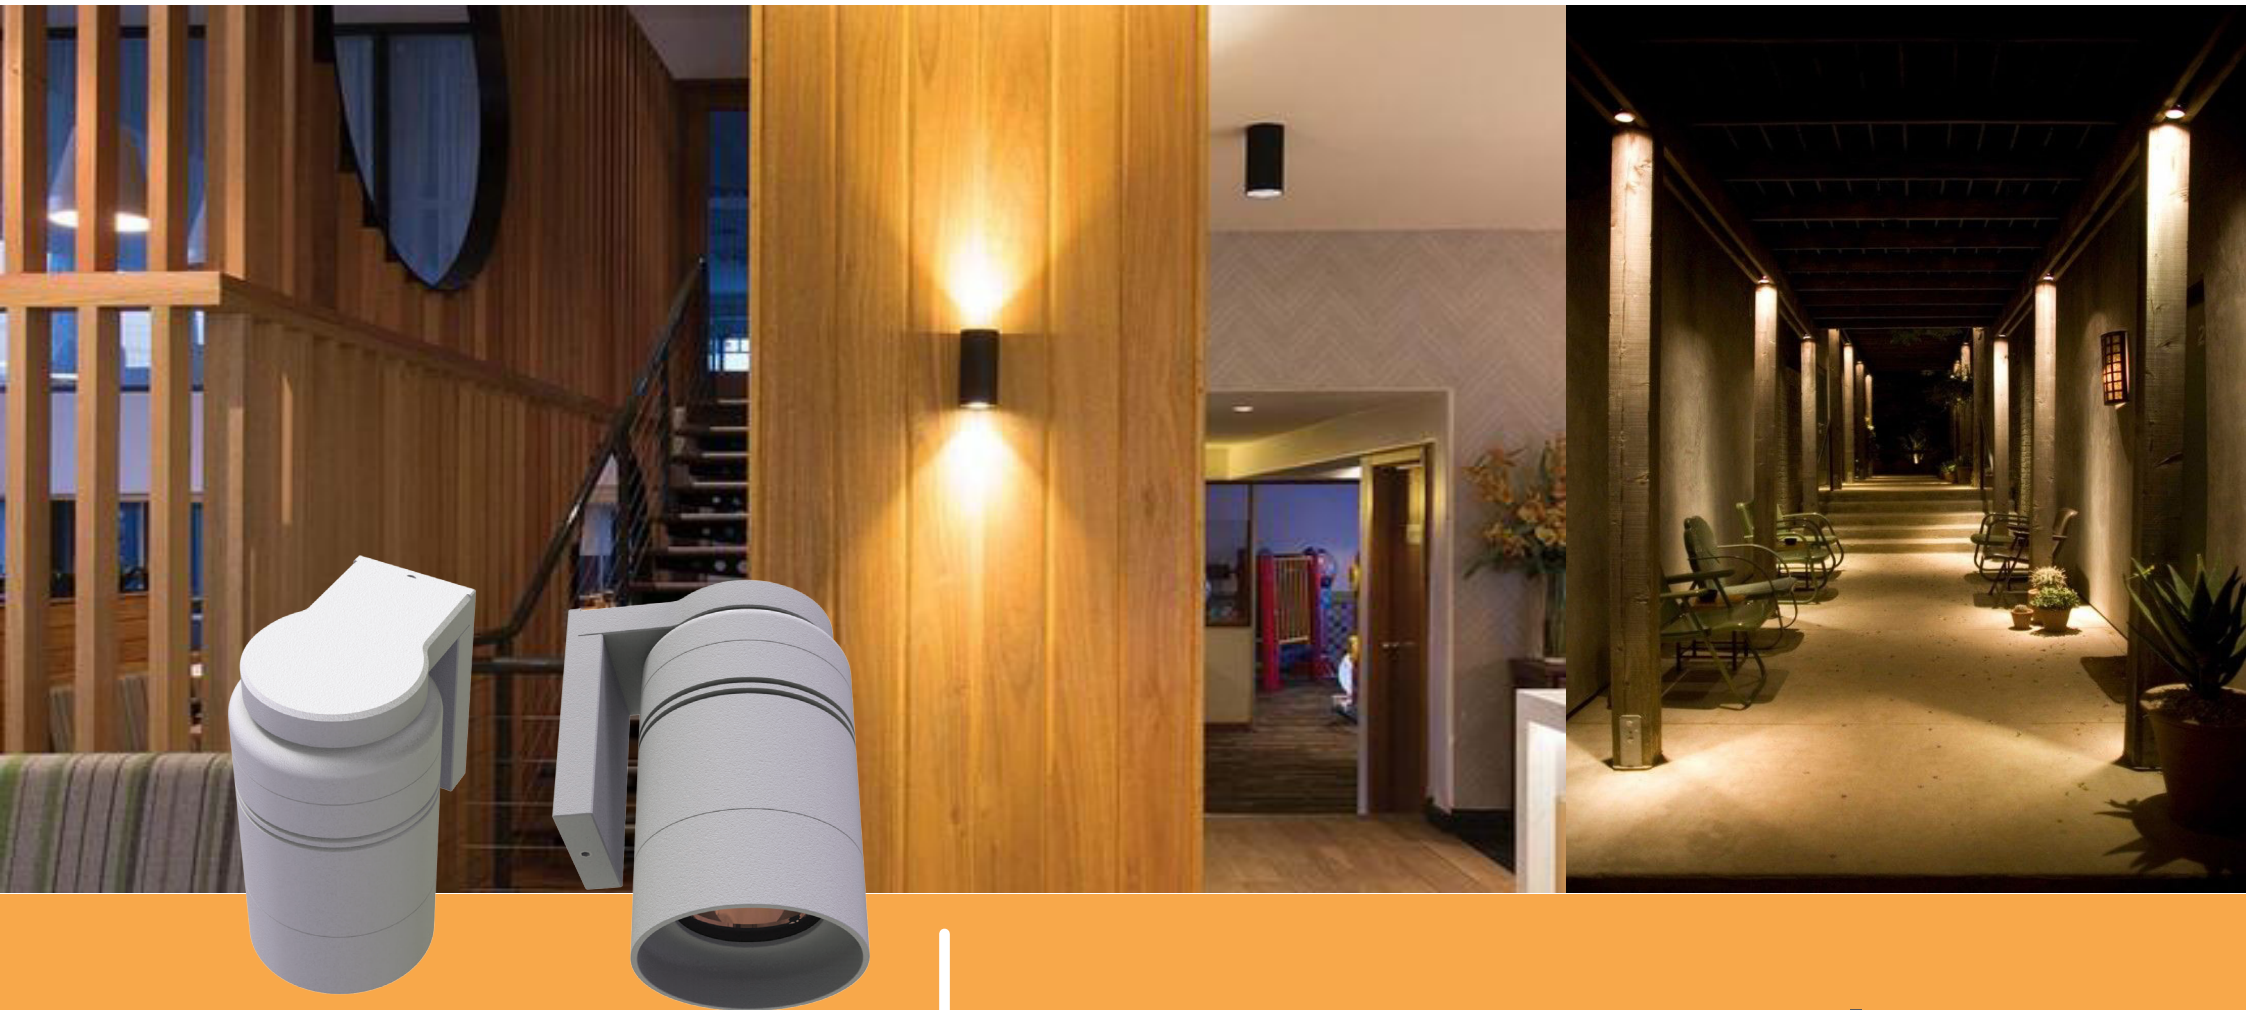

- Code Product: Kail-Series
- Dimension: S(Ø62x110); M(Ø68x120); L(Ø88x130)
- Input Voltage: 110-240VAC (43-60Hz)
- Power consumption: S(4-6W); M(7-15W); L(20-30W)
- Luminous Flux: 1984Lm x 3000K at Kail-M (20W)
- Brand of LEDs: LED CREE
- Color: 3000K - CRI: >80
- Beam Angle: 24° (12°, 24°, 36°, 45°, 60°)
- Function Dimmer: None
- Material: Aluminium
- Finishing (Color housing): Anodizing
- IP Class: 65
- Electrical Class: I


- LED lifetime: 50.000hrs
- Lens: Clear
Cellular
Sand
- Standards:
 - +EMC protection
 - +IEC 62031 LED modules for general lighting Safety specifications
 - +IEC 60598 Luminaires – Parts 1+2: General requirements particular requirements and tests

Material PMMA
with UV protection



IP 65

Pending

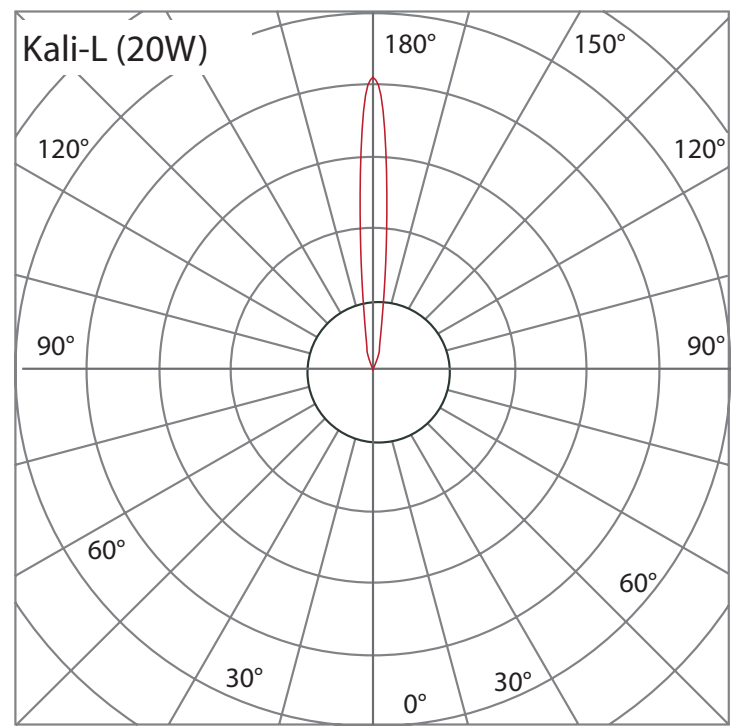

1984Lm x 3000K 24deg

Product Description	
Control Gear	Fairchild Technology
LED Module	High-power LEDs on metal-core PCB. Collimating lens made of optical polymer/pmma
Anti-Glare	Option
Electrical Protection	EMC, inrush current
Electrical Class	1

