




Thov- Series
Lighting for Facade



- Code Product: Thov - Series
- Dimension: S(Ø42x80); M(Ø54x89); L(Ø78x107); X(Ø108x117), XL(Ø118x154)
- Input Voltage: 24-48VDC; 110-240VAC(43-60Hz)
- Power consumption: Series-S(4W, 6W); M(7W, 9W); L(12W, 20W); X(22W, 36W); XL(42W, 72W)
- Luminous Flux: Series
- Brand of LEDs: LED CREE
- Color: 3000K (Single White, Blue Roya), RGB, RGBW
- Beam Angle: 25°(5°, 10°, 15°, 20°, 30°, 45°, 60°, 75°, Esclip)
- Function Dimmer: Option
- Material: Aluminium
- Finishing (Color housing): Anodizing
- IP Class: 66
- Electrical Class: III for 24-48VDC; I for 100-240VAC(43-60Hz)

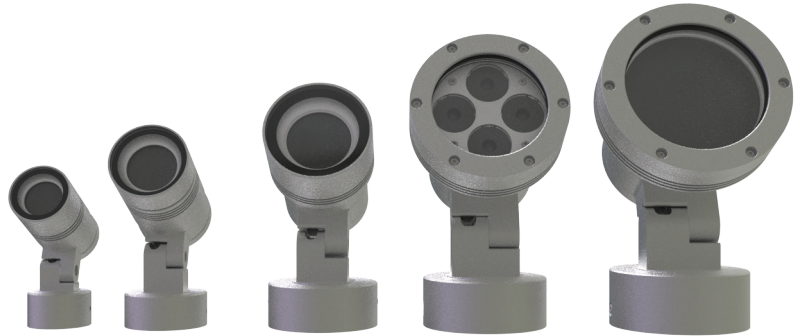

- LED lifetime: 50.000hrs
- Lens: Clear
Cellular
Sand
- Standards:
 - +EMC protection
 - +IEC 62031 LED modules for general lighting Safety specifications
 - +IEC 60598 Luminaires – Parts 1+2: General requirements particular requirements and tests

Material PMMA
with UV protection




IP66







Pending


Technical tolerance: 5%

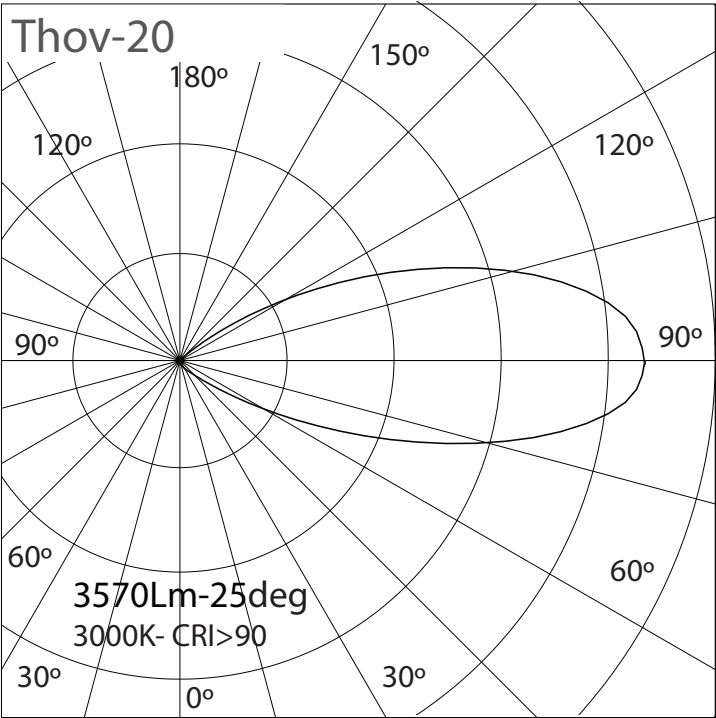



Product Description	
Control Gear	Fairchild Technology
LED Module	High-power LEDs on metal-core PCB. Collimating lens made of optical polymer/pmma
Anti-Glare	Option
Electrical Protection	EMC, inrush current
Electrical Class	1

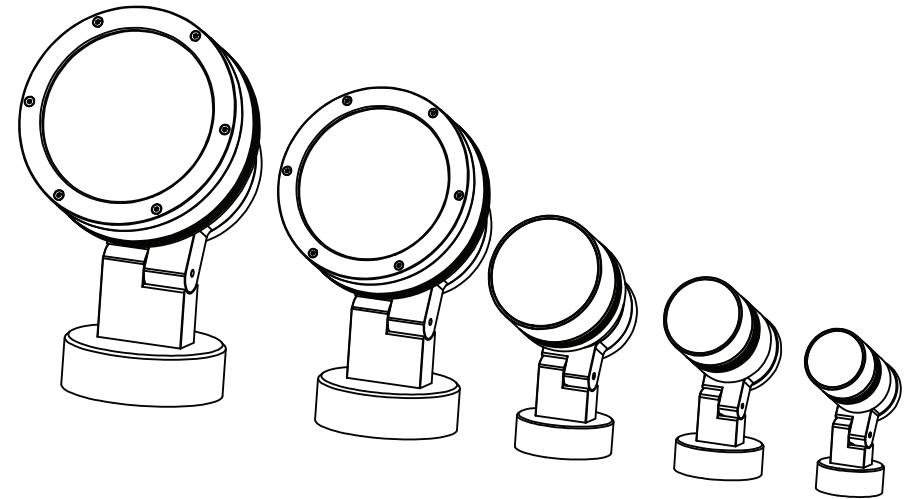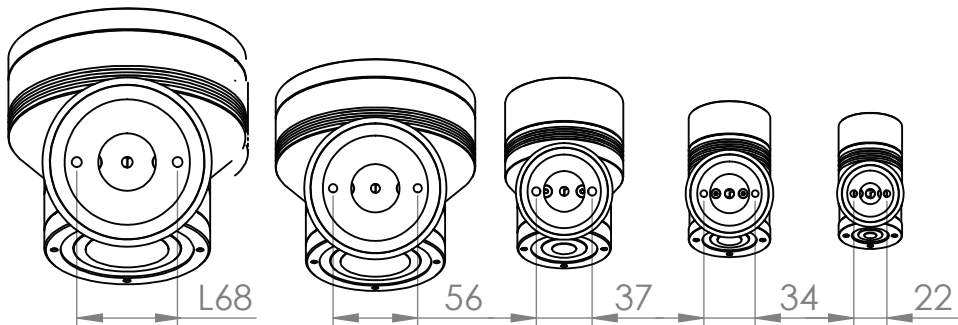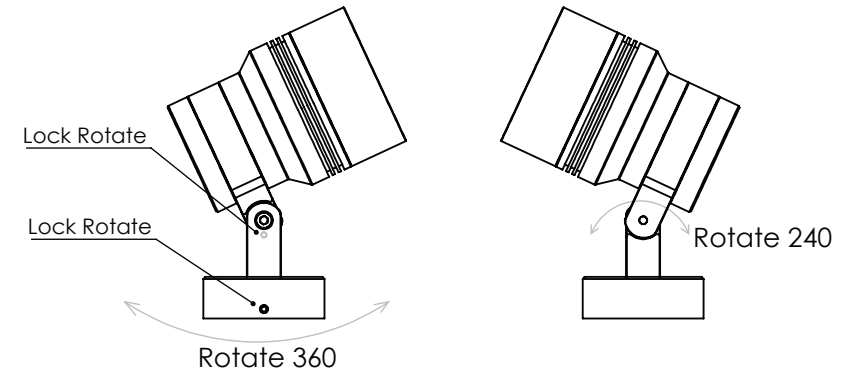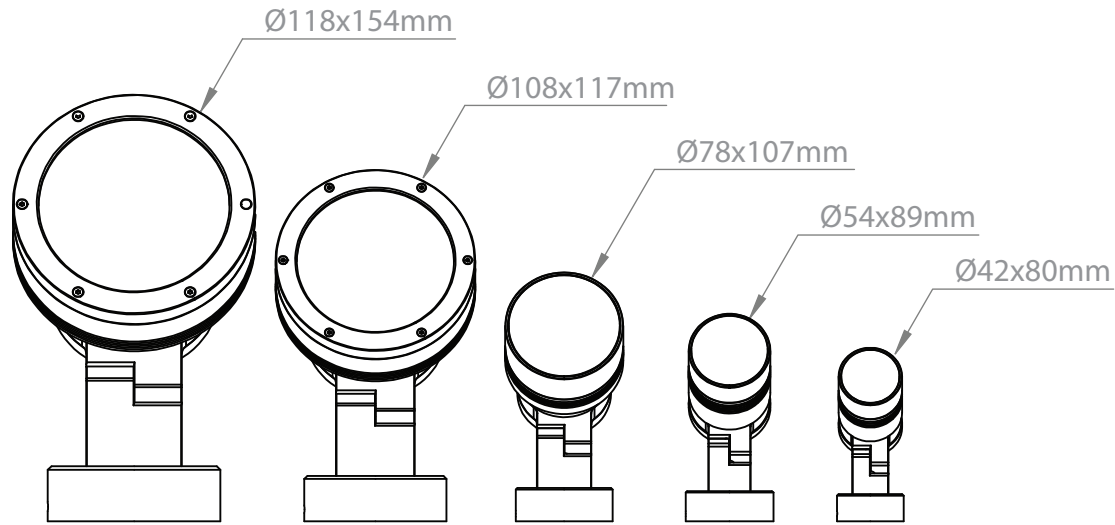


1

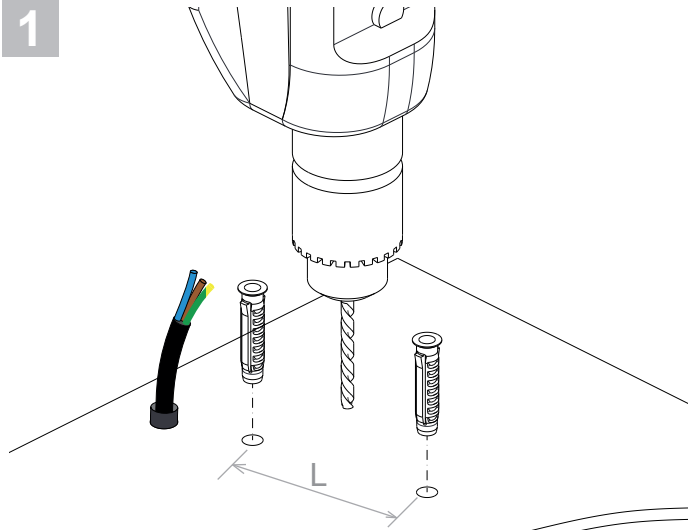

2

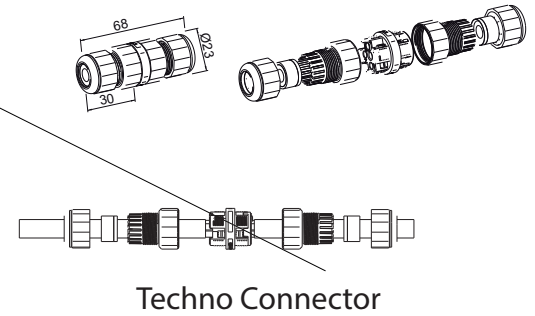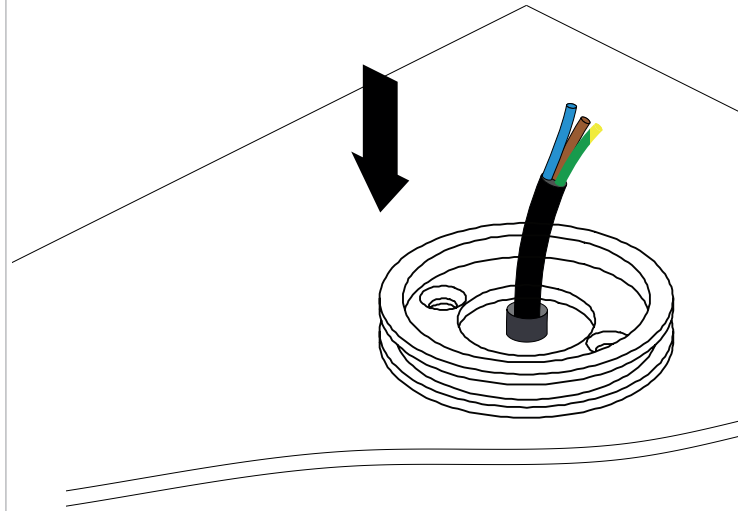

3

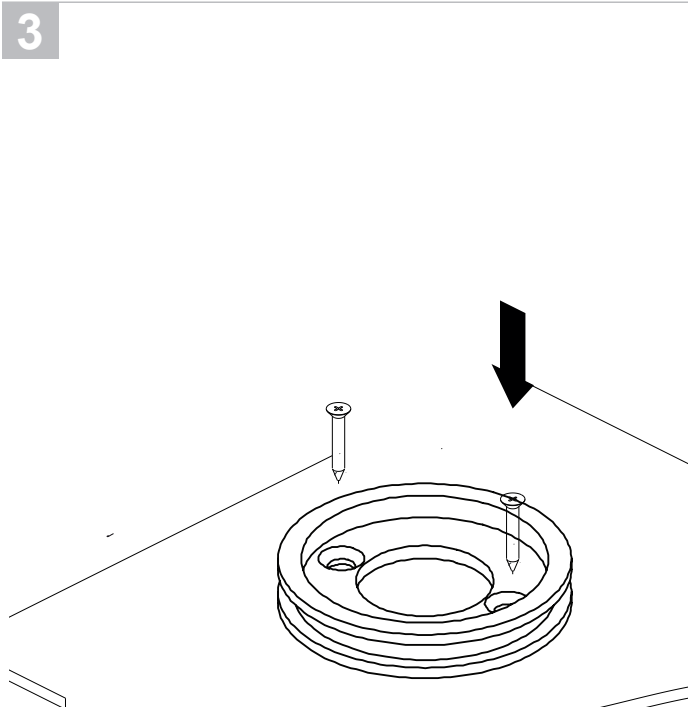

4

