



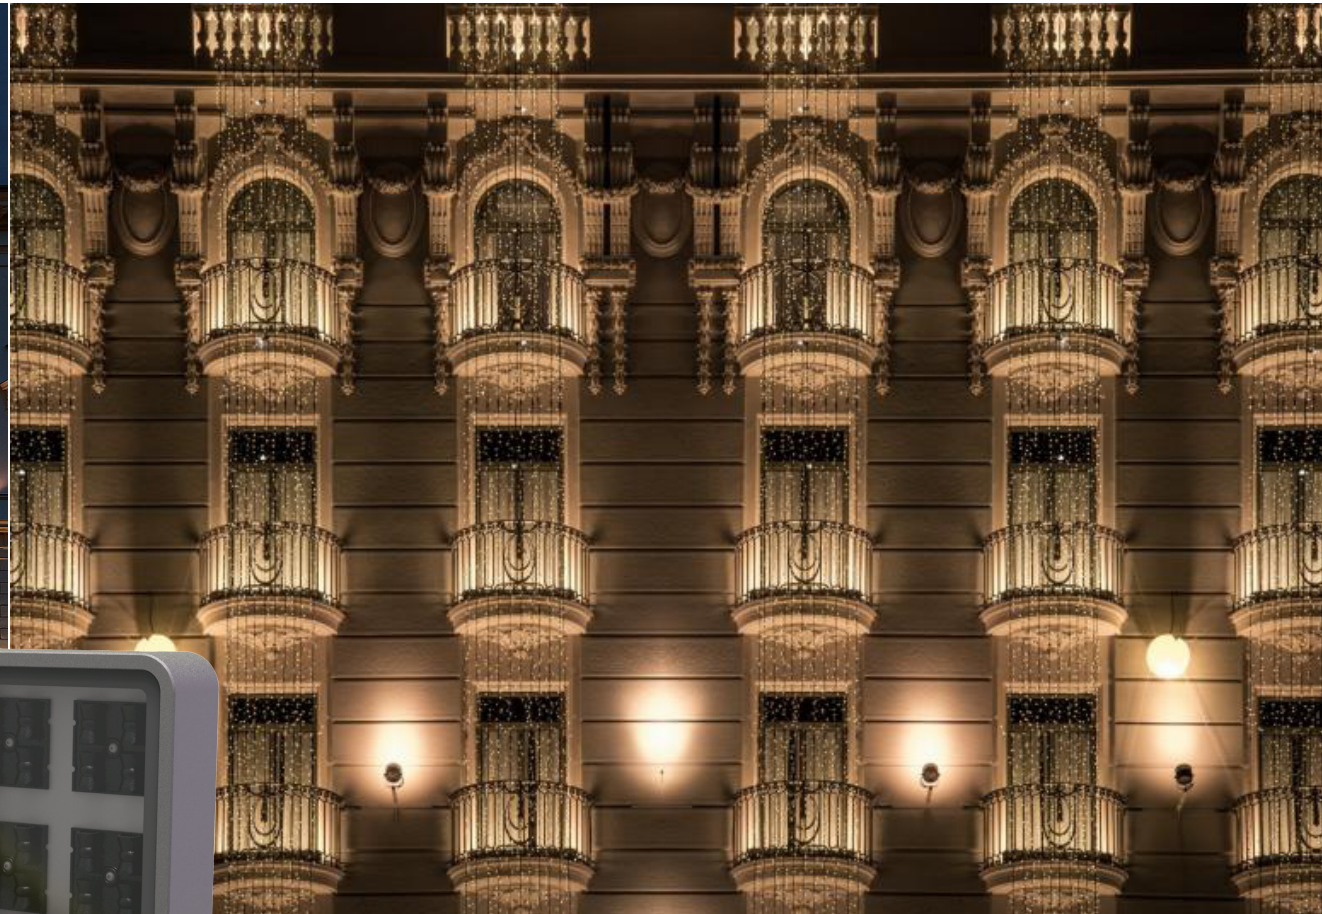

Swan- Series

Architectural Floodlight

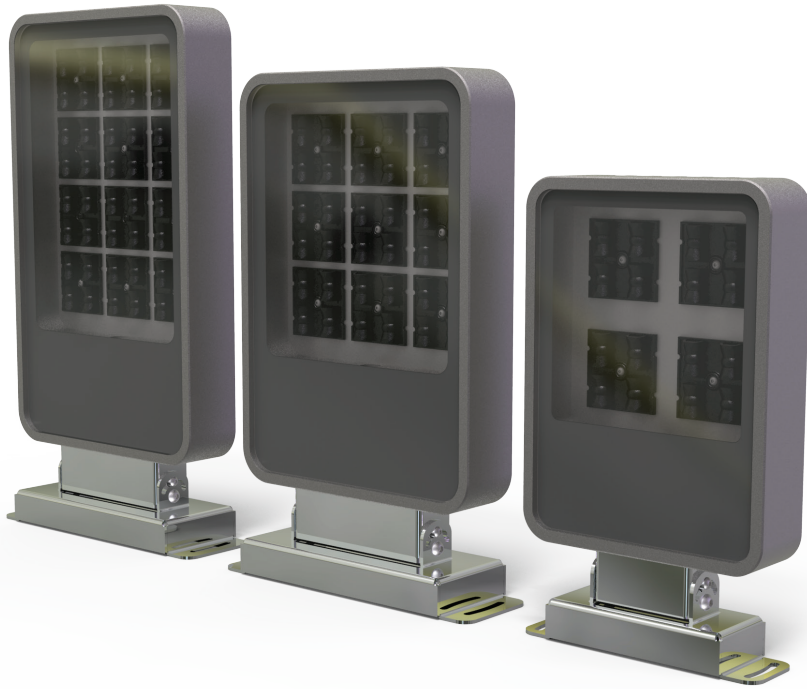

- Code Product: Swan - Series
- Dimension: 4Blocks (48x171x293mm); 9Blocks (48x211x362mm)
12Blocks (48x211x414mm)
- Input Voltage: 24-48VDC; 110-240VAC(43-60Hz)
- Power consumption: 4Blocks (32- 64W); 9Blocks (72- 120W),
12Blocks (108- 240W)
- Luminous Flux: Series
- Brand of LEDs: LED CREE
- Color: 3000K (Single White, Blue Roya), RGB, RGBW
- Beam Angle: 25°(5°, 10°, 15°, 20°, 30°, 45°, 60°, 75°, Esclip)
- Function Dimmer: Option
- Material: Aluminium
- Finishing (Color housing): Anodizing
- IP Class: 66
- Electrical Class: III for 24-48VDC; I for 100-240VAC(43-60Hz)

- LED lifetime: 50.000hrs
- Lens: Clear
Cellular
Sand
Material PMMA
with UV protection
- Standards:
 - +EMC protection
 - +IEC 62031 LED modules for
general lighting Safety specifications
 - +IEC 60598 Luminaires – Parts 1+2:
General requirements
particular requirements and tests




Pending

IP66



Technical tolerance: 5%

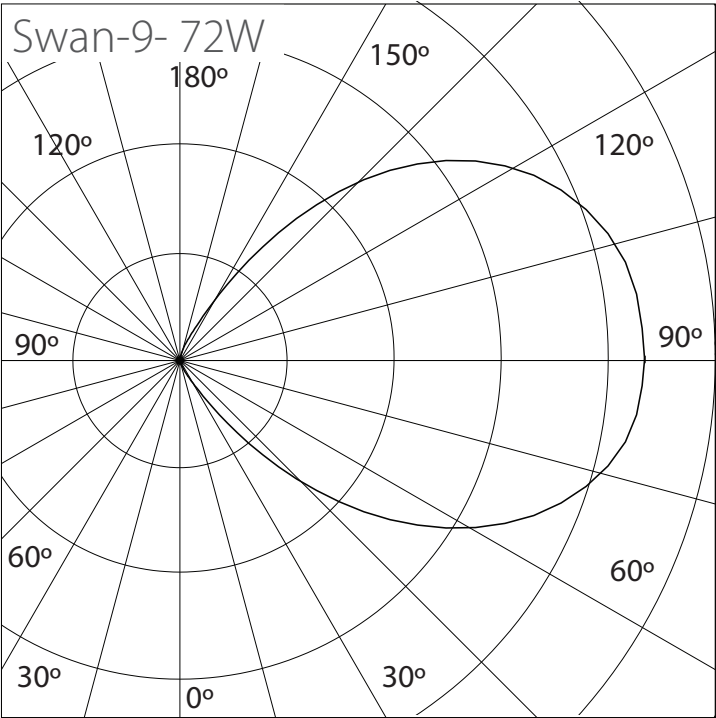

6560Lm-75deg 4000K- CRI>75

Product Description	
Control Gear	Fairchild Technology
LED Module	High-power LEDs on metal-core PCB. Collimating lens made of optical polymer/pmma
Anti-Glare	Option
Electrical Protection	EMC, inrush current
Electrical Class	1

