



Cornly-Series



Ceiling luminaires



- Code Product: Cornly-Series
- Dimension: S(Ø62x103); M(Ø68x103); L(Ø88x141)
- Input Voltage: 48VDC / 110-240VAC (43-60Hz)
- Power Consumption: S(7W, 9W); M(12W, 15W); L(16W, 20W)
- Luminous Flux: 890Lm at 3000K at 9W
- Brand of LED: LED CREE
- Color: 3000K; CRI >90 (2400K-5500K, Single Color)
- Angle: 5°, 10°, 24°, 30°, 36°, 45°, 60°
- Function: Option
- Material: Aluminium
- Finishing (Color housing): Anodizing topology
- IP Class: 65
- Electrical Class: I



- LED lifetime: 50.000hrs
- Standards:
 - +EMC protection
 - +IEC 62031 LED modules for general lighting Safety specifications
 - +IEC 60598 Luminaires – Parts 1+2: General requirements particular requirements and tests




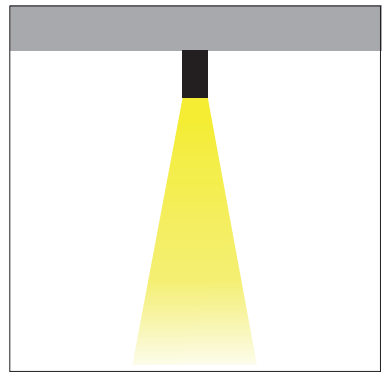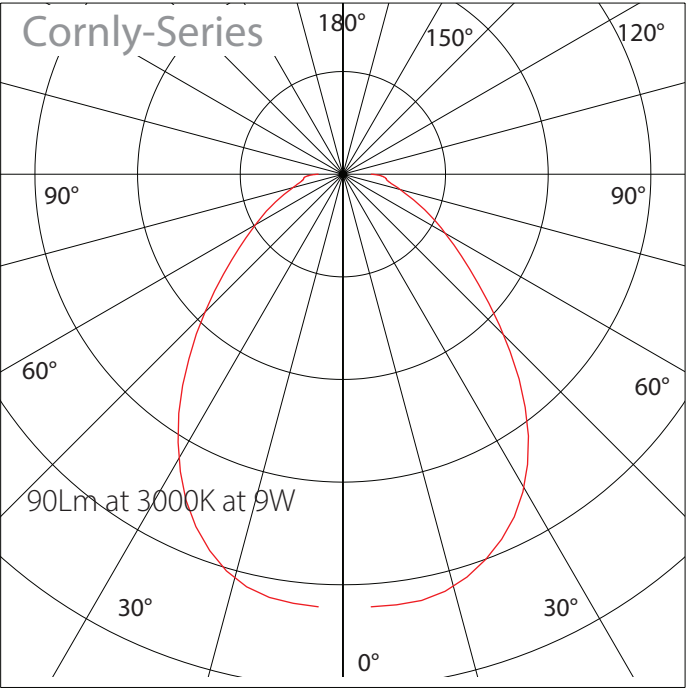


Type: Mount Celling Downlight

Product Description	
Control Gear	Fairchild Technology
LED Module	High-power LEDs on metal-core PCB. Collimating lens made of optical polymer/pmma
Anti-Glare	Option
Electrical Protection	EMC, inrush current
Electrical Class	1

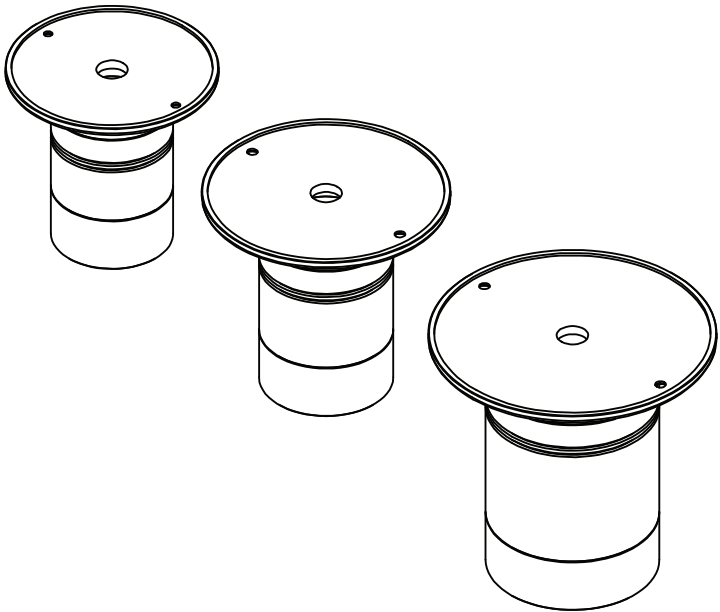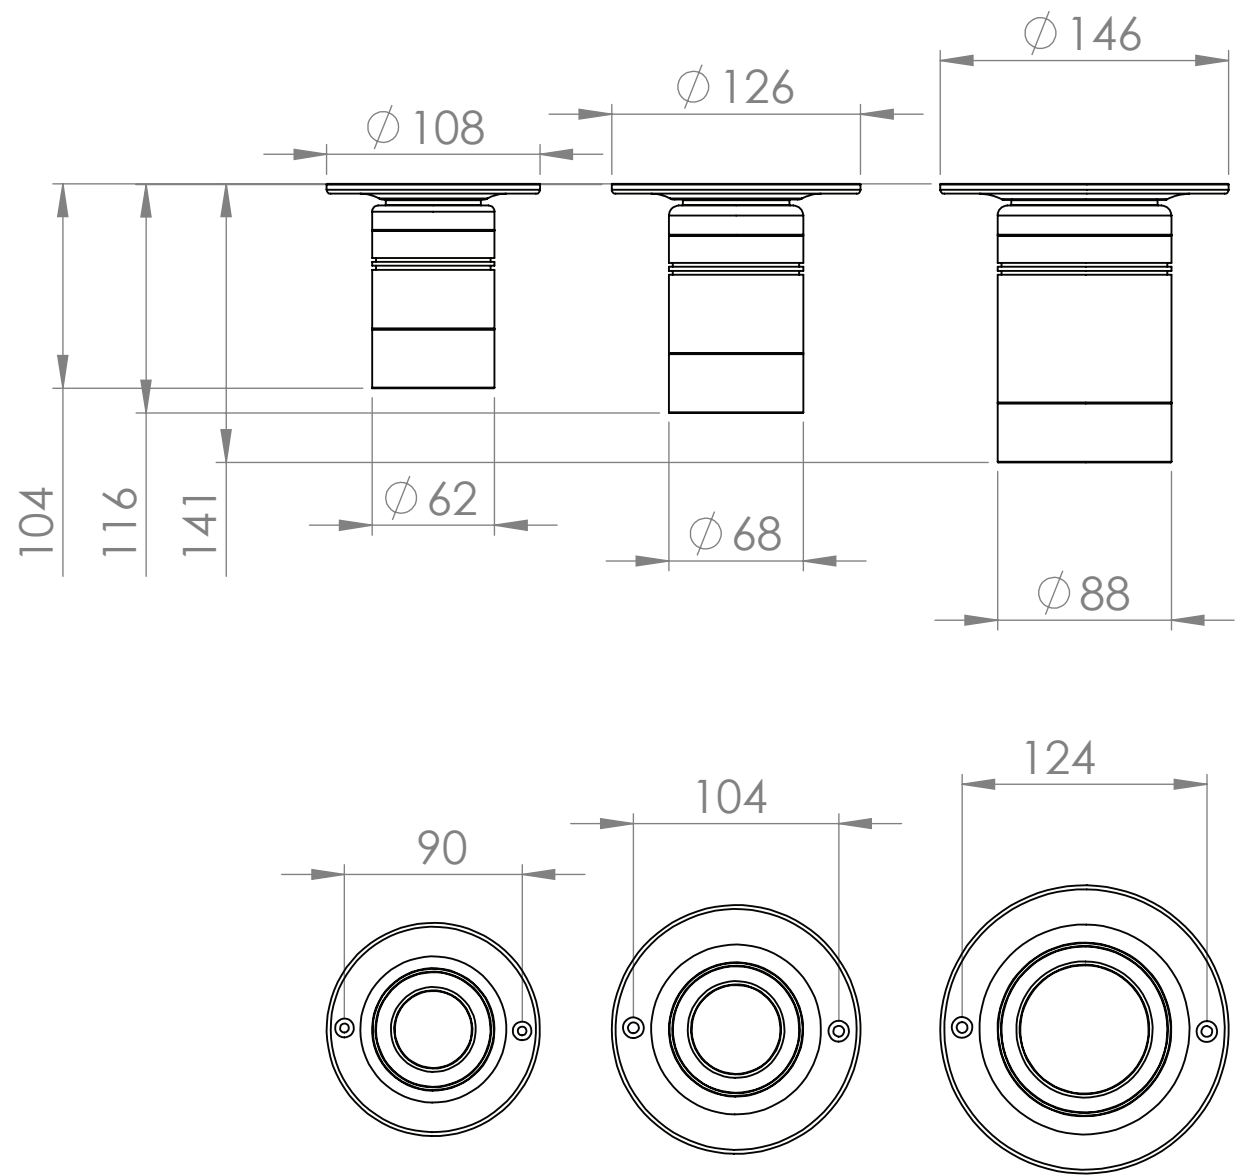

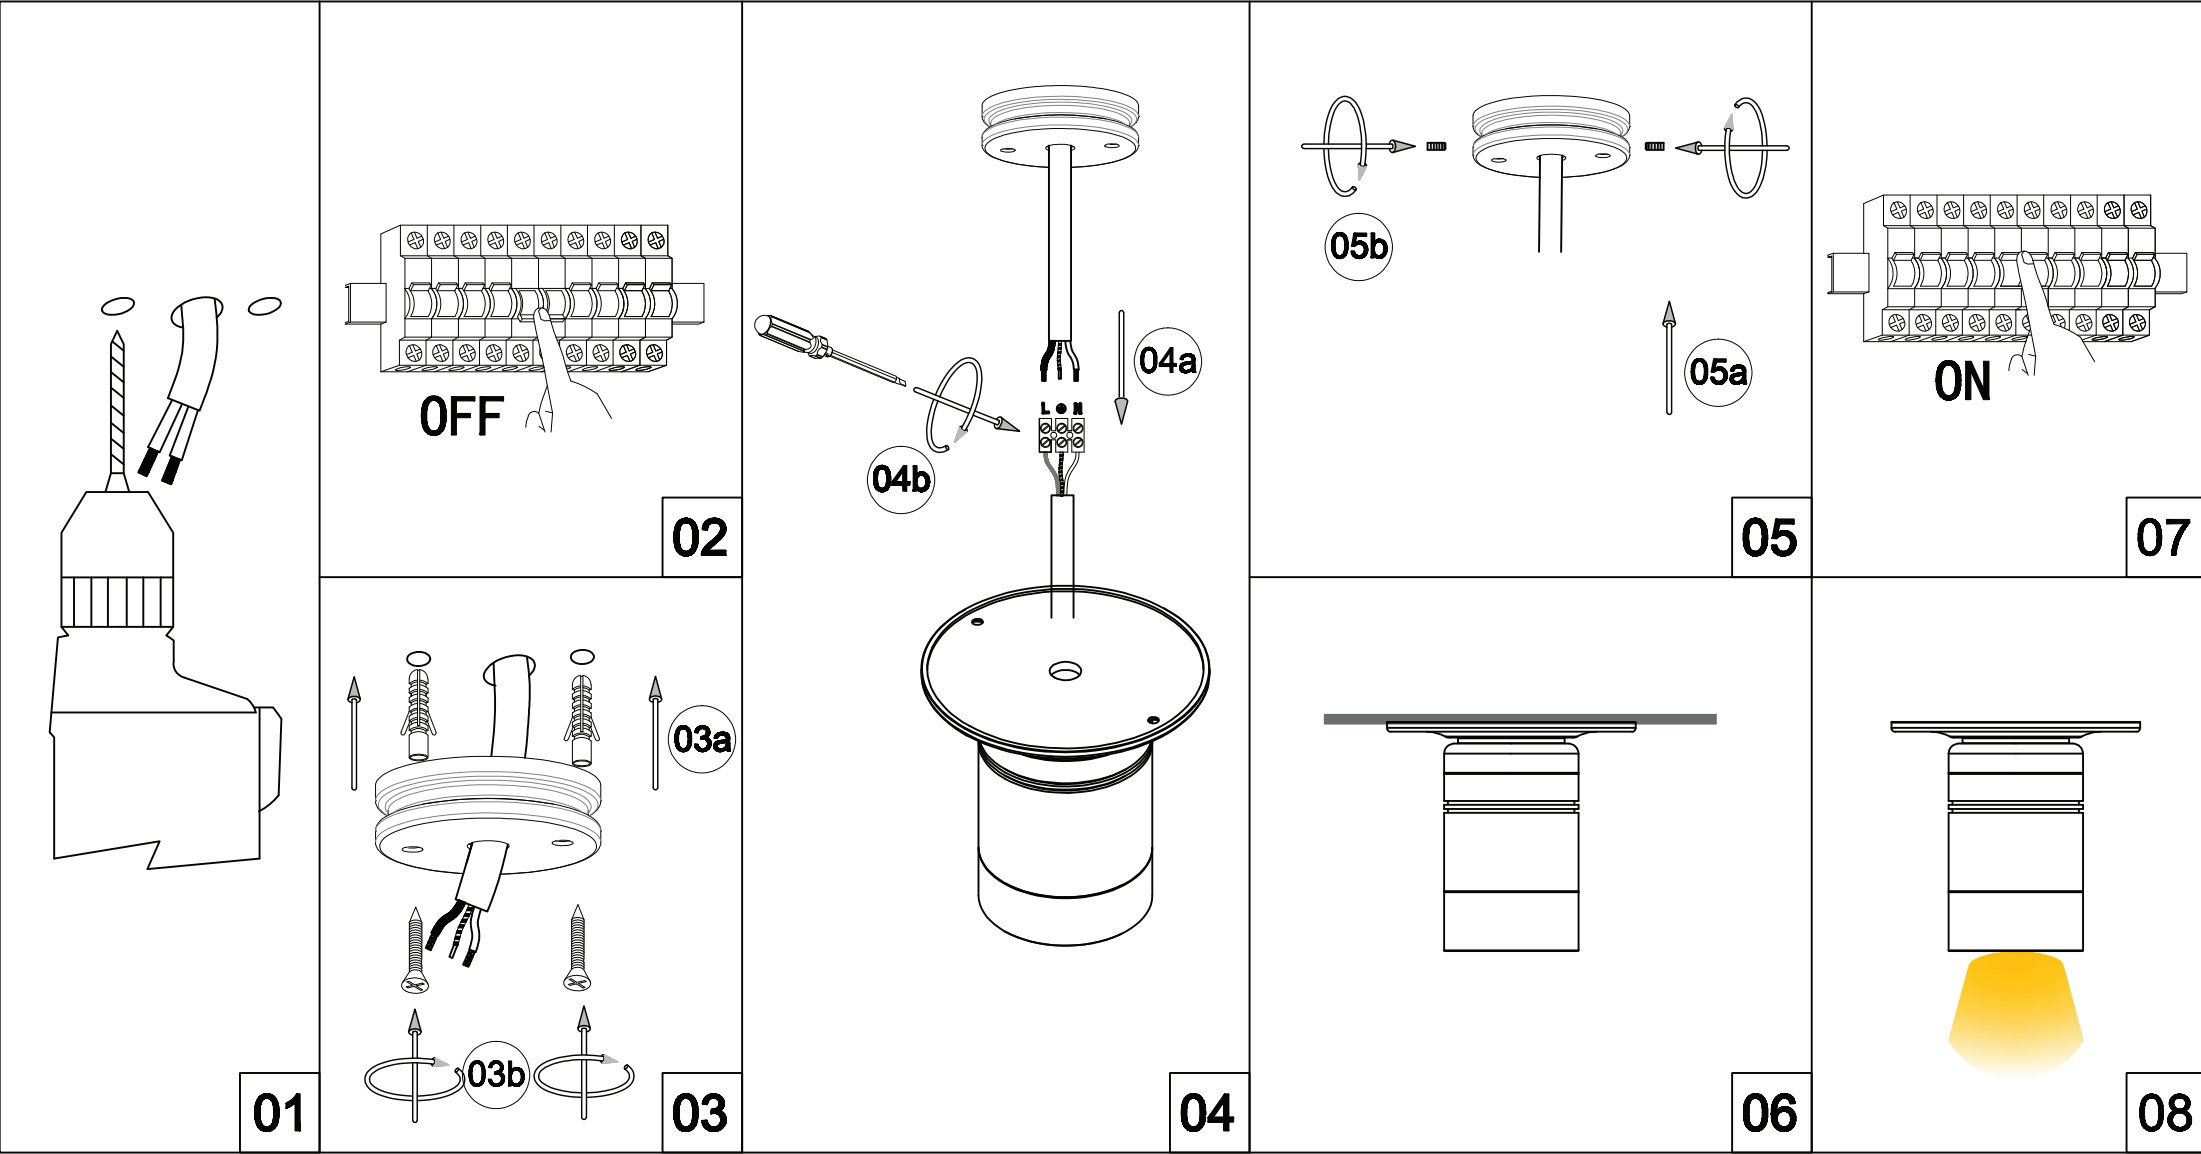


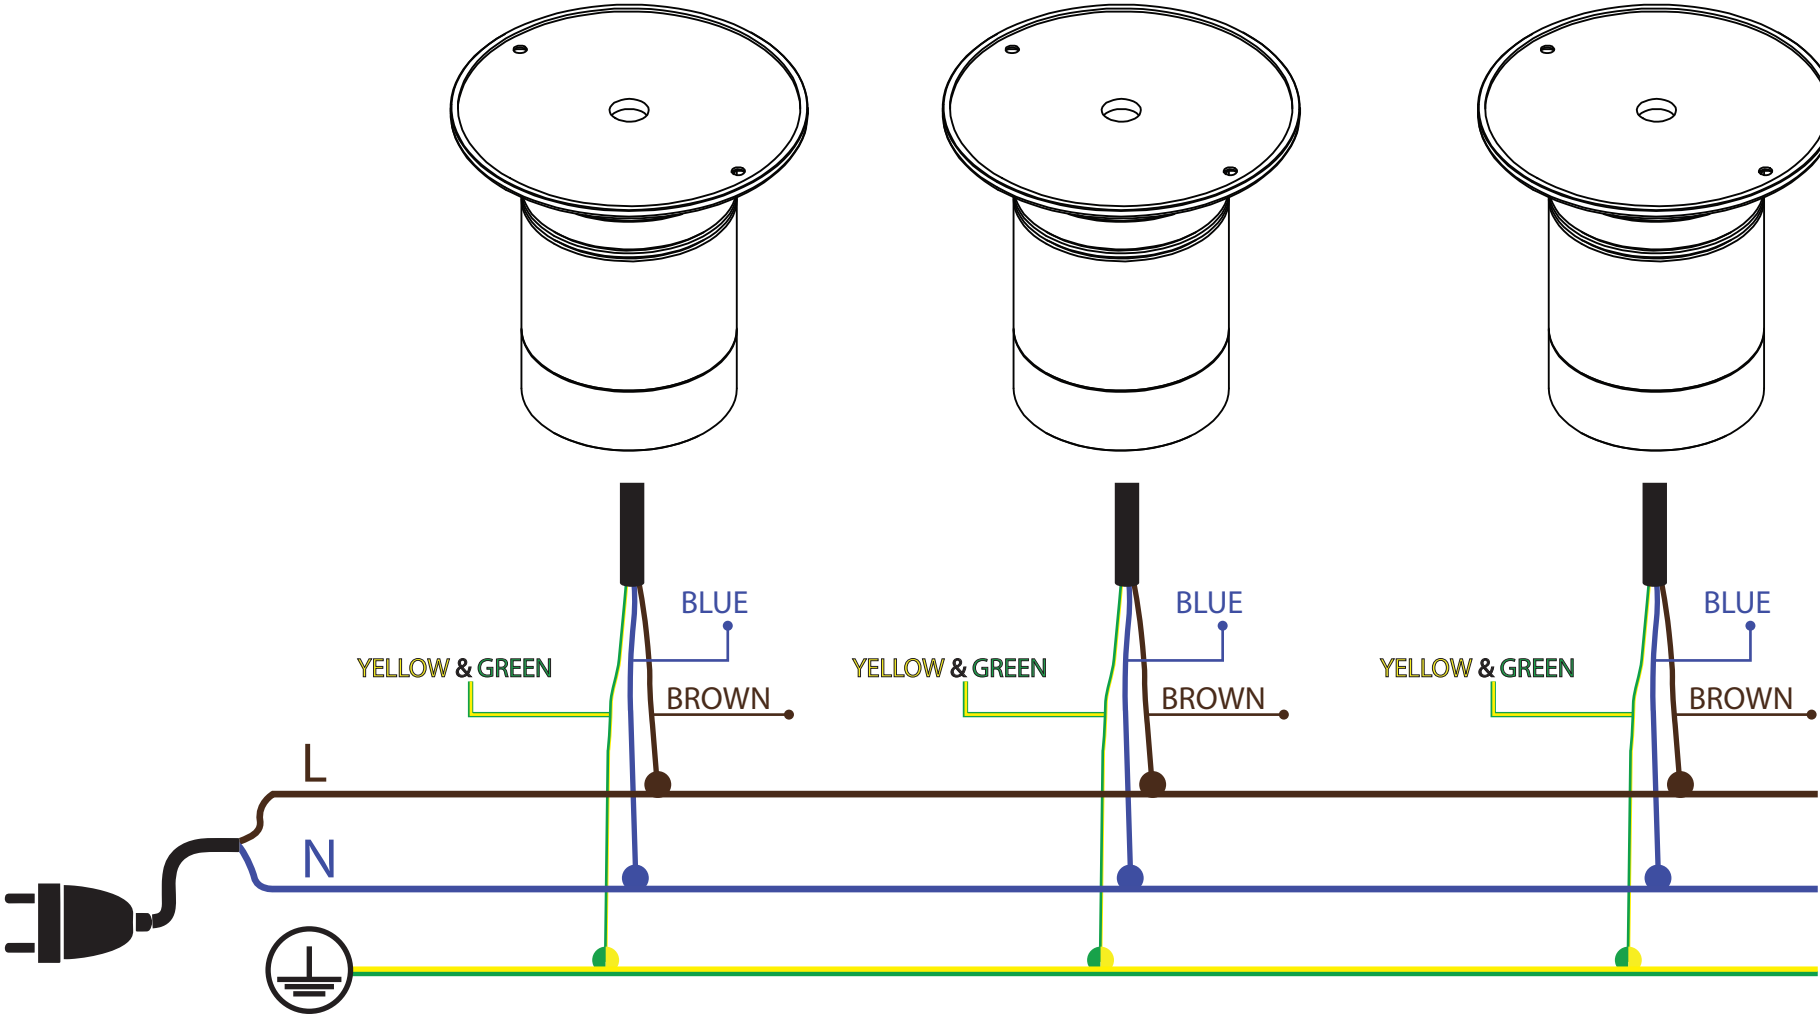





Code Product

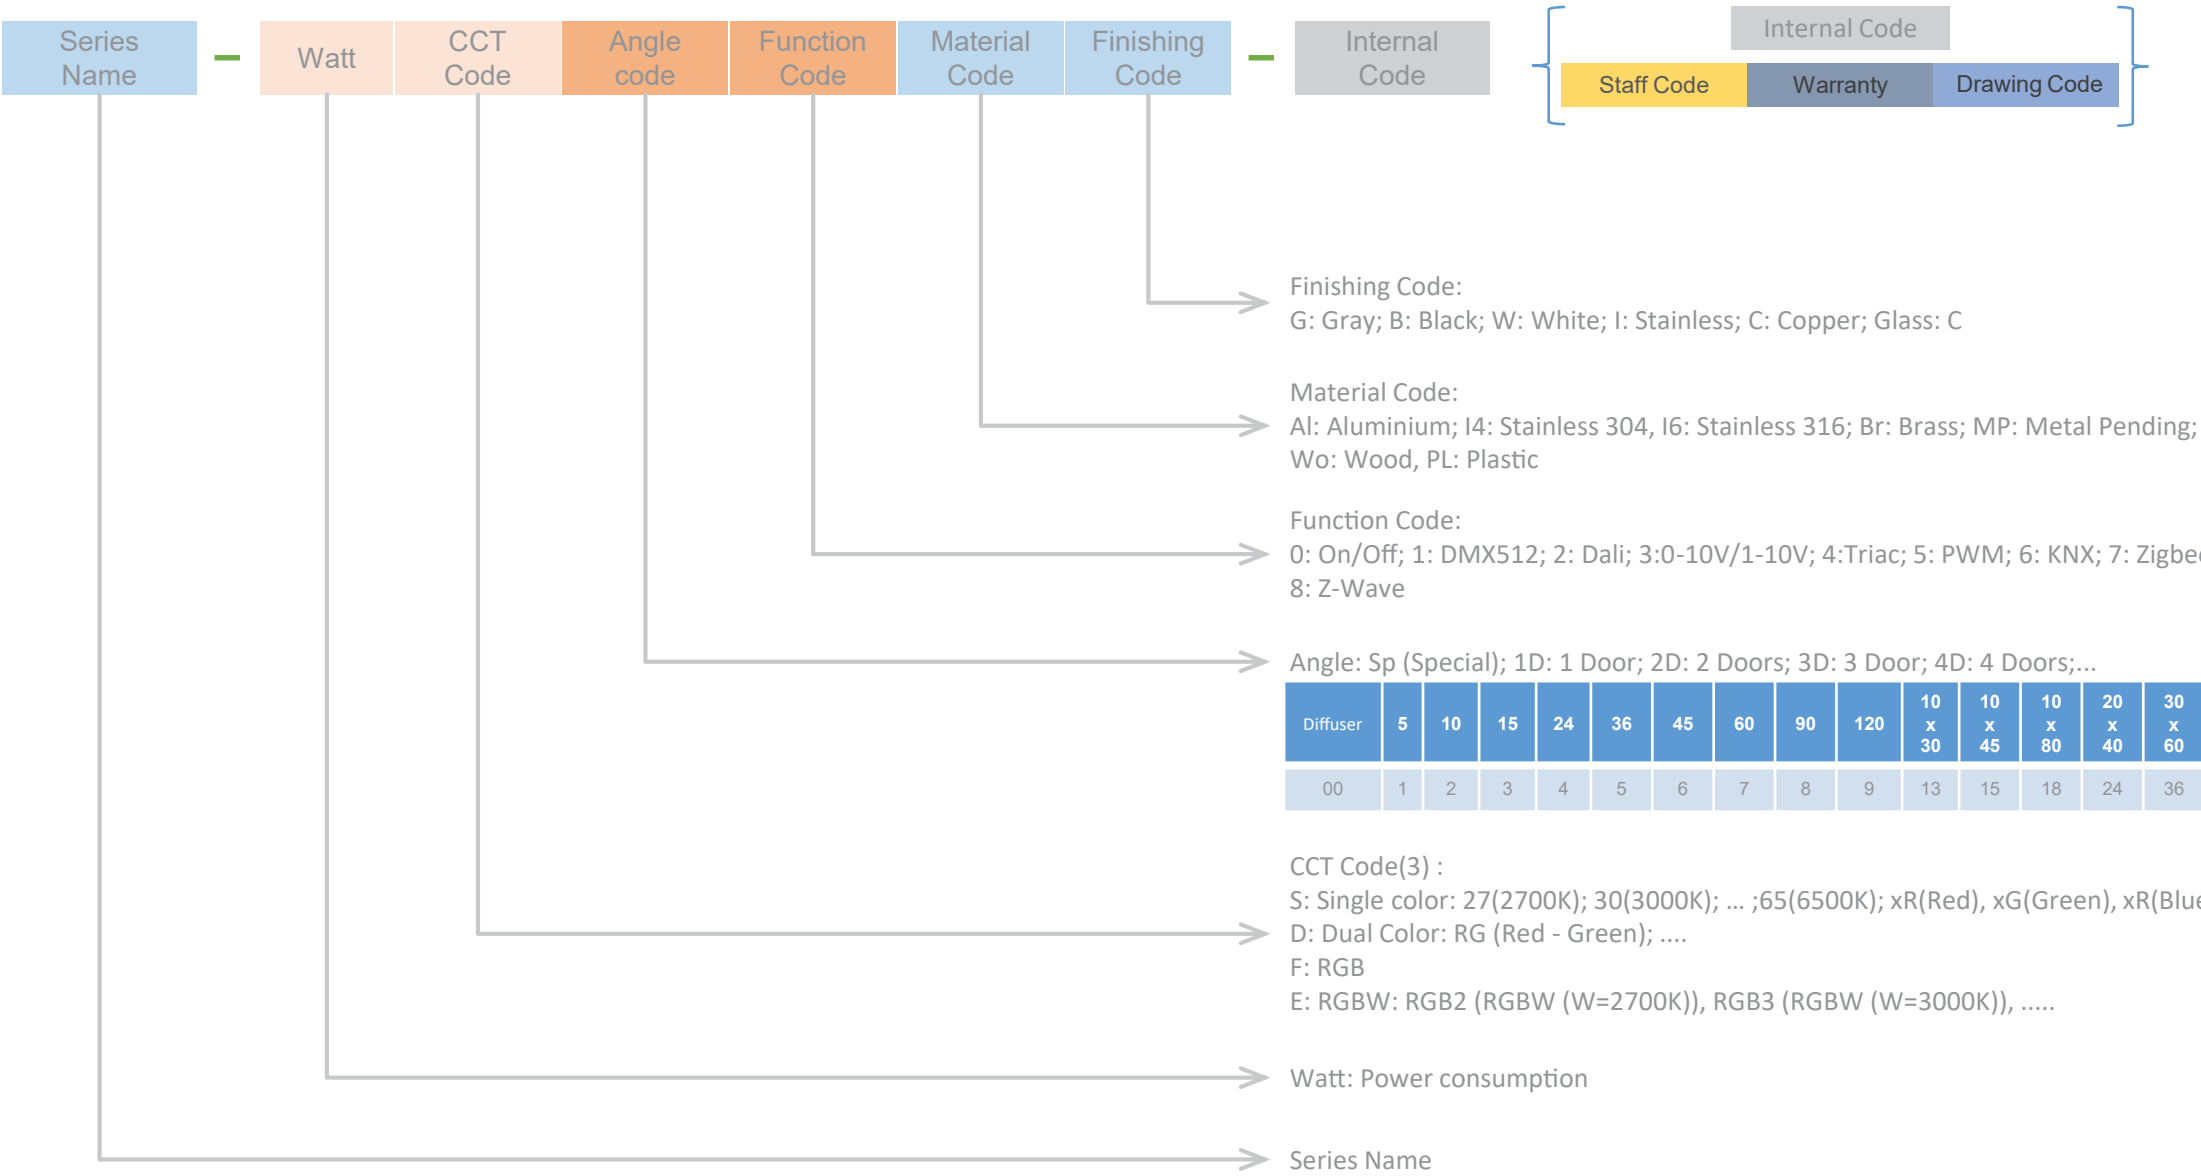

Diffuser	5	10	15	24	36	45	60	90	120	10 x 30	10 x 45	10 x 80	20 x 40	30 x 60
00	1	2	3	4	5	6	7	8	9	13	15	18	24	36