




Odino Series

Bollards and pathway luminaires

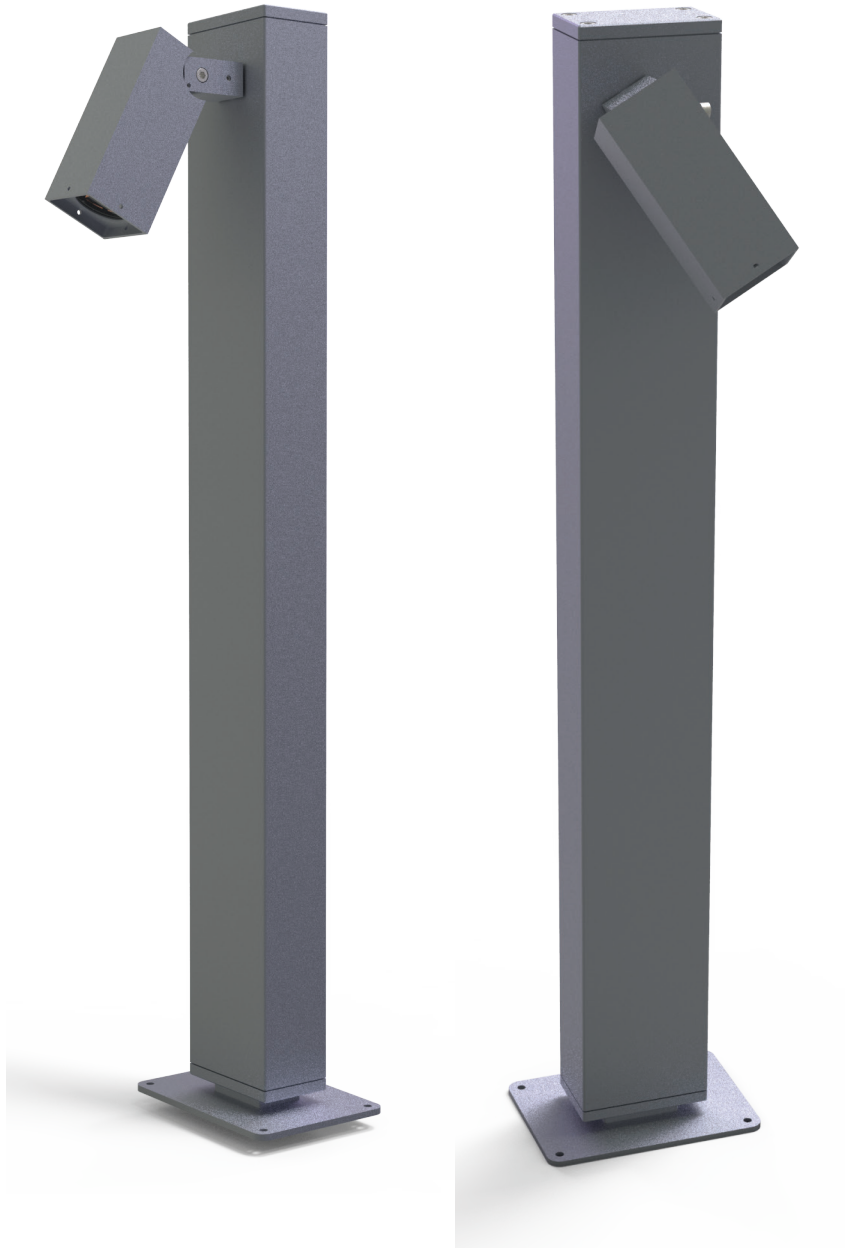

- Code Product: Odino Series
- Dimension: 60x98 x 600/800/1000 mm
- Input Voltage: 110-240VAC (43-60Hz)
- Power consumption: Series-M (7W, 9W, 12W)
- Luminous Flux: 1120Lm At 3000K, 45deg
- Brand of LEDs: LED CREE
- Color: 3000K - CRI>80 (Single Color: 2200 - 6000K)
- Beam Angle: Specical Light
- Function Dimmer: Option
- Material: Spcc
- Finishing (Color housing): Power Coasting
- IP Class: 65
- Electrical Class: I


- LED lifetime: 50.000hrs
- Lens:

Clear	Material PMMA with UV protection
Cellular	
Sand	
- Standards:
 - +EMC protection
 - +IEC 62031 LED modules for general lighting Safety specifications
 - +IEC 60598 Luminaires – Parts 1+2: General requirements particular requirements and tests



Pending

IP65

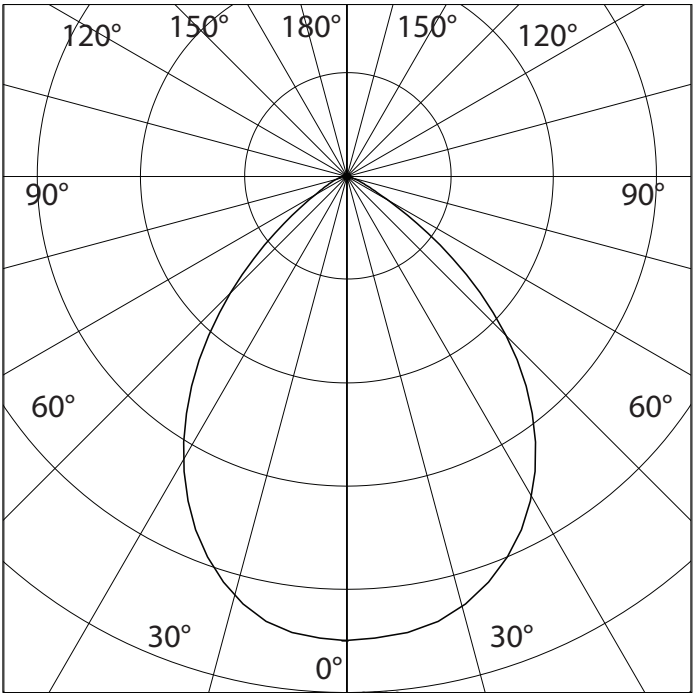

1120Lm At 3000K, 45deg

Product Description	
Control Gear	Fairchild Technology
LED Module	High-power LEDs on metal-core PCB. Collimating lens made of optical polymer/pmma
Anti-Glare	Option
Electrical Protection	EMC, inrush current
Electrical Class	1

