



Keral -Series

Wall Mounted Lighting



- Code Product: Keral-2 Series
- Dimension: Keral-2(Ø79mm x 295mm), Keral-1(Ø79mm x 157.5mm)
- Input Voltage: 110-240VAC (43-60Hz)
- Power consumption: Series (2x7W, 2x9W, 2x12W)
- Luminous Flux: Series
- Brand of LEDs: LED CREE
- Color: 3000K - CRI > 80 (Orther color: 2700K - 6000K)
- Beam Angle: Up=24°-Down = 24°(15°, 24°, 36°, 45°, 60°)
- Function Dimmer: Option
- Finishing (Color housing): Anodizing Topology
- IP Class: 65
- Electrical Class: I


- LED lifetime: 50.000hrs
- Lens: Clear
Cellular
Sand
- Standards:
 - +EMC protection
 - +IEC 62031 LED modules for general lighting Safety specifications
 - +IEC 60598 Luminaires – Parts 1+2: General requirements particular requirements and tests

Material PMMA
with UV protection



Pending

IP65

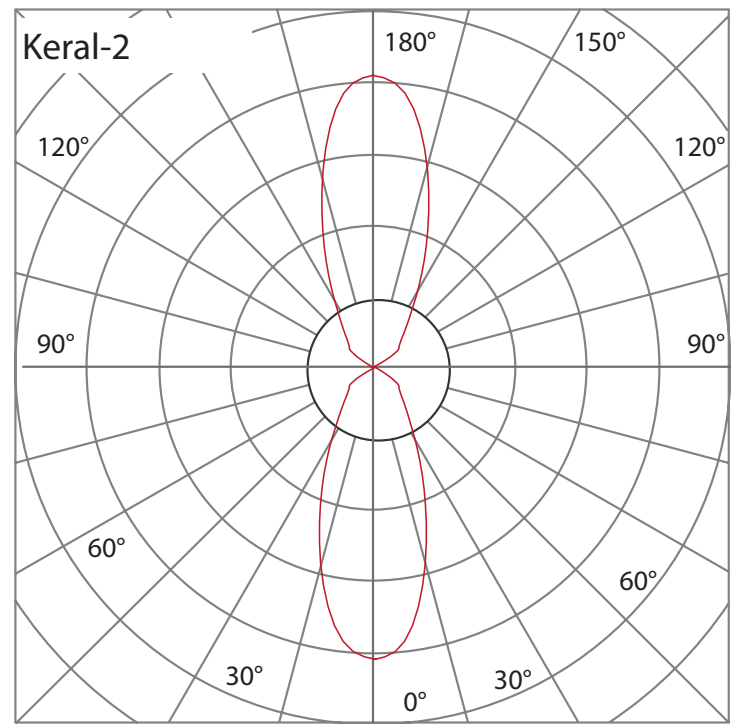

2 x 990lm at 2x12W, 15deg

Product Description	
Control Gear	Fairchild Technology
LED Module	High-power LEDs on metal-core PCB. Collimating lens made of optical polymer/pmma
Anti-Glare	Option
Electrical Protection	EMC, inrush current
Electrical Class	1

