



Nexi-2L Series
Wall luminaires surface mounted



- Code Product: Nexi-L Series
- Dimension: Ø110mm x 310mm
- Input Voltage: 110-240VAC (43-60Hz)
- Power consumption: 2 x 20W, 25W, 30W (Up-Down)
- Luminous Flux: 2x 2450Lm at 25W 3000K, 24deg
- Brand of LEDs: LED CREE
- Color: 3000K - CRI: >80
- Beam Angle: Up=25° - Down = 25° (15, 25, 36, 45)
- Function Dimmer: Option
- Material: Aluminium
- Finishing (Color housing): Anodizing
- IP Class: 65
- Electrical Class: I


- LED lifetime: 50.000hrs
- Lens: Clear
Cellular
Sand
- Standards:
 - +EMC protection
 - +IEC 62031 LED modules for general lighting Safety specifications
 - +IEC 60598 Luminaires – Parts 1+2: General requirements particular requirements and tests

Material PMMA
with UV protection



IP65

Pending

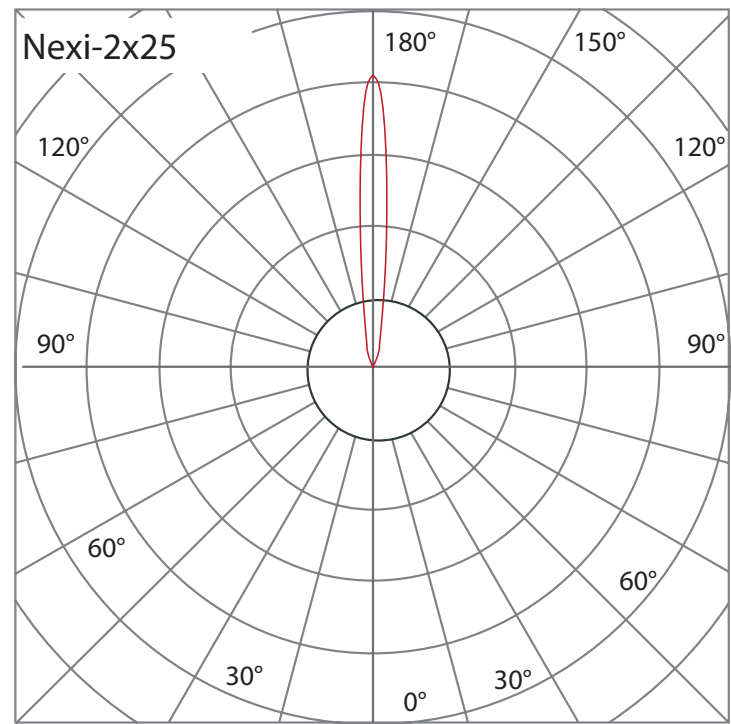

2x 2450Lm at 25W 3000K, 24deg

Product Description	
Control Gear	Fairchild Technology
LED Module	High-power LEDs on metal-core PCB. Collimating lens made of optical polymer/pmma
Anti-Glare	Option
Electrical Protection	EMC, inrush current
Electrical Class	1

