




Sana-15 Series

Projector for Facade Light

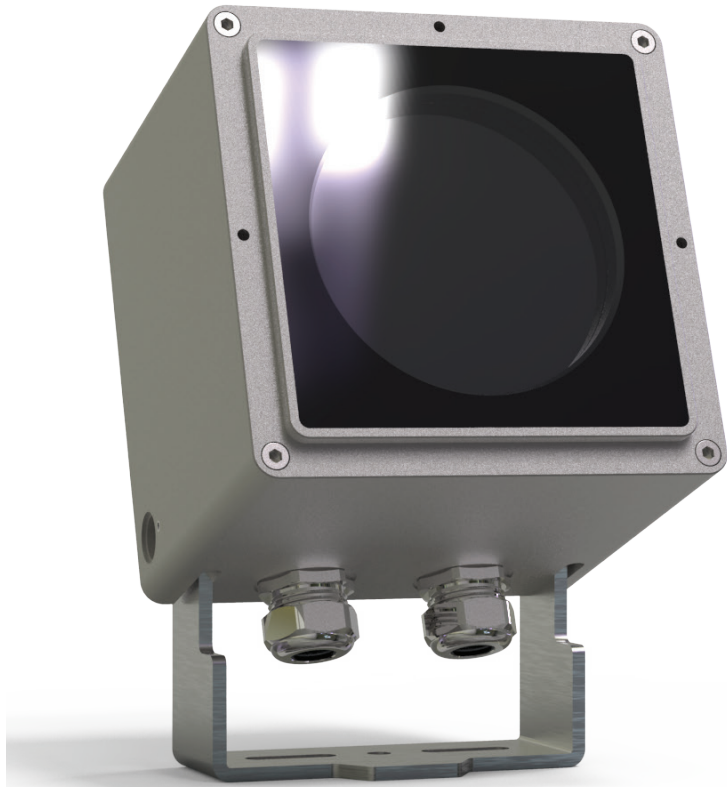

- Code Product: Sana-15 Series
- Dimension: 98mm x 98mm x 88mm
- Input Voltage: 24VDC / 110-240VAC (43-60Hz)
- Power consumption: Series 15 (15W - 22W)
- Luminous Flux: 1580Lm at 3000K, 60°, at 16W
- Brand of LEDs: LED CREE
- Color: 3000K, CRI > 90, 2-Step Macadam Ellipse
- Angle: 12° (12°, 24, 36°, 45°, 60°)
- Function Dimmer: None
- Material: Aluminium
- Finishing (Color housing): Anode Black
- IP Class: 66
- Electrical Class: I

- LED lifetime: 50.000hrs
- Lens: Clear
Cellular
Sand
- Standards:
 - +EMC protection
 - +IEC 62031 LED modules for general lighting Safety specifications
 - +IEC 60598 Luminaires – Parts 1+2: General requirements particular requirements and tests


Material PMMA
with UV protection



IP 66








Pending

Technical tolerance: 5%

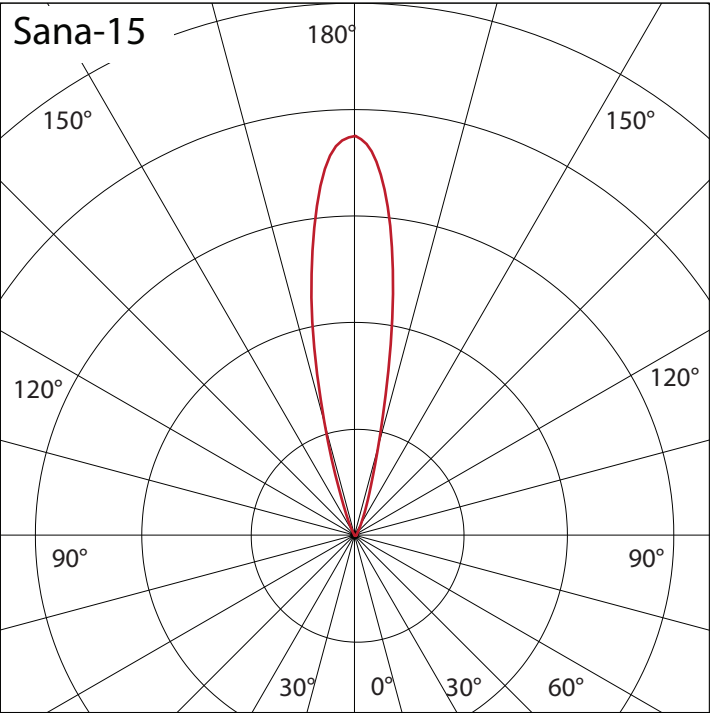

1580Lm at 3000K, 12°

Product Description	
Control Gear	Fairchild Technology
LED Module	High-power LEDs on metal-core PCB. Collimating lens made of optical polymer/pmma
Anti-Glare	Option
Electrical Protection	EMC, inrush current
Electrical Class	3

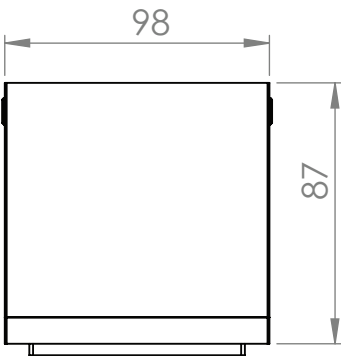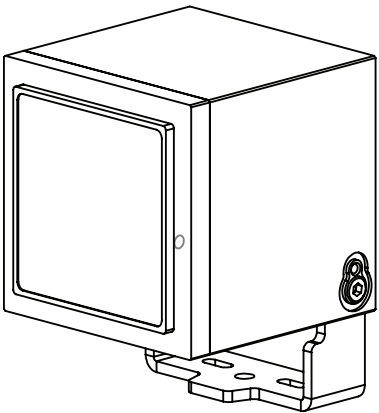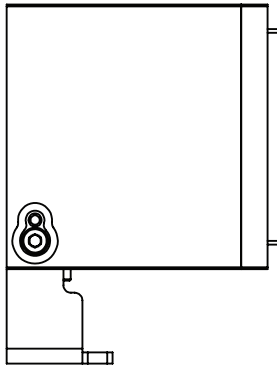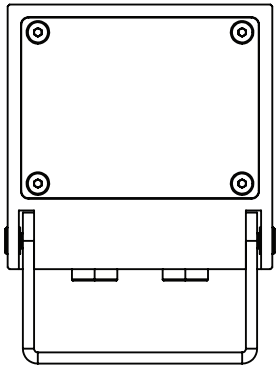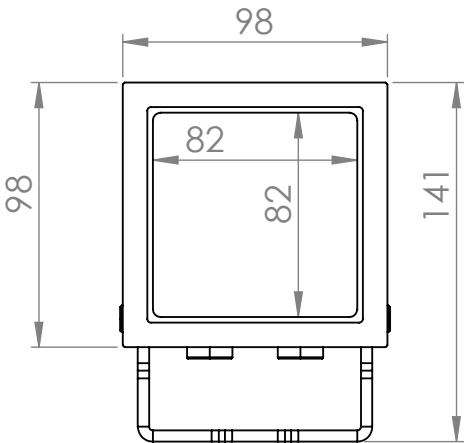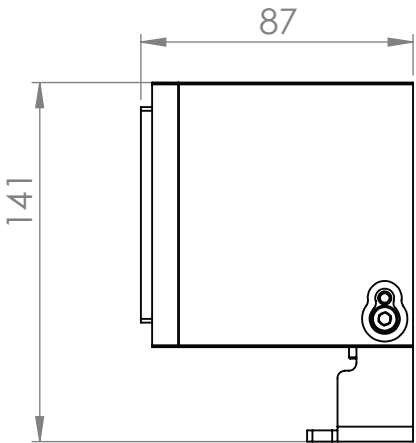

Spike accessories of Sana

