



Intis-Series
Ceiling luminaires





- Code Product: Intis-Series
- Dimension: S(Ø88x H102mm), M(Ø107x H107mm)
L(Ø118x H126mm), X(Ø138x H146mm)
- Input Voltage: 95-265VAC (43-60Hz)
- Power Consumption: Series
- Luminous Flux: 1190Lm at 12W, 3000K, 24Deg
- Brand of LED: LED CREE
- Color: 3000K; CRI >90 (2400K-5500K, Single Color)
- Angle: 12°, 24°, 38°, 45°, 60°, 90°
- Function: Option
- Material: Aluminium
- Finishing (Color housing): Anodizing Topology
- IP Class: 65
- Electrical Class: I

- LED lifetime: 50.000hrs
- Standards:
 - +EMC protection
 - +IEC 62031 LED modules for general lighting Safety specifications
 - +IEC 60598 Luminaires – Parts 1+2: General requirements particular requirements and tests






IP65

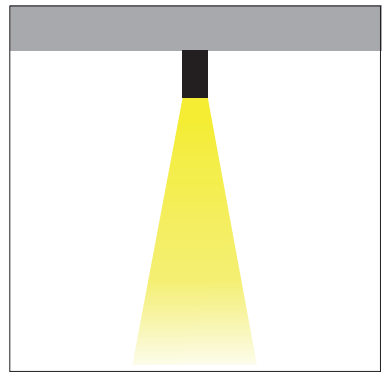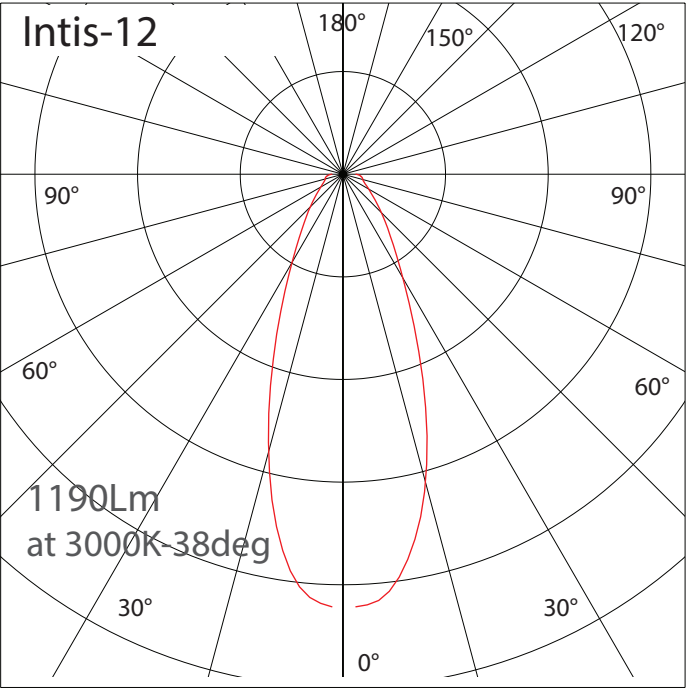

Type: Mount Ceiling Downlight

Product Description	
Control Gear	Fairchild Technology
LED Module	High-power LEDs on metal-core PCB. Collimating lens made of optical polymer/pmma
Anti-Glare	Option
Electrical Protection	EMC, inrush current
Electrical Class	1

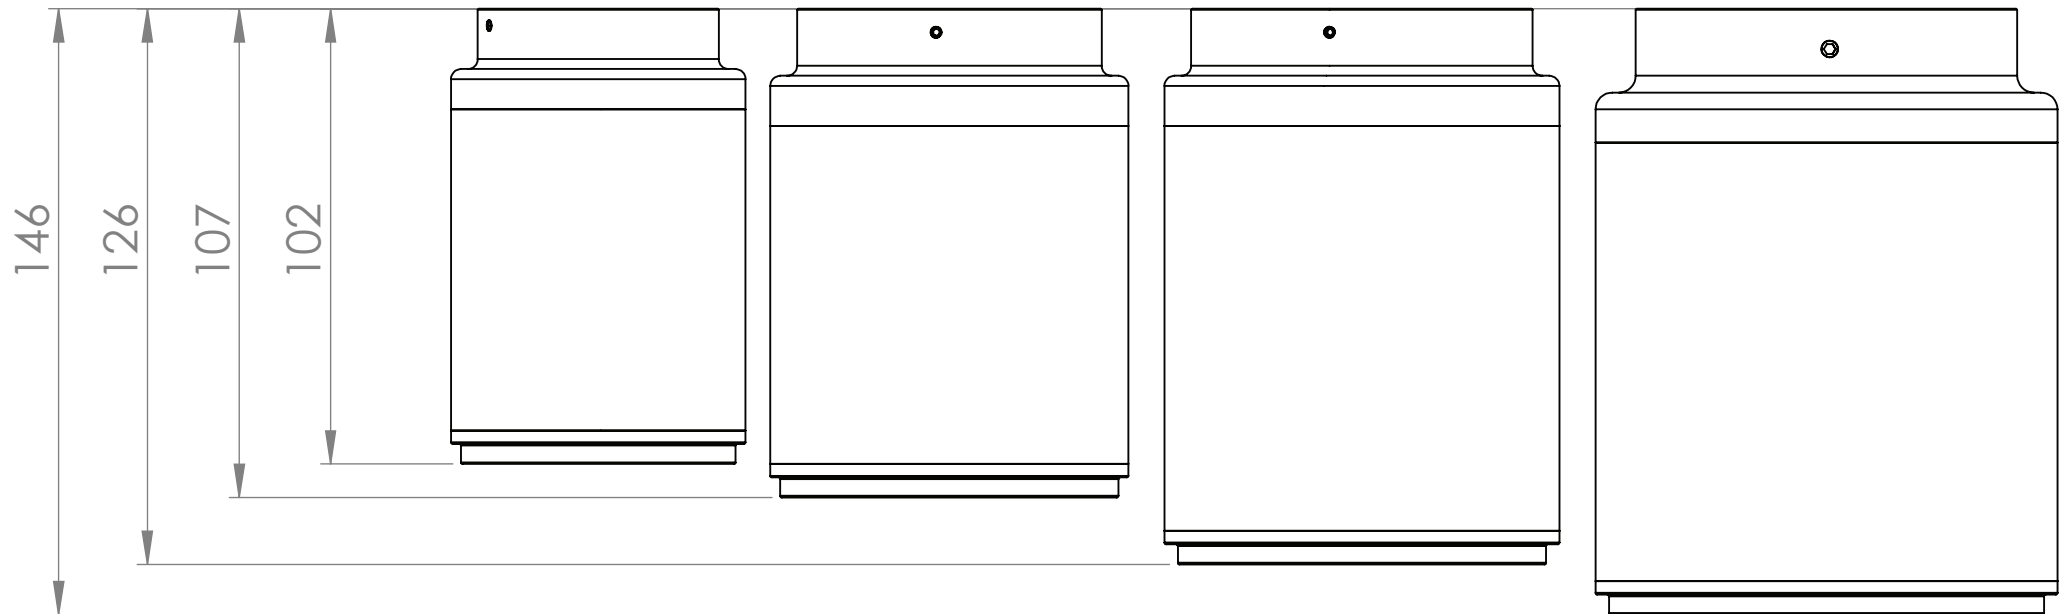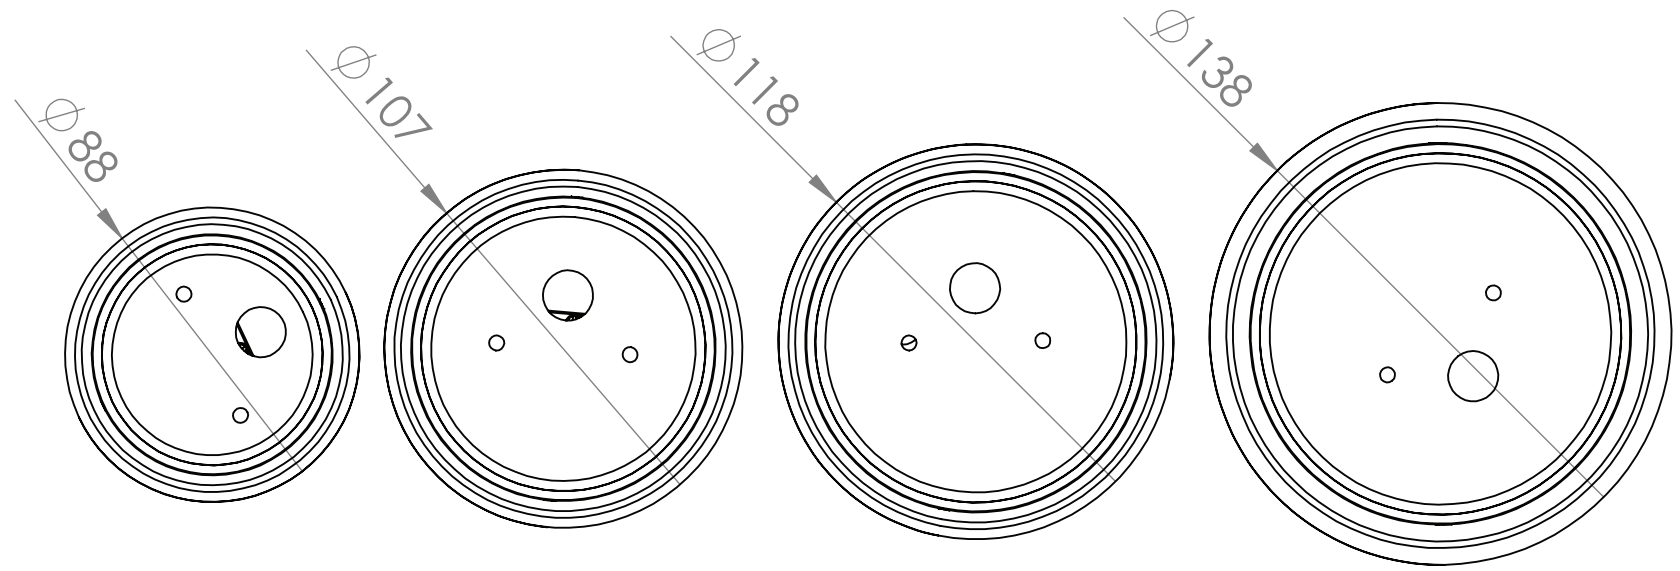

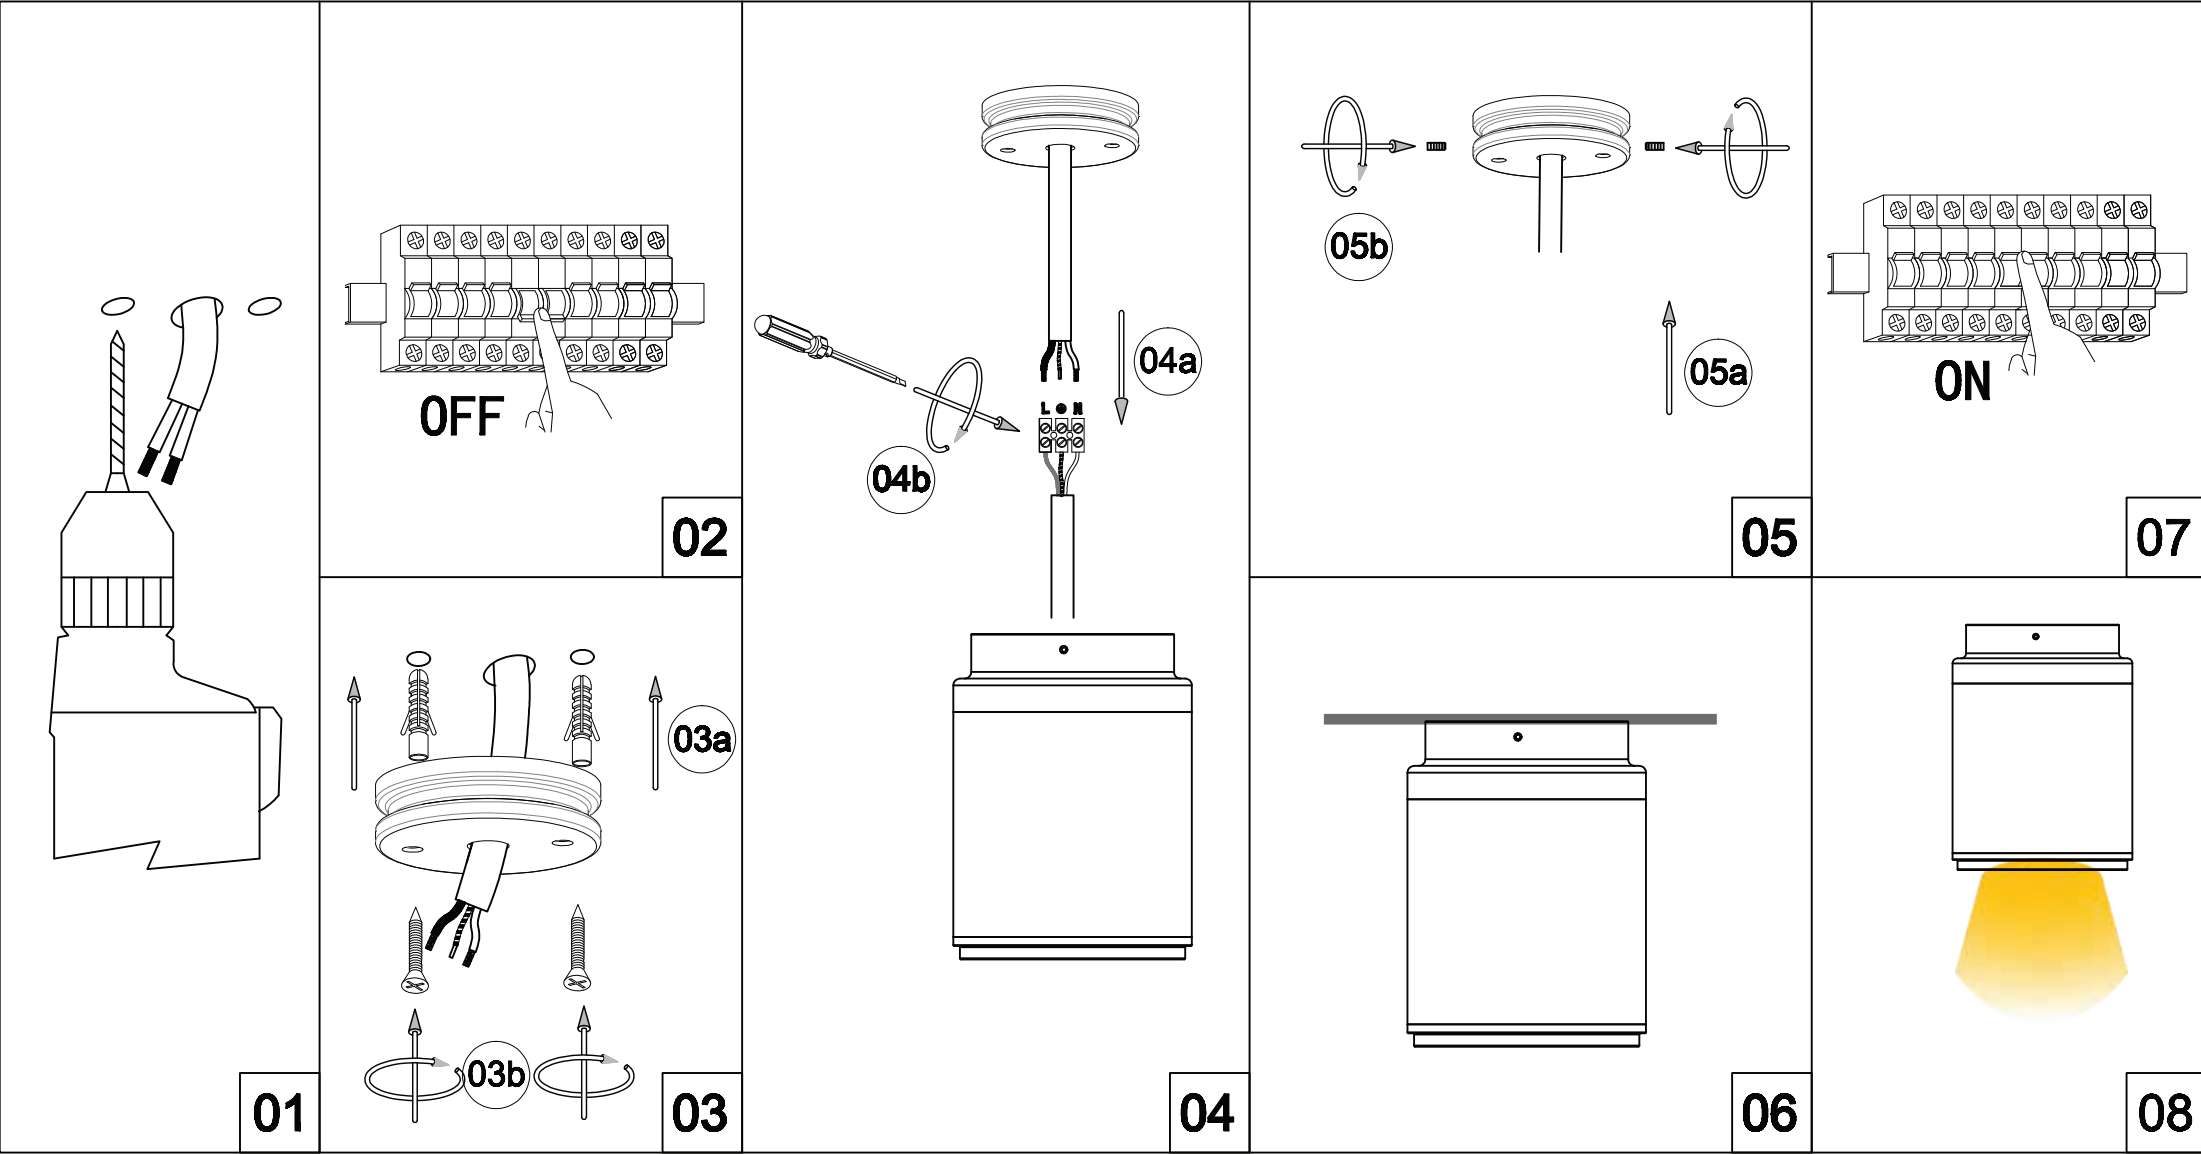

220VAC (50-60Hz)

