


TOP BEND 0606

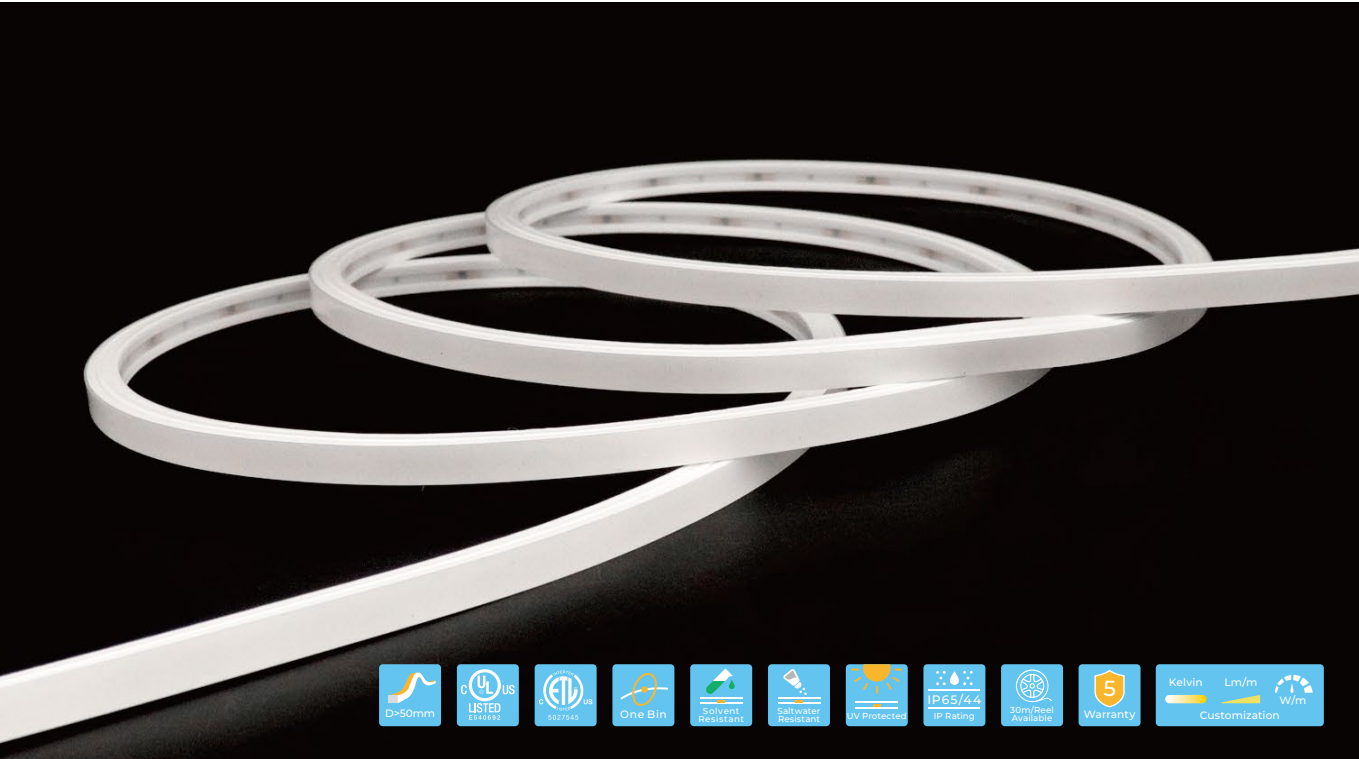


6mm slim luminous surface, sleek and refined, ideal for indoor outlines and furniture integration.

Tri-color silicone extrusion with a clear window for easy cutting.

High-density LED strip inside ensures uniform, glare-free light emission.


5 years warranty, lifespan ≥ 50,000 hours, 1 Bin.



Light Distribution Curve
(24V, 6W, 4000K)



Dimensions

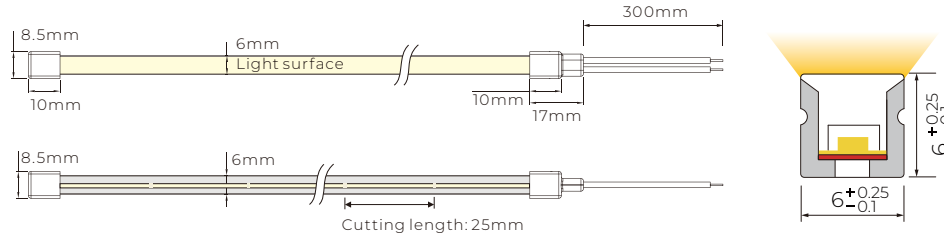

Basic Parameters

Model No.	NS-T0606
Voltage	DC24V
Power(w/m)	6W
Storage Temperature	-25°C~60°C
Ambient Temperature	Tamin=-25°C, Tamax (Table below)
Output	Low Output
Power(w/m)	6w
Max. Ambient tempt.(Tamax)	55°C



Single Color

Voltage	DC24 V
Circuit Design	CV
Power(w/m)	6w
Max. Run Length	5m
Cutting Length	25mm

Parameters


CRI	CCT	lm/m	w/m	lm/w
>90	1700K ⁺²⁰⁰ ₋₁₀₀	235.2	6	39.2
	2200K ⁺²⁰⁰ ₋₁₀₀	325.2	6	54.2
	2400K ⁺²⁰⁰ ₋₂₀₀	330	6	55
	2600K ⁺²⁰⁰ ₋₂₀₀	337.2	6	56.2
	2800K ⁺²⁰⁰ ₋₂₀₀	345	6	57.5
	3200K ⁺³⁰⁰ ₋₂₀₀	348	6	58
	3800K ⁺⁴⁰⁰ ₋₃₀₀	358.2	6	59.7
	4400K ⁺⁴⁰⁰ ₋₄₀₀	352.8	6	58.8
	5600K ⁺⁴⁰⁰ ₋₄₀₀	379.2	6	63.2

- Note:
- CV: Constant Voltage. CC: Constant Current.
 - Max. Run length refers to single side feed in serial connection.
 - The given color temperature is the temperature of finished products.
 - The given data are typical values. Due to tolerances of the production process and the electrical components,testing parameters can vary up to 10%.
 - The Constant Current version supports PWM dimming, but the PWM frequency must be kept below 2kHz.




End Cap & Cable Lead Option

Silicone End Cap (IP65)

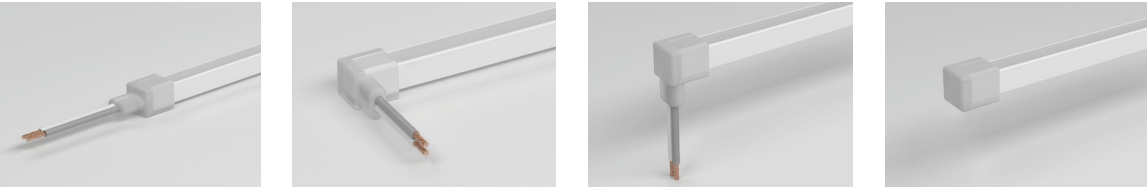

Front Cable Entry Side Cable Entry Bottom Cable Entry Closed end cap


Integral end cap (IP44)

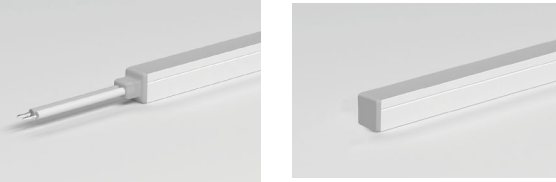

Front Cable Entry Closed End Cap



Accessories

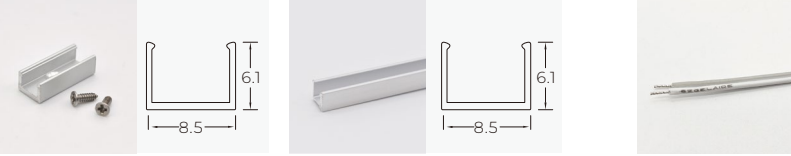

Aluminium Mounting clips Aluminium Profile 2 PIN Wire
Length: 1.5cm Length: 1m/2m/3m