

LED STRIP SPECIFICATION

SMD3030 80LEDs Sauna Room LED Strip



3030SMD 80LEDs LED Strip



Part Number: **AT80-S3030W30-W24-IP65** W27/W30/W35/W40/
W50/W60



Description

High temperature resistance **LUMILEDS LUXEON 3030 LEDs**




Food grade silicone extrusion process, **IP65 rating**

-25°C ≤ Ta ≤ 100°C

3 years warranty



Dimensions & Waterproof

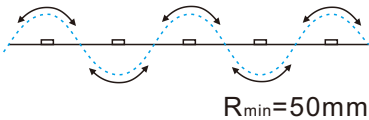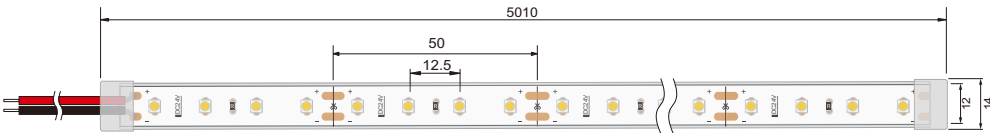

Product Specification

Dimension	5000x12x4.5mm
Chip Type	3030SMD
Chip Density	80LEDs/m
Step LEDs	4LEDs
Step Length	50mm

Voltage(V)	DC24V
Current(A/m)	0.2A / 0.4A
Power(W/m)	4.8W / 9.6W
Beam Angle	120°
Ambient temperature	-25°C~100°C


Product Photometrics

CCT (K)	CRI	Lumen(@4.8W/M) (lm/m)	Efficacy(@4.8W/M) (lm/w)	Lumen(@9.6W/M) (lm/m)	Efficacy(@9.6W/M) (lm/w)
2700K±100K	>80	782.4	163	1564.8	163
3000K±150K	>80	830.4	173	1660.8	173
3500K±200K	>80	840	175	1680	175
4000K ^{-200K} _{+300K}	>80	854.4	178	1708.8	178
5000K ^{-200K} _{+400K}	>80	854.4	178	1708.8	178
6500K ^{-500K} _{+100K}	>80	854.4	178	1708.8	178

3030SMD 80LEDs LED Strip



Light Distribution Curve[Data base on 1m IP20 3000K CRI>80 9.6w/m]

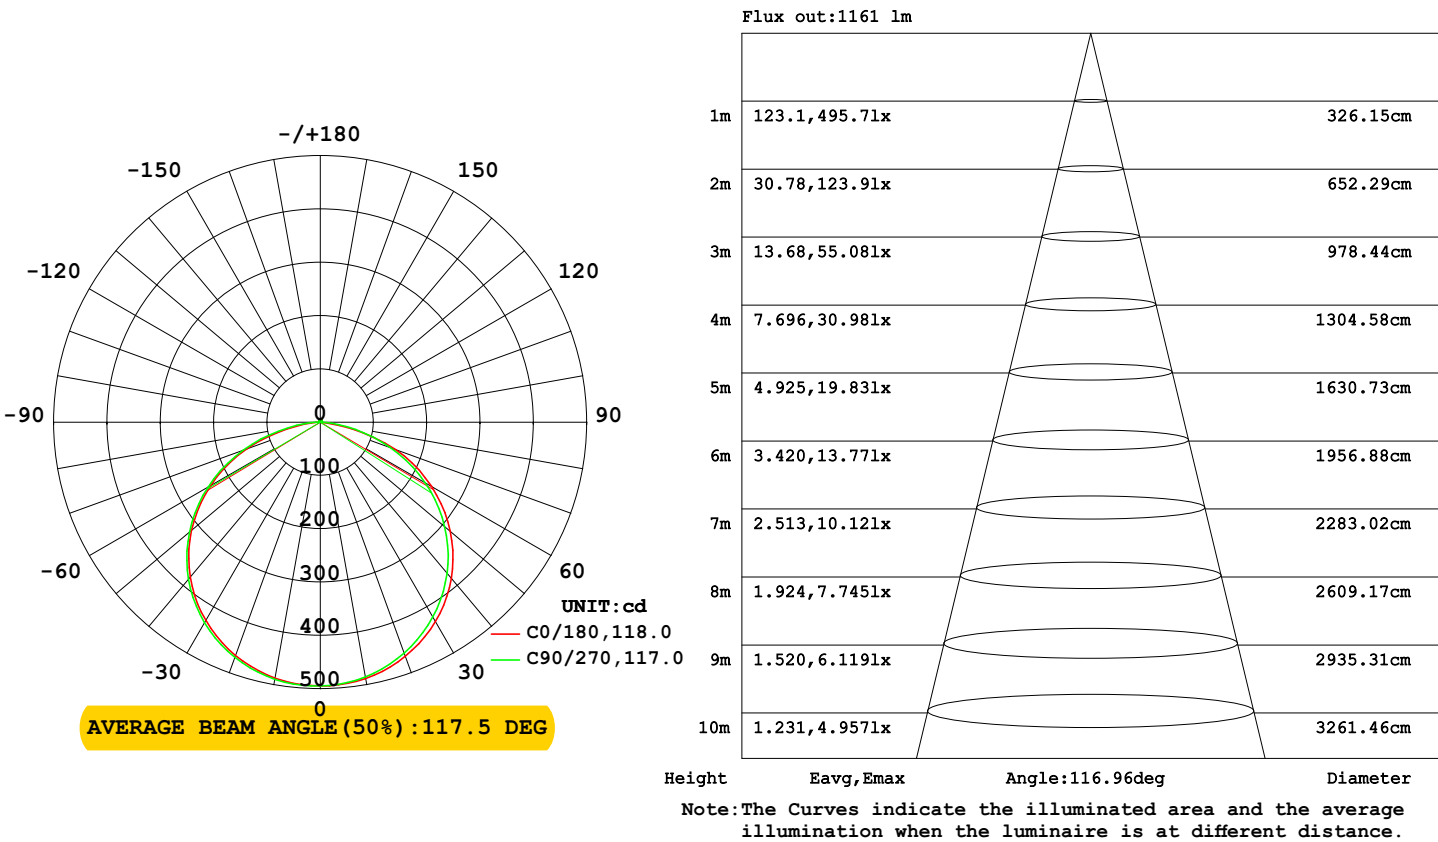

Packing Information

