



Mastro 16



- Code Product: Mastrol 16
- Input Voltage: 110-240VAC (43-60Hz)
- Output: 16 x DMX512
- Input Control: 1Gigabit Ethernet port with Multi Protocol: ESP, Art Net, StreamingACN, KiNet
- 1 RS232 input for profile selection via serial command
- Size: H43.6mm/1.72" W463mm/18.25" D250mm/10"
- Weight: 1.7kg
- Protection Class: IP20
- Display: LCD display (2 x 20 characters LCD display)


- Control Dimmer: DMX512 - 1990.
- Software Control: t-Color on SmartPhone
- t-Light on Window, Linux, MAC OS.
- Standards:
 - + RoHS; EMC protection
 - + EN 60598 2-5 IEC 60598-2-5
 - + EN 61347-2-4; EN 61047



Pending

IP20

Setup Diagram DMX512/RDM

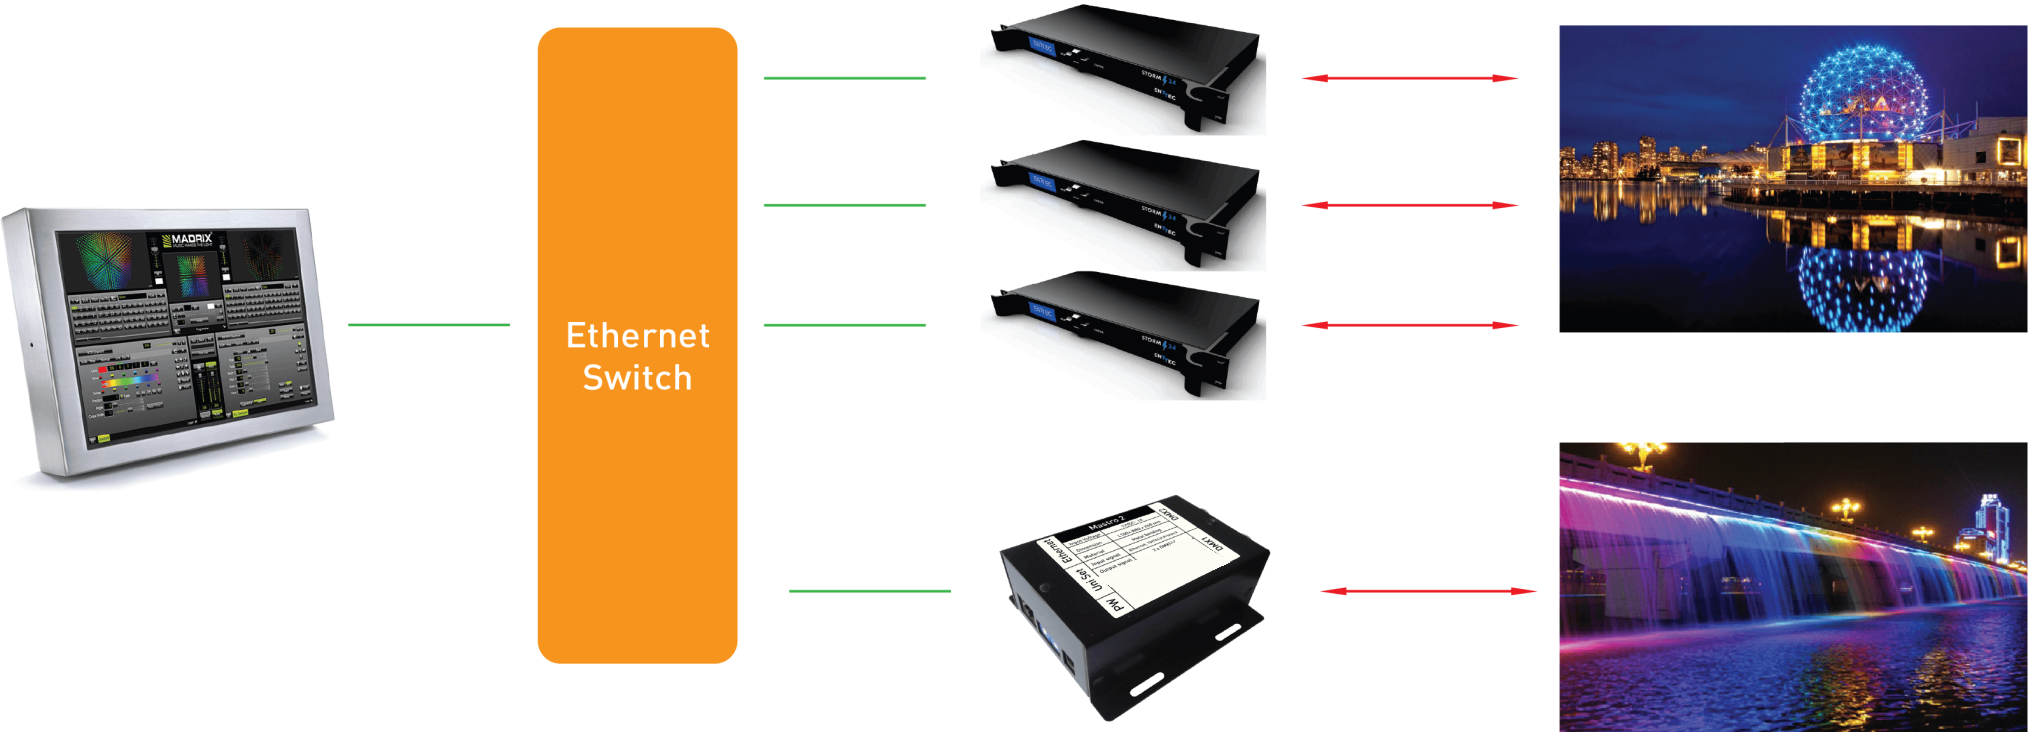

Show Creation RDM Message Handling	Signal Distribution	Ethernet (ESP,Art Net, StreamingACN, KiNet) to DMX512/RDM Gateway	DMX512/RDM fixtures
---------------------------------------	---------------------	---	---------------------

↔ DMX512/RDM
— ARTNET